
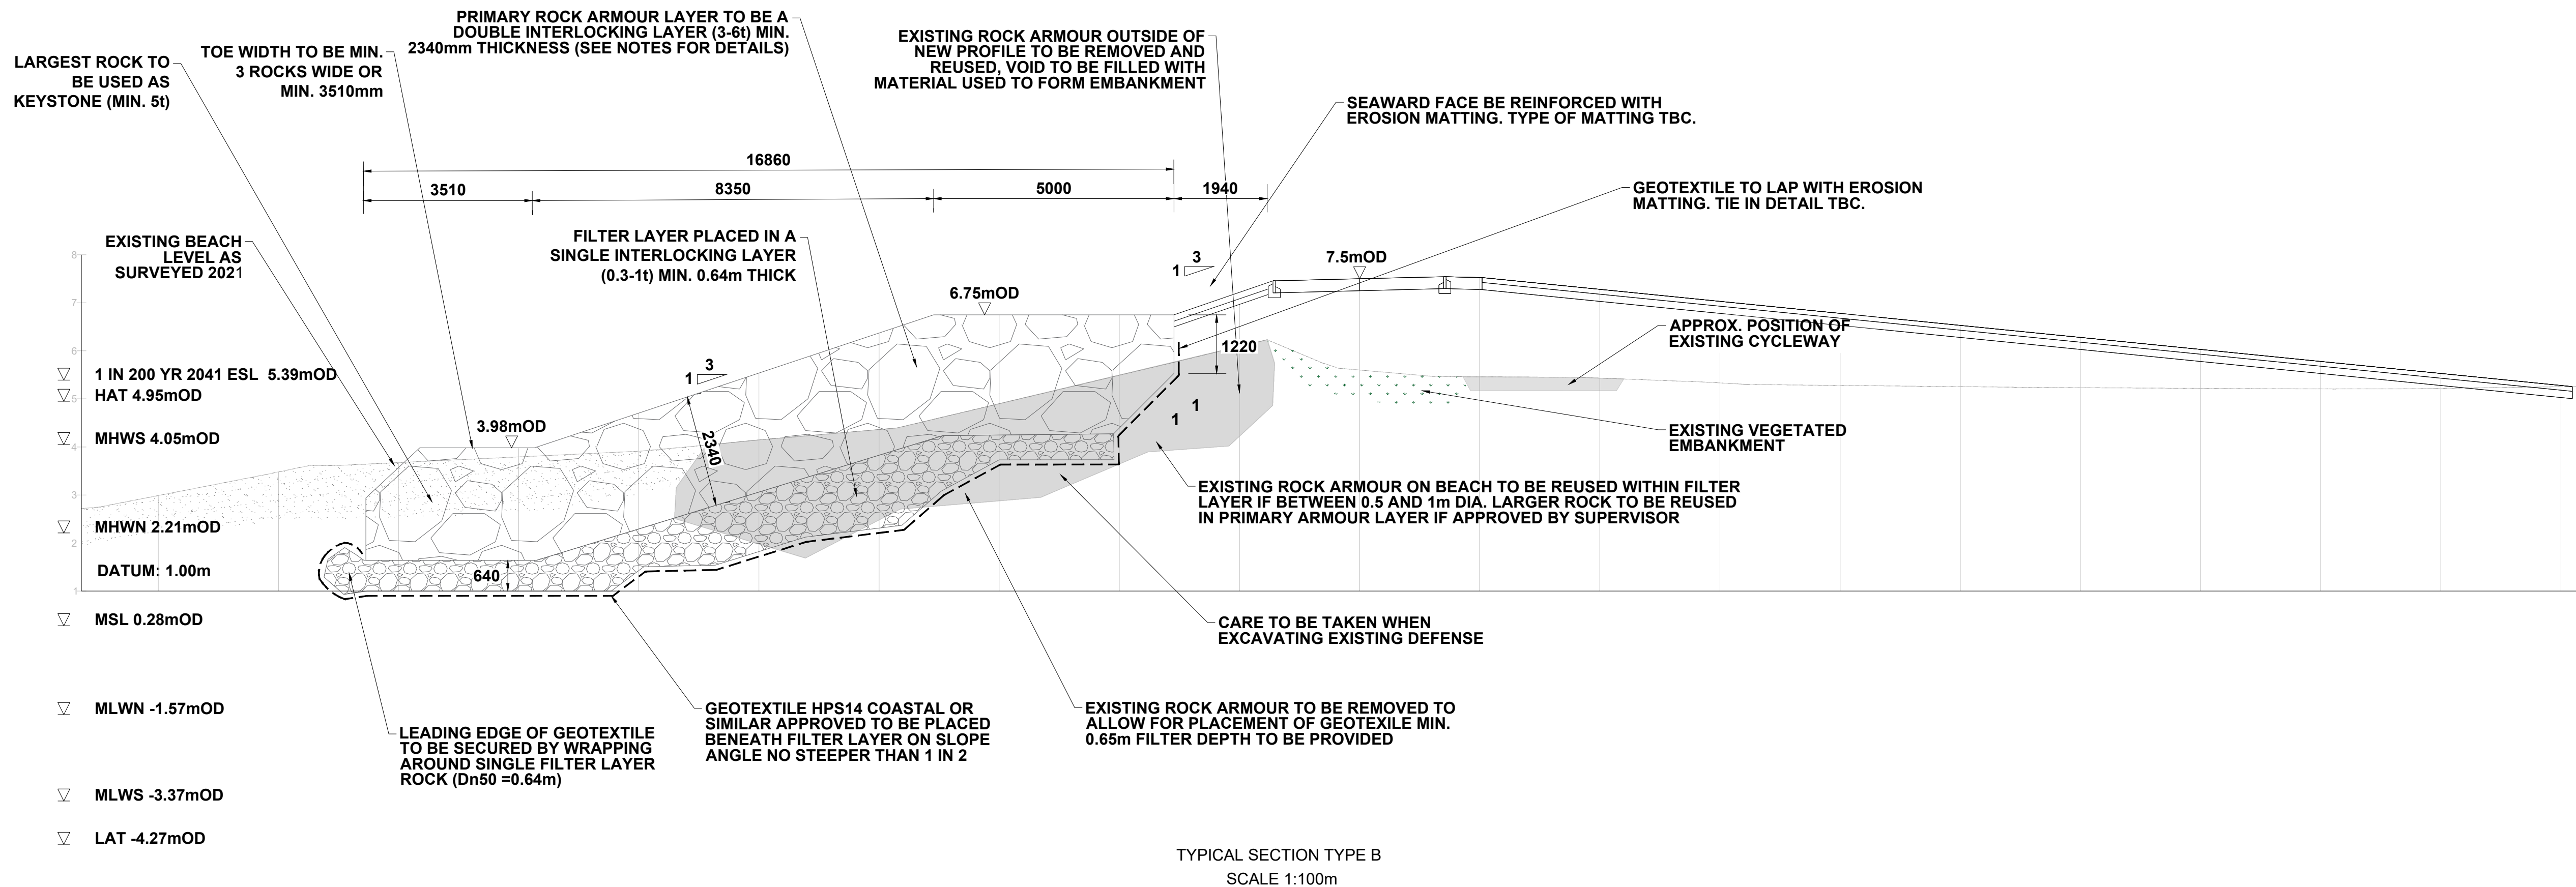


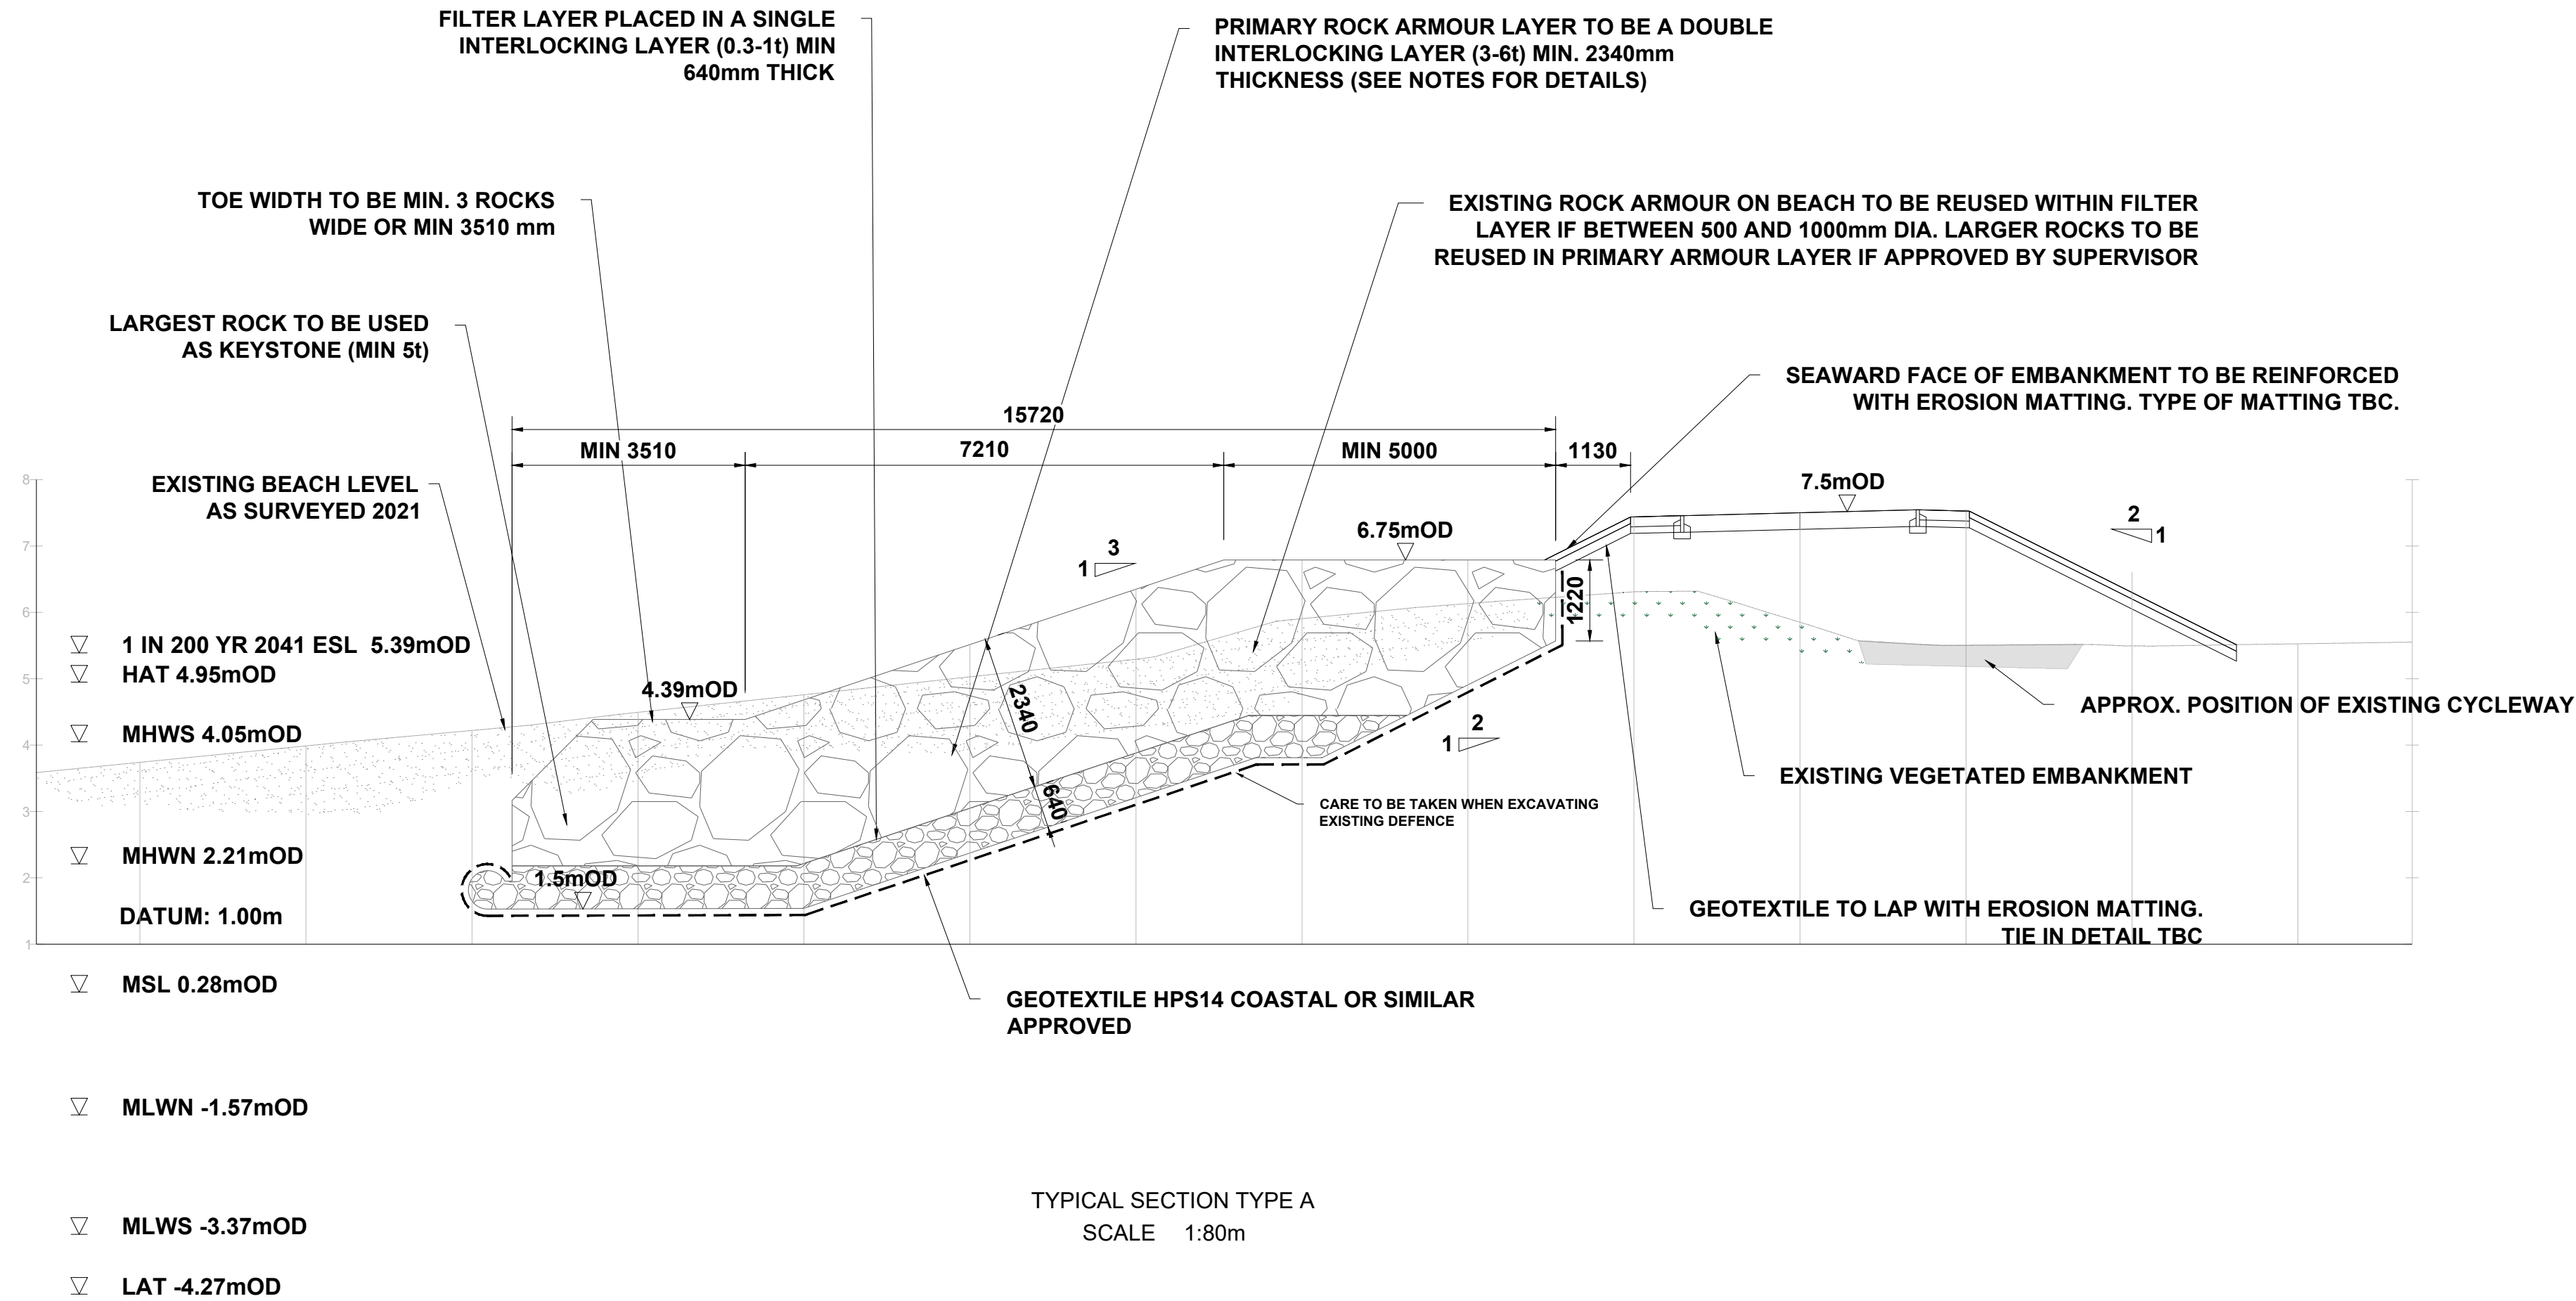

Zero Code

LOOKING OUT FOR ME, YOU AND EVERYONE

To report a Close Call: 0800 521 680

To report a CSD: 0844 761 6215

RESIDUAL DESIGN HAZARDS

(The following information has been collected from Preconstruction Information and the Amey CDM Hazard Management Process.)

1. Add Risks Here

NOTES

- Do not scale off this drawing.
- To be read in conjunction with dwg No. CH1701-AMEY-HGN-XX-DR-CH-2501
- All works shall be carried out with care to minimise the risk of pollution adhering to the guidance for pollution prevention
- All dimensions are specified in millimetres and levels are in metres above ordnance datum (mOD).
- Any discrepancies shall be noted immediately to the supervisor.
- The location of any services shown on this drawing are approximate and for guidance only.
- Primary armourstone to be sourced from standard European Grading 3-6t and secondary armourstone (filter layer) to be sourced from standard European Grading 0.3t-1t in accordance with BS EN 13393-1:2002.
- Rock armour layer thickness based on source rock density of 2.63t/m3 and surveyed using a highest point survey method. Prior to construction, the contractor shall confirm source material and proposed survey method to Designer to ensure presented dimensions in the drawing are appropriate.
- Existing rock armour to be reused in the filter or lower primary armour layer providing it meets the dimensional requirements outlined in the specification.
- All rock armour units are to be formed such that each layer is keyed into one another with a minimum of 5 points of contact.
- Tie in details to be confirmed on site prior to construction.
- Details of existing coastal defences unknown, care to be taken when dismantling and excavating around them.
- Surplus rock armour from existing defences to be re-used in the repair and re-installment of the existing rock groynes.
- Surplus beach arisings to be spread within existing groyne bay.

NOT FOR
CONSTRUCTION

P01.2	For Marine License Application	DW	WM	NT	12/09/2022
Rev	Revision details	Drwn	Chkd	Appd	Date

Designed:	DW	Date:	07/09/22
Drawn:	DW	Date:	07/09/22
Checked:	WM	Date:	XX/XX/22
Approved:	NT	Date:	XX/XX/22

ameyconsulting

LDĀDESIGN

JBA consulting

Client

CONWY

CYNGOR BWRDEISTREF SIROL
COUNTY BOROUGH COUNCIL

Ariennr yn Rhannol gan
Lywodraeth Cymru
Part Funded by
Welsh Government

Project Name

Llanddulas To Kinmel Bay
Coastal Improvements

Drawing Title

Llanddulas Beach Rock Armour
Typical Sections (CMU 3-2B)

Original Drawing Size : A1	Scale : As Shown
Dimensions : -	

Drawing Status	Suitability
WORK IN PROGRESS	S3

Drawing No	Rev
CH1701-AMEY-HGN-XX-DR-CH-2502	P01.2