

**NANT Y CAWS
PHASE 1
CLOSED LANDFILL**

**ENVIRONMENTAL
PERMIT 34183**

**2020 Annual Environmental
Monitoring Report**
Report Number 2119r1v1d0121

Commissioned by
Carmarthenshire County Council
Stephens Way
Pensarn
Carmarthen
SA31 8BG

Prepared by
Geotechnology Ltd
Ty Coed
Cefn yr Allt
Aberdulais
SA10 8HE



January 2021

Table of Contents

1 INTRODUCTION	1
2 OVERVIEW OF SITE ACTIVITY	2
2.1 Landfilling	2
2.2 Capping	2
2.3 Restoration	3
2.4 Leachate Management	3
3 REGULATORY FRAMEWORK	4
3.1 Leachate Level Limit	4
3.2 Leachate Chemistry Control Levels	4
3.3 Groundwater Compliance Levels	4
3.4 Surface Water Control Levels	4
3.5 Perimeter Gas Compliance Levels	5
4 MONITORING NETWORK PERFORMANCE	6
4.1 Monitoring Network	6
4.2 Sample Analysis & Laboratory Performance	7
4.3 Site Observations	7
4.4 Topographic Survey	7
5 LEACHATE	8
5.1 Leachate Quality	8
5.2 Assessment against Control Levels	9
6 GROUNDWATER	10
6.1 Groundwater Quality	10
6.2 Assessment against Compliance Levels	10
7 SURFACE WATER	12
7.1 Contributions	12
7.2 Quality	12
7.3 Assessment against Control Levels	14
8 PERIMETER GROUND GAS	15
9 SUMMARY AND RECOMMENDATIONS	16
9.1 Environmental Protection	16
9.2 Decommissioning and Surrender	16

List of Tables

Table 2-1	Summary of Key Dates	2
Table 3-1	Leachate Control Levels	4
Table 3-2	Trigger Levels for Emissions to Groundwater	4
Table 3-3	Control Levels for Emissions to Surface Water	4
Table 3-4	Landfill Gas in External Monitoring Boreholes Emission Limits	5
Table 4-1	Current Monitoring Programme	6
Table 5-1	Evaluation of Leachate Chemistry	9
Table 6-1	Comparison of Groundwater Chemistry with Compliance Levels	11
Table 7-1	Comparison of Surface Water Data with Emission Levels	14

List of Plates

Plate 7-1	View north over confluence just above sample point SW1	14
-----------	--	----

List of Figures

Figure 1	Site Location Plan
Figure 2	Available Monitoring Network
Figure 3	Conceptual Site Model

List of Appendices

Appendix 1	Laboratory Certificates
Appendix 2	Leachate Chemistry
Appendix 3	Groundwater Chemistry
Appendix 4	Surface Water Chemistry
Appendix 5	Isopachyte of Topographic Surface
Appendix 6	Soil Capping Investigation

1 INTRODUCTION

Carmarthenshire County Council (CCC) maintains Nant y Caws (NYC) Phase I Landfill which is located east of Carmarthen and west of Cross Hands (see Figure 1). The landfill is in Aftercare and has not accepted waste since March 1997. The landfill has been partially restored, with a full FML (Flexible Membrane Liner) placed over the capped area. The site is regulated by Natural Resources Wales (NRW) through Permit No. EA WML 34183.

The Permit requires routine environmental monitoring to be undertaken. Geotechnology Ltd (Geotechnology) has been commissioned by CCC to undertake the monitoring since April 2013 and to report the results. This annual review of the monitoring data is based on the available data gathered up to December 2020.

This report includes data provided to Geotechnology by third parties.

2 OVERVIEW OF SITE ACTIVITY

Key dates relating to the operation, closure, capping and regulatory control of the landfill are provided in Table 2-1. A detailed site plan showing surface topography and monitoring infrastructure is provided in Figure 2.

Table 2-1 Summary of Key Dates

Date	Activity
1984	Phase 1 Landfill designed
12 Dec 1985	Waste Disposal Plan (WDP) issued by Carmarthen District Council
1 May 1994	WDP converted to a Waste Management Licence (WML)
1997	Cessation of landfilling operations
1998	Installation of gas and groundwater monitoring infrastructure
Dec 1999	Final FML capping completed
1 Jan 2002	Modification to WML by Environment Agency
2002/2003	Geotechnology undertakes hydrogeological risk assessment and prepares monitoring action plans based on limited data set
2009	Leachate Breakout on Southern Bund – Remedial measures implemented
6 April 2010	WML automatically became an Environmental Permit in accordance with the Environmental Permitting Regulations (England and Wales) 2010
2010	Leachate treatment system undergoing improvements
20 Jan 2015	Landfill formally taken into Aftercare by NRW
2016	Permit Variation issued to operator of leachate treatment system (EPR/PP3338CQ) CWM Environmental placed soils over central part of aimed at restoring surface drainage patterns

Key features of the site are highlighted on Figures 2 and 3. The latter figure is a conceptual site model previously developed for a Hydrogeological Risk Assessment by Geotechnology.

2.1 Landfilling

The landfill was designed in 1984 by W.S. Atkins and Partners and was based on a containment principle. However, there are no details available to demonstrate that any form of engineered containment was adopted. Instead, the design is considered to rely on the in-situ glacial till to provide an impermeable base. A series of leachate interceptor drains are shown on the original site plans. The design drawings also show that Phase 1 was divided into a series of working cells with a total of 25 shown on the plan.

This original plan also describes the working method, which involved vertical layering with working faces of 2 to 2.5m which are then capped with 300mm of inert fill. Subsequent working faces were pushed over each completed layer to form four layers, giving a total landfill thickness of between approximately 8 and 10m. This data was broadly confirmed in subsequent drilling for internal gas wells in 1998, though a maximum waste thickness of 14m was obtained. It is known that over-tipping and further waste layering was undertaken at the site in late 1994 and early 1995 which may account for the increased thickness observed. The original design also shows that at the site boundary a cut-off ditch was constructed which is further isolated from the refuse by a clay bund.

Landfilling ceased in March 1997 and the landfill has not received any wastes since then.

2.2 Capping

During the operational period, measures were undertaken to reduce the leachate yield from the site in the form of FML applications to the flanks. Initially, a 0.5mm polypropylene membrane was used on the southwestern flank though this has been replaced by a 2mm

double textured HDPE. All the flanks of the landfill now have a 2mm textured HDPE cover, which in turn is welded to a 1mm smooth HDPE liner on the plateau cap. Prior to the final capping work being completed in December 1999, an intermediate layer of 0.5m of clay soil cover was placed, though it is locally thicker in hollows.

The Phase 1 landfill has therefore been capped since December 1999.

At the request of the CWM Environmental, an inspection of the capping was undertaken during July 2020. The assessment was aimed at assessing the thickness of soil cover at the site as part of a feasibility study evaluating using part of the site as a solar farm. The results of this assessment are included in Appendix 6.

2.3 Restoration

The agricultural restoration of the Phase 1 landfill continued from 1999 up until 2003, although there are no precise records. The restoration process involved the importation of sub-soils from many extraneous sources. Geotechnology undertook a soil audit of the areas completed up till November 2002. This is documented in Geotechnology report 237/0/1102 issued in November 2002. Geotechnology was not involved in the final stages of restoration at the landfill.

Agricultural post and wire fencing was placed and the surface was seeded to encourage surface soil stabilisation on the restored cap. The fields created by the fences are present today. The vegetation within the fields is, however, overgrown and does not appear to be being grazed or managed in accordance with the intention of the Post Closure Working Plan.

Following the removal of several stockpiles, CWM Environmental placed materials over the central part of the site during 2016. These works were aimed at reinstating the landfill landform and protection of the capping systems.

2.4 Leachate Management

The leachate at the site is collected by a gravity fed under waste drainage system comprising a 225mm diameter spine drain receiving inflows from 150mm diameter spur drains. The drainage system is accessed from the landfill surface by leachate inspection chambers, which rise through the waste. The chambers allow inspection of the leachate system and permit access for routine maintenance, leachate level measurement and cleaning. The position of each chamber has been re-surveyed by Geotechnology and is shown on Figure 2. Leachate inspection chambers 9 and 16 could not be found during the survey.

In addition to the under drainage works undertaken during the infilling, further leachate drains were installed at the toe of the flanks to intercept perched leachate which was historically observed to break out along the flanks. This work was completed during the capping period of the restoration in 1999. Both the toe drains and under drain system flow under gravity to the pumping sump from where the leachate is pumped, either to the nearby concrete lined leachate lagoon or the treatment plant. Following treatment, the leachate is discharged to the Afon Bantwen under discharge consent. An application to vary the Permit was prepared by Geotechnology, at the request of CCC in 2015, and this was accepted by NRW in 2016.

3 REGULATORY FRAMEWORK

The Aftercare Management Plan sets out the relevant regulatory framework against which the environmental protection measures should be evaluated. These criteria are summarised in the following sections.

3.1 Leachate Level Limit

The maximum level of leachate that should be observed from a leachate inspection chamber is 0.5m as measured from the base of the chamber.

3.2 Leachate Chemistry Control Levels

Control levels for assessing leachate chemistry are provided in Table 3-1.

Table 3-1 Leachate Control Levels

	Ammoniacal Nitrogen	Chloride	Potassium
	mg l⁻¹	mg l⁻¹	mg l⁻¹
Current Discharge Consent from Effluent Treatment Plant	4		
Leachate Quarterly Control Level for L1	70	250	140
Daily Leachate Control Levels	4		

3.3 Groundwater Compliance Levels

Current groundwater trigger and control levels are summarised in Table 3-2.

Table 3-2 Trigger Levels for Emissions to Groundwater

	Ammoniacal Nitrogen	Chloride	Potassium
	mg l⁻¹	mg l⁻¹	mg l⁻¹
Groundwater Trigger Level BH101, 103, 104, 105 and 117	10	250	40
Groundwater Control level BH101, 103, 104, 105 and 117	4	150	30

3.4 Surface Water Control Levels

Current surface water control levels are summarised in Table 3-3.

Table 3-3 Control Levels for Emissions to Surface Water

	Ammoniacal Nitrogen	Chloride	Suspended Solids
Location	mg l⁻¹	mg l⁻¹	mg l⁻¹
SW1	0.6	150	
Cap run-off discharge			50 mg/l
French Drain Discharge	4		

3.5 Perimeter Gas Compliance Levels

Currently applicable emission limits for the perimeter gas wells are summarised in Table 3-4.

Table 3-4 Landfill Gas in External Monitoring Boreholes Emission Limits

Perimeter gas position	Carbon Dioxide Action Level (% v/v)	Methane Compliance Limit (% v/v)
All positions	3	1

Action levels are for internal use by CCC while methane compliance limits are a Permit requirement.

4 MONITORING NETWORK PERFORMANCE

To demonstrate that the site is functioning as designed, a monitoring programme is being implemented. The current programme is managed by CCC with the monitoring of leachate quality, downgradient groundwater, surface water and external landfill gas currently undertaken by Geotechnology. Upgradient groundwater wells are sampled by the current operators of the adjacent operational landfill, CWM Environmental. The available monitoring infrastructure is shown on Figure 2.

A summary of the current monitoring programme is provided in Table 4-1.

Table 4-1 Current Monitoring Programme

Item	Monitoring Point	Type of Monitoring	Monitoring Frequency	Relevant Working Plan	Party Responsible
A	Landfill leachate level	Level and Conditional Observations	Monthly for 12 months starting 2014 and then quarterly	See WP10	Needs to be clarified*
B	Landfill leachate – L1	Composition	Six monthly	See WP10	Geo (access required)
C	Leachate Breakout - Phase 1 flanks (including toe drain)	Visual	Quarterly	See WP10	Geo
D	Upgradient Groundwater – BH203, BH205	Composition		Data provided by CWM Environmental	CCC/CWM
E	Downgradient Groundwater – BH101, 103, 104, 105, 117	Level	Quarterly	See WP11	Geo
F	Downgradient Surface Water – SW1, SW4	Composition	Quarterly	See WP12	Geo
G	Internal landfill gas	Composition	Monthly	See WP13	Infinis
H	French Drain	On-site measurement of composition	When observed to be flowing during inspections by WEBS	See WP12	Needs to be clarified *
I	Run-off Discharge	Composition	Quarterly	See WP12	Geo
J	Leachate Discharge	Composition	Monthly	See WP10	Needs to be clarified *
K	Contingency Surface Water Sample Points	Composition		See WP12	Geo
L	Perimeter landfill gas - BH102, 106, 107, 109, 110, 111, 113, 114, 115, 118, 119, 120	Composition	Quarterly	See WP14	Geo
M	Monitoring infrastructure integrity	Observational	Inspect each point when sampling	See WP10 – WP14	Geo
N	Topographic Survey and Settlement Assessment	Topographic Survey	Every 5 years starting 2015	See WP15	Geo

Note: * Geotechnology understands that CCS has appointed a new contractor to manage the leachate treatment system. It is unknown if the new contractor has been requested to continue to undertake the monitoring identified – this monitoring was previously undertaken by WEBS

4.1 Monitoring Network

Each time Geotechnology undertakes the monitoring, an inspection of the monitoring infrastructure is also completed. Since 2013, clearance of vegetation along the northwestern edge of the landfill has taken place. Routine control of the vegetation significantly aids the safe collection of samples.

Other minor repairs have been undertaken as required to headworks of several wells. Several headworks still however require improvement.

4.2 Sample Analysis & Laboratory Performance

Samples collected for laboratory testing were submitted to UKAS registered ALS laboratories in cooler boxes. The results from the laboratory analysis have been compiled as follows:

- Appendix 1: Laboratory Certificates
- Appendix 2: Leachate Chemistry
- Appendix 3: Groundwater Chemistry
- Appendix 4: Surface water Chemistry

In previous years, the operators of the leachate treatment plant undertook more frequent monitoring of the leachate prior to and following treatment. They also monitored the quality of a French drain along the southern perimeter of the site that was previously installed to collect leachate outbreaks. It is unclear if this data is still being gathered by the new contractor.

4.3 Site Observations

During the first round of sampling in April 2013, an oil sheen was noticed on the surface of the sample taken from BH104. This has not been observed since.

The restored landfill cap is largely covered by good vegetative cover and appears largely visibly stable. On the eastern flanks and most of the plateau, the landfill is parcelled into grassed fields. In some areas, drainage appears to be poor with reeds developing.

In recent years, the western and northern portions of the landfill have been reprofiled by CWM Environmental. Most of the flanks in the northern and western boundary of the landfill have self-seeded, resulting in the proliferation of many dwarf trees (mainly willow), gorse, broom and other flora. Whilst this is not in accordance with the species proposed in the Post Closure Working Plan, they have had the desired effect of stabilising the slopes, especially the near surface restoration soils. No evidence of instability, failure or leachate breakout was observed in the walkovers undertaken during 2020.

Leachate breakout has previously occurred on the southern bund of the landfill. Measures to collect and treat excess leachate have been implemented by CCC. In the same corner, the capping membrane HDPE is exposed and damaged over an area of approximately 1m². Based on visible vehicle tracks, Geotechnology suspects that trafficking has primarily caused the damage rather than any failure of the soil cover. In the southeastern corner of the landfill, Geotechnology suspects perching of leachate within the waste as the ground surface is soft and fully saturated.

The access road down to the leachate treatment plant is tarmacadam and is in good condition.

4.4 Topographic Survey


The landform at Phase 1 has been surveyed on many occasions, the most recent of which was in 2019 by Geotechnology, at the request of CWM environmental. Given this recent survey, the next topographic survey should be scheduled for 2024. An isopachyte comparing the 2019 land surface with the 2015 land surface is provided in Appendix 5.

5 LEACHATE

5.1 Leachate Quality

Leachate chemistry has been monitored between 1998 and 2002 and from December 2007 to 2020. The results are graphically illustrated in Appendix 2. More frequent monitoring of the leachate quality and discharge quality is undertaken by the contractor appointed by CCC to operate the leachate treatment plant. This data is reported in a separate annual report.

Leachate continues to be moderately mineralised with electrical conductivity of approximately 1000-1300 microS/cm. The dominant contaminants within the leachate are ammonia and potassium. The concentration of these parameters and others is variable but appears to be declining with time, although increased concentrations were detected in 2020. The variation in ammonia and chloride is shown below.

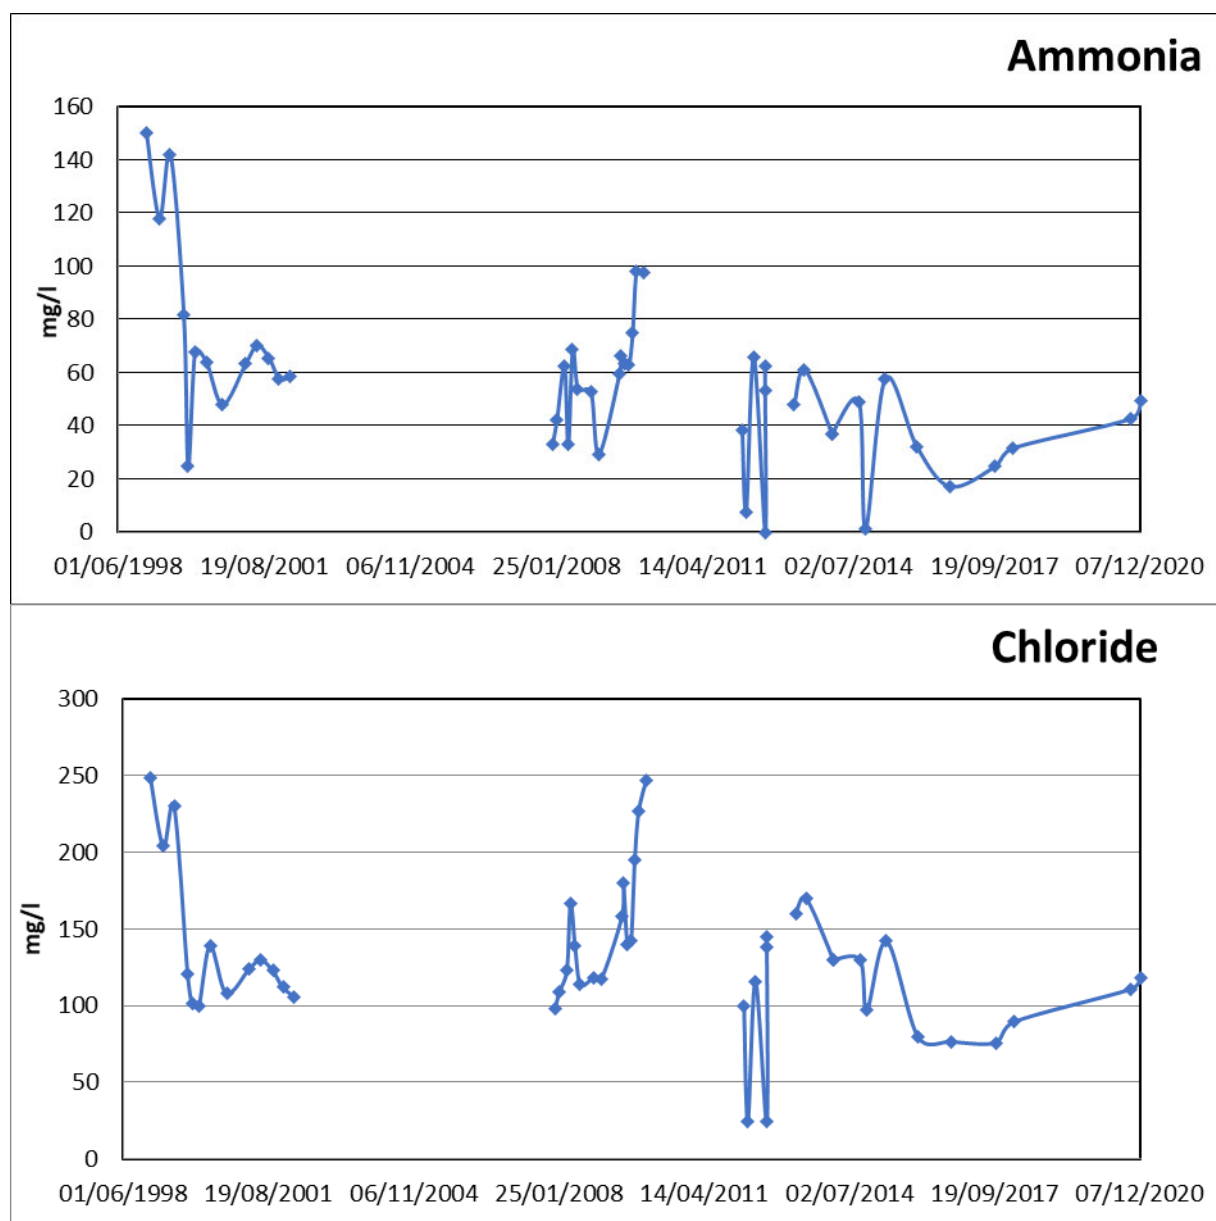

Trace metals within the leachate remained at very low concentrations during 2020, with several non-detectable and all below freshwater Environmental Quality Standards (EQS). Low level trace organics have also been detected in recent years. For instance, in 2017, <0.001 mg/l total PAH and 0.0012 mg/l mecoprop was detected and in 2018 0.00255 mg/l mecoprop. In 2020, mecoprop was below the level of analytical detection and the only PAH detected was Benzo(a)pyrene at 0.00000302 mg/l.

The leachate has been characterised by BOD values of <20 mg/l and total organic carbon (TOC) content of <50 mg/l suggesting that the biodegradable component is now low.

Given the potentially declining source concentrations, Geotechnology suggests that CCC maintains scrutiny of the leachate treatment requirements to ensure resources are being effectively used. The treatment goals and operation of the leachate treatment plant and the potential for cost savings using alternate techniques should be regularly considered at least every 5 years.

5.2 Assessment against Control Levels

The spot samples collected by Geotechnology to date indicate that leachate quality falls below the control levels (see Table 5-1). The more detailed routine monitoring undertaken by the leachate treatment operator should also be scrutinised.

Table 5-1 Evaluation of Leachate Chemistry

	Ammoniacal Nitrogen	Chloride	Potassium
	mg l⁻¹	mg l⁻¹	mg l⁻¹
Leachate Quarterly Control Level for L1	70	250	140
2016 Maximum value from spot sampling at L1	31.9	79.4	37.6
2017 Maximum value from spot sampling at L1	24.8	75.8	31.1
2018 Maximum value from spot sampling at L1	31.6	89.4	30.7
2020 Maximum value from spot sampling at L1	49.4	118	47.4

6 GROUNDWATER

All the groundwater results are provided in Appendix 3.

To assist with describing the hydrochemistry of groundwater within the vicinity of Phase I, several borehole groupings have been created. The groupings are summarised below and are based on the position of each monitoring position relative to Phase I (see Figure 2).

- BH203 and BH205 – Up-gradient of Phase 1
- BH117 – across gradient from Phase 1 on Eastern side
- BH108 – across gradient from Phase 1 on Western side
- BH101, BH103, BH104 and BH105 – Down-gradient of Phase 1

Results for BH108 and BH117 are only available since 2008, whereas downgradient monitoring records are available since 1998.

6.1 Groundwater Quality

The persistent relatively low electrical conductivity (350-550 microS/cm) of the circumneutral downgradient groundwater indicates that groundwater is of relatively good quality despite the proximity of the monitoring positions to the unlined landfill. Groundwater is less mineralised than leachate but does become locally, slightly more mineralised in the wells along the southern edge of the landfill. In recent years, ammonia has failed to be detected in any groundwater wells downgradient of the site (apart from 0.676 mg/l at BH117 in September 2020) and potassium has been below 1.3mg/l.

Trace elements have been detected, at times, in groundwater downgradient of the landfill but at low concentrations. In 2020, no substances were found above their freshwater EQS.

Hazardous substance cadmium has previously been detected in groundwater upgradient and downgradient of the landfill but at a concentration lower than the freshwater EQS. Neither cadmium, mercury or lead were detected during the latest year of monitoring. Nickel was detected on two occasions, both at BH104, but at concentrations below freshwater EQS.

Given the low TOC content of leachate, all groundwater samples have previously been found to contain <25 mg/l TOC, suggesting that the landfill is not a significant source of organic contaminants. In 2019, the maximum concentration of PAHs detected was 0.000363 mg/l. In 2020, 0.00438 mg/l total PAH was the highest concentration detected. Mecoprop has not been found above the detection limit in any samples tested in 2019 or 2020.

6.2 Assessment against Compliance Levels

The groundwater chemistry observed in 2020 is similar to that observed previously and no breaches of the control and trigger levels occurred, as shown by the summary in Table 6-1.

Table 6-1 Comparison of Groundwater Chemistry with Compliance Levels

	Potassium	Ammoniacal Nitrogen	Chloride
	mg/l	mg/l	mg/l
Trigger Levels (BH101, 103, 104, 105 and 117)	40	10	250
Control Levels (BH101, 103, 104, 105 and 117)	30	4	150
Maximum Value in Groundwater (2016)	4.39	0.631	26.8
Maximum Value in Groundwater (2017)	1.21	0.39	25.6
Maximum Value in Groundwater (2018)	0.966	0.261	25.3
Maximum Value in Groundwater (2019)	1.13	<0.2	25.3
Maximum Value in Groundwater (2020)	1.23	<0.2	24.5

7 SURFACE WATER

All the surface water results are presented in Appendix 4.

7.1 Contributions

Sample points SW1, SW2, SW3 and SW4 monitor the stream that runs west to east along the southern boundary of the landfill. The location of the surface water sample points is shown on Figure 2.

Surface water quality is primarily influenced by input from the CWM treatment lagoons west of the site, the level of leachate treatment achieved at the Phase I treatment plant and surface run-off containing elevated suspended solids from the landfill upgradient of Phase I.

7.2 Quality

Surface water quality observed during 2020 is similar to that observed previously.

The quality of surface water leaving the site at SW1 (the furthest point monitored downgradient of the site) is typically improved (more dilute) than the quality issuing into the stream just upstream of SW4 from the settlement lagoons to the west. As highlighted by the graphs reproduced below and further graphs in Appendix 4, this is best observed by comparing the higher concentration of several parameters observed at SW4 with the lower concentrations at SW1. This evaluation demonstrates that water quality at SW1 is dominated by the water quality at SW4 which in-turn is directly downgradient of the CWM settlement lagoons and not related to the Phase I closed landfill or leachate treatment.

Increased concentrations of suspended solids, potassium and chloride are sometimes observed at SW1. This is considered to be due to run-off from the upgradient phases of landfill that enters the stream just above the sample point. This run-off enters from the north and can be traced back to sources upgradient of the Phase I landfill – primarily mobilisation of sediment from access tracks / open areas. This input can be clearly seen in Plate 1.

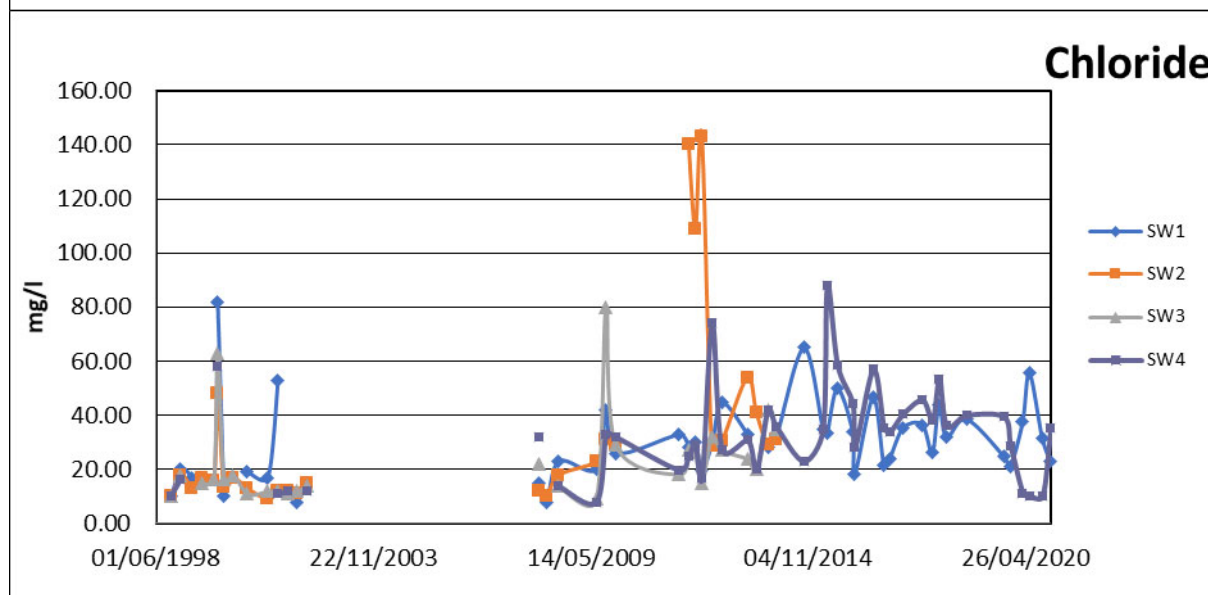
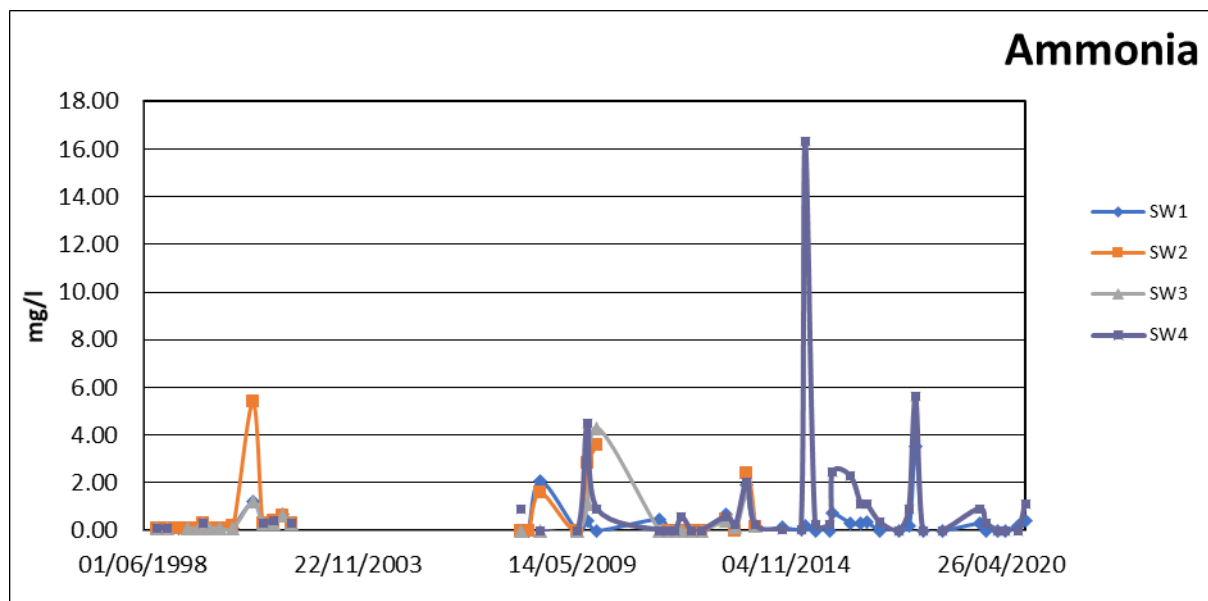




Plate 7-1 View north over confluence just above sample point SW1

7.3 Assessment against Control Levels

All surface water quality was below the emission limits in 2020, as summarised in Table 7-1, apart from elevated ammonia. As can be seen by reviewing the graph above, the cause of the increased ammonia at SW1 is due to elevated ammonia upstream of the landfill at SW4. This is linked to the discharge from the lagoons to the west of the site.

Table 7-1 Comparison of Surface Water Data with Emission Levels

	Ammoniacal Nitrogen as N	Chloride	Suspended solids
	mg/l	mg/l	mg/l
	Ammoniacal Nitrogen	Chloride	Suspended Solids
Location	mg l ⁻¹	mg l ⁻¹	mg l ⁻¹
Control Levels			
SW1	0.6	150	
Cap run-off discharge			50
Max values in 2017			
SW1	0.2	26.1	
Max value in cap runoff			5.95
Max values in 2018			
SW1	3.51	44	
Max values in 2019			
SW1	0.299	24.9	25.9
Cap run-off	-	-	12
Max values in 2020			
SW1	0.399	55.6	
Cap run-off			<2

8 PERIMETER GROUND GAS

During the quarterly monitoring undertaken since April 2013, all methane concentrations have been below the Permit threshold. Methane has been below 0.3% at all monitoring positions since 2014 apart from during 2020 when 0.4% was reported by the instrument.

Carbon dioxide (CO₂) has been detected at several positions along the eastern boundary (BH114, BH115, BH116 & BH118). The latest monitoring is broadly similar to the previous results with all wells found to contain ground gas with less than 0.4% carbon dioxide apart from BH116. At this position, 2.4% was detected at the end of Q3 and 4.8% in Q4 2019. In 2020, 4.8% was detected again at BH116 and 3.7% at BH117. Gas flow was measured to be <0.1 l/h on all occasions apart from a reading of 0.3l/h at BH116.

9 SUMMARY AND RECOMMENDATIONS

9.1 Environmental Protection

The available data reveals a declining leachate source term. Consequently, the risk to the environment is reducing. With this in mind, CCC should regularly review the operation of the leachate treatment plant to ensure it is an efficient use of resources.

Groundwater and surface water monitoring completed in support of the Permit at Phase I has shown that the landfill is currently having limited impact. The available information shows that the quality of groundwater has not significantly deteriorated since the start of monitoring in 1998.

Potassium is a key contaminant within leachate and despite the mobility of this element it is not significantly elevated in downgradient groundwater. The reason that the landfill is not having a significant impact on groundwater is suspected to be because groundwater has a higher piezometric surface than the basal drainage system of the landfill. The basal drainage system, therefore, intercepts any leachate and groundwater. Consequently, the landfill is largely considered to be hydraulically isolated. The inward groundwater flow may not, however, prevent some outward diffusive transport, as contaminants move from an area of higher concentration to a lower one i.e. from the leachate to the aquifer. This process does not appear to be having a significant impact.

This model is further confirmed by the surrounding groundwater quality which shows little obvious impact from the landfill.

The quality of surface water within the vicinity of the landfill appears to be variable but generally good and is governed by inputs from the surface water treatment lagoons to the west and run-off from the north.


Along the southern flank of the landfill, leachate breakout is known to have previously occurred, but this situation is now being actively managed and controlled by CCC.

9.2 Decommissioning and Surrender

Ahead of the development of the site for the disposal of waste, CCC leased the land from a Mr D Davies as part of a 50-year lease, starting in 1983. Since this time, CWM has purchased the land and is now the landlord. Geotechnology understands that the long-term plan of CCC was to start the process of handing the land lease back to CWM once the materials being stored on the surface have been removed and any remedial works completed. Now that this work has been undertaken Geotechnology suggests that this next stage should be initiated.

During the next phase of site management, Geotechnology understands that CCC will continue to monitor the site and treat leachate and that CWM will continue to be responsible for landfill gas collection and management. Monitoring will continue to be coordinated by CCC until there is no risk to the environment. At that point, a Permit Surrender application will be submitted to NRW bringing together the lines of evidence that demonstrate the site no longer poses a risk to the environment and the infrastructure can be decommissioned. During this period, regular consideration should be given to the performance and suitability of the leachate treatment plant.

Figure 1 Site Location Plan

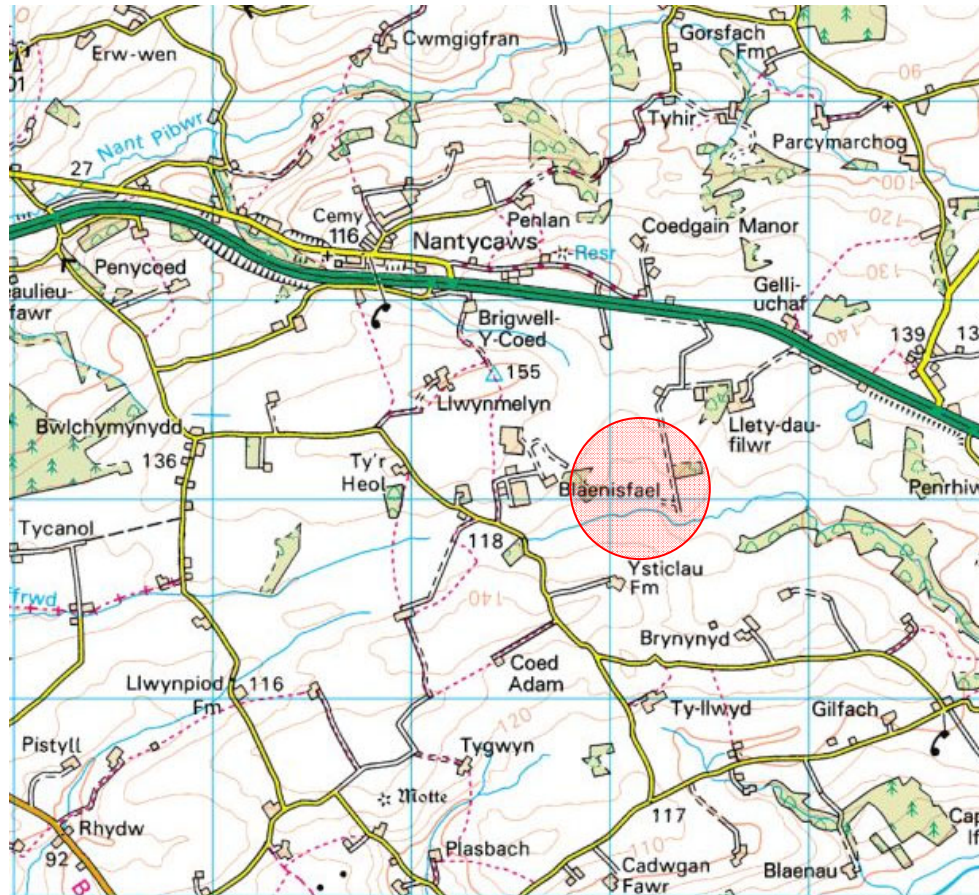

Reproduced from the Ordnance Survey Land Ranger Map
with the permission of The Controller of Her Majesty's Stationery Office
© Crown Copyright. Geotechnology SA10 8HE Licence No AL50598A

Figure 2 Available Monitoring Network


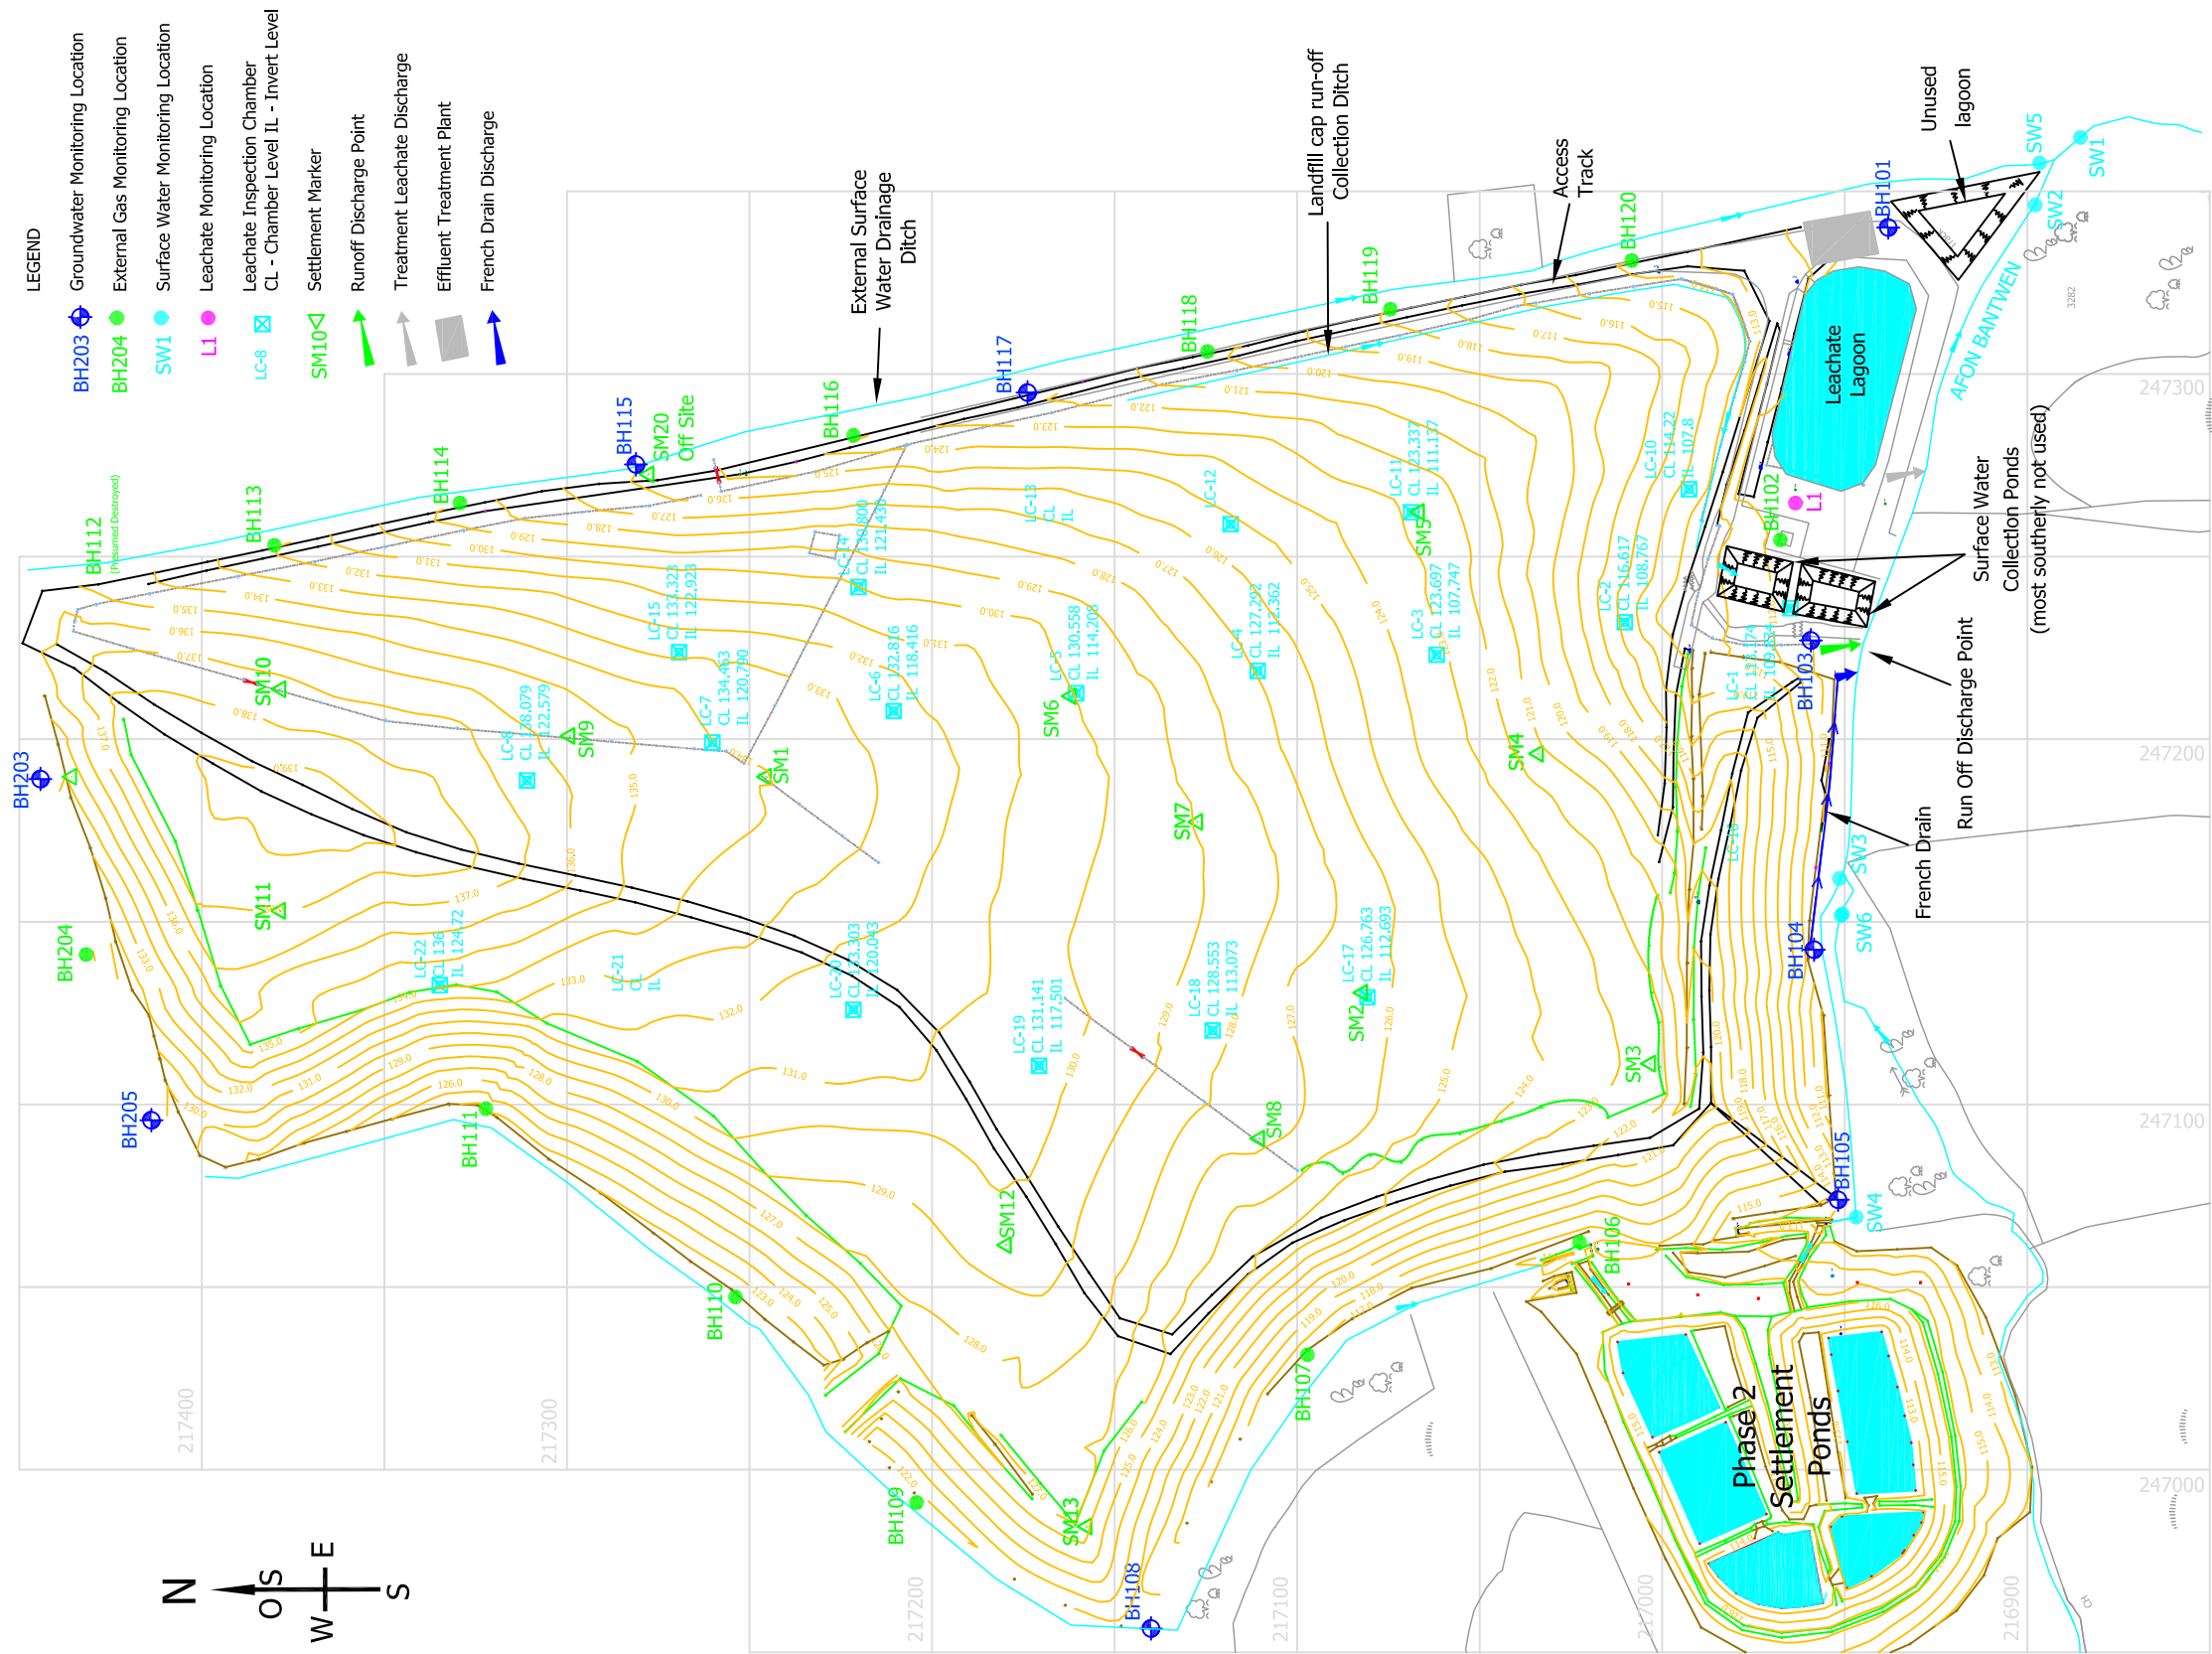


Figure 3 Conceptual Site Model

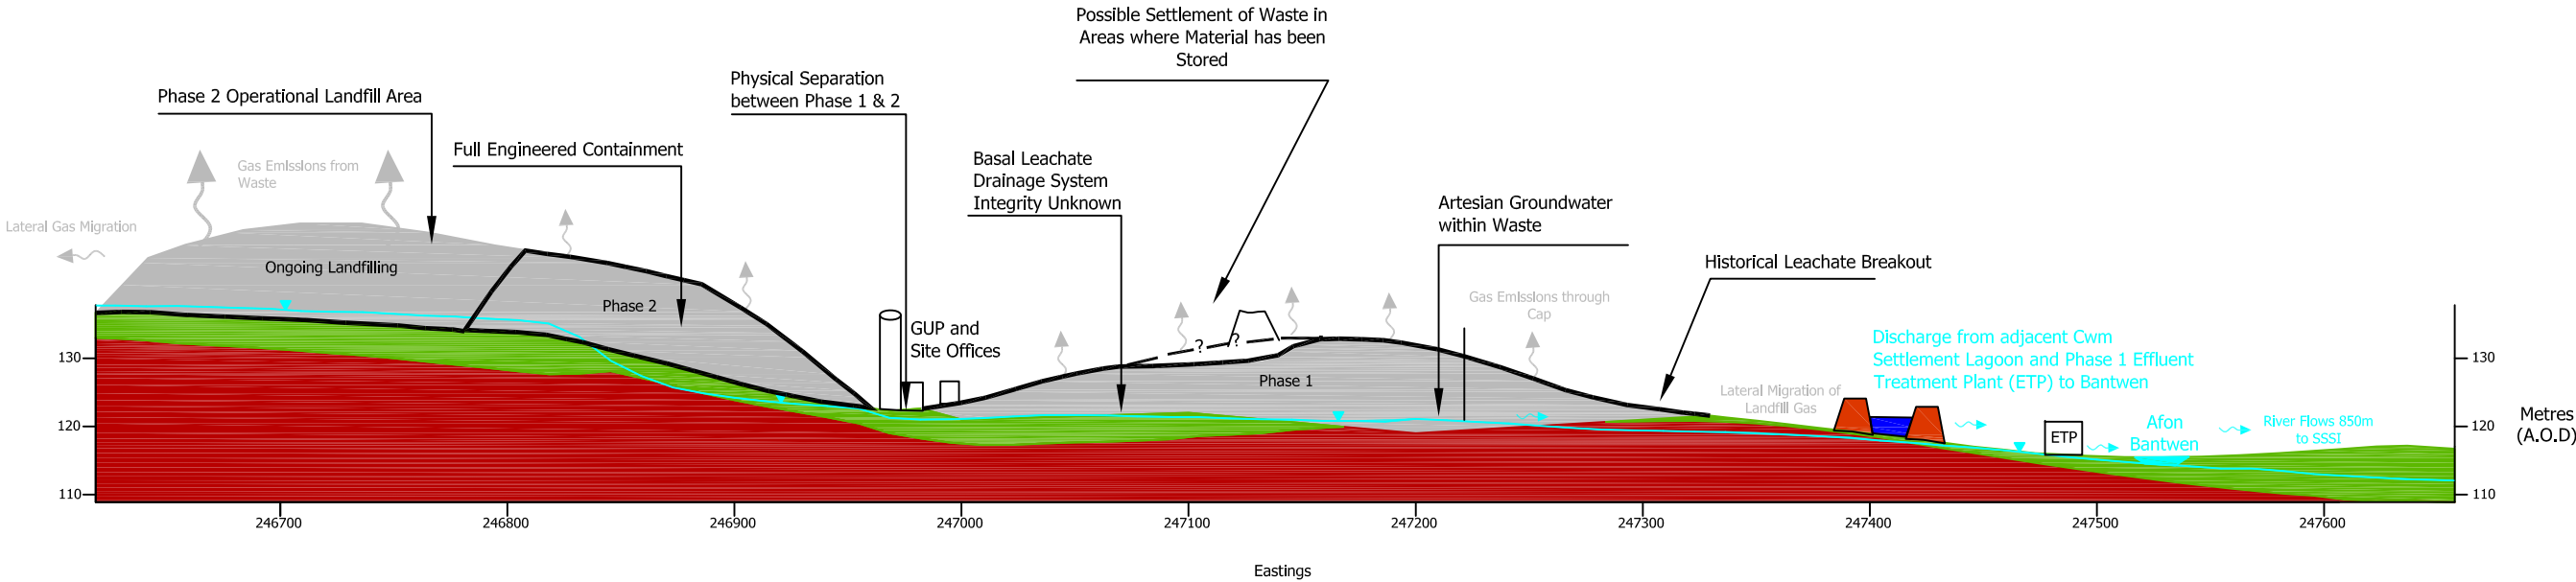

- Legend
- Waste
 - Glacial Drift
 - Devonian Bedrock
 - Potential Landfill Gas Emission
 - Potential Seepage to Controlled Water
 - GUP Gas Utilisation Plant
 - ETP Effluent Treatment Plant

Note:
Landfill gas can give rise to odour and migrate laterally

**NANT Y CAWS
PHASE 1
CLOSED LANDFILL**

**ENVIRONMENTAL
PERMIT 34183**

**2020 Annual
Environmental
Monitoring Report**

**Appendix 1
Laboratory Certificates**

Report Number 2119r1v1d0121



Geotechnology
5 Cefn-yr-Allt
Aberdulais
Neath
West Glamorgan
SA10 8HE

Attention: Ben Rees

Unit 7-8 Hawarden Business Park
Manor Road (off Manor Lane)
Hawarden
Deeside
CH5 3US
Tel: (01244) 528700
Fax: (01244) 528701
email: hawardencustomerservices@alsglobal.com
Website: www.alsenvironmental.co.uk

CERTIFICATE OF ANALYSIS

Date of report Generation:	03 April 2020
Customer:	Geotechnology
Sample Delivery Group (SDG):	200401-8
Your Reference:	
Location:	Carmarthen
Report No:	548453

We received 7 samples on Wednesday April 01, 2020 and 7 of these samples were scheduled for analysis which was completed on Friday April 03, 2020. Accredited laboratory tests are defined within the report, but opinions, interpretations and on-site data expressed herein are outside the scope of ISO 17025 accreditation.

Should this report require incorporation into client reports, it must be used in its entirety and not simply with the data sections alone.

Chemical testing (unless subcontracted) performed at ALS Life Sciences Ltd Hawarden (Method codes TM) or ALS Life Sciences Ltd Aberdeen (Method codes S).

All sample data is provided by the customer. The reported results relate to the sample supplied, and on the basis that this data is correct.

Incorrect sampling dates and/or sample information will affect the validity of results.

The customer is not permitted to reproduce this report except in full without the approval of the laboratory.

Approved By:

Sonia McWhan

Operations Manager





CERTIFICATE OF ANALYSIS

Validated

SDG:	200401-8	Client Reference:		Report Number:	548453
Location:	Carmarthen	Order Number:	1353/1760	Superseded Report:	

Received Sample Overview

Lab Sample No(s)	Customer Sample Ref.	AGS Ref.	Depth (m)	Sampled Date
21983928	BH101			31/03/2020
21983927	BH103			31/03/2020
21983926	BH104			31/03/2020
21983925	BH105			31/03/2020
21983931	BH117			31/03/2020
21983929	SW1NYC			31/03/2020
21983930	SW4NYC			31/03/2020

Maximum Sample/Coolbox Temperature (°C) :

8.2

ISO5667-3 Water quality - Sampling - Part3 -

During Transportation samples shall be stored in a cooling device capable of maintaining a temperature of (5±3)°C.

ALS have data which show that a cool box with 4 frozen icepacks is capable of maintaining pre-chilled samples at a temperature of (5±3)°C for a period of up to 24hrs.

Only received samples which have had analysis scheduled will be shown on the following pages.



CERTIFICATE OF ANALYSIS

Validated

SDG: 200401-8 Client Reference: Report Number: 548453
Location: Carmarthen Order Number: 1353/1760 Superseded Report:

Results Legend

X Test
N No Determination Possible

Sample Types -

S - Soil/Solid
UNS - Unspecified Solid
GW - Ground Water
SW - Surface Water
LE - Land Leachate
PL - Prepared Leachate
PR - Process Water
SA - Saline Water
TE - Trade Effluent
TS - Treated Sewage
US - Untreated Sewage
RE - Recreational Water
DW - Drinking Water Non-regulatory
UNL - Unspecified Liquid
SL - Sludge
G - Gas
OTH - Other

Lab Sample No(s)			21983928	21983927	21983926	21983925	21983931	21983929	21983930
Customer Sample Reference			BH101	BH103	BH104	BH105	BH117	SW11NYC	SW41NYC
AGS Reference									
Depth (m)									
Container			500ml Plastic (ALE208)	500ml Plastic (ALE208)	500ml Plastic (ALE208)	500ml Plastic (ALE208)	500ml Plastic (ALE208)	500ml Plastic (ALE208)	500ml Plastic (ALE208)
Sample Type			GW	GW	GW	GW	GW	SW	SW
Alkalinity as CaCO ₃	All	NDPs: 0 Tests: 7	X	X	X	X	X	X	X
Ammoniacal Nitrogen	All	NDPs: 0 Tests: 7		X	X	X	X	X	X
Anions by Kone (w)	All	NDPs: 0 Tests: 7	X	X	X	X	X	X	X
Conductivity (at 20 deg.C)	All	NDPs: 0 Tests: 7	X	X	X	X	X	X	X
Dissolved Metals by ICP-MS	All	NDPs: 0 Tests: 7	X	X	X	X	X	X	X
pH Value	All	NDPs: 0 Tests: 7	X	X	X	X	X	X	X
Suspended Solids	All	NDPs: 0 Tests: 2						X	X

Validated



CERTIFICATE OF ANALYSIS

Validated

SDG:	200401-8	Client Reference:		Report Number:	548453
Location:	Carmarthen	Order Number:	1353/1760	Superseded Report:	

Table of Results - Appendix

Method No	Reference	Description
TM022	Method 2540D, AWWA/APHA, 20th Ed., 1999 / BS 2690: Part120 1981;BS EN 872	Determination of total suspended solids in waters
TM043	Method 2320B, AWWA/APHA, 20th Ed., 1999 / BS 2690: Part109 1984	Determination of alkalinity in aqueous samples
TM099	BS 2690: Part 7:1968 / BS 6068: Part2.11:1984	Determination of Ammonium in Water Samples using the Kone Analyser
TM120	Method 2510B, AWWA/APHA, 20th Ed., 1999 / BS 2690: Part 9:1970	Determination of Electrical Conductivity using a Conductivity Meter
TM152	Method 3125B, AWWA/APHA, 20th Ed., 1999	Analysis of Aqueous Samples by ICP-MS
TM184	EPA Methods 325.1 & 325.2,	The Determination of Anions in Aqueous Matrices using the Kone Spectrophotometric Analysers
TM256	The measurement of Electrical Conductivity and the Laboratory determination of pH Value of Natural, Treated and Wastewaters. HMSO, 1978. ISBN 011 751428 4.	Determination of pH in Water and Leachate using the GLpH pH Meter

NA = not applicable.

Chemical testing (unless subcontracted) performed at ALS Life Sciences Ltd Hawarden (Method codes TM) or ALS Life Sciences Ltd Aberdeen (Method codes S).



CERTIFICATE OF ANALYSIS

SDG: 200401-8
Location: CarmarthenClient Reference:
Order Number: 1353/1760Report Number: 548453
Superseded Report:

Test Completion Dates

Lab Sample No(s)	21983928	21983927	21983926	21983925	21983931	21983929	21983930
Customer Sample Ref.	BH101	BH103	BH104	BH105	BH117	SW1NYC	SW4NYC
AGS Ref.							
Depth							
Type	Ground Water	Ground Water	Ground Water	Ground Water	Ground Water	Surface Water	Surface Water
Alkalinity as CaCO ₃	01-Apr-2020	01-Apr-2020	03-Apr-2020	03-Apr-2020	01-Apr-2020	01-Apr-2020	01-Apr-2020
Ammoniacal Nitrogen	03-Apr-2020	03-Apr-2020	03-Apr-2020	03-Apr-2020	03-Apr-2020	03-Apr-2020	03-Apr-2020
Anions by Kone (w)	03-Apr-2020	03-Apr-2020	03-Apr-2020	03-Apr-2020	03-Apr-2020	03-Apr-2020	03-Apr-2020
Conductivity (at 20 deg.C)	01-Apr-2020	01-Apr-2020	01-Apr-2020	01-Apr-2020	01-Apr-2020	01-Apr-2020	01-Apr-2020
Dissolved Metals by ICP-MS	02-Apr-2020	02-Apr-2020	02-Apr-2020	02-Apr-2020	02-Apr-2020	02-Apr-2020	02-Apr-2020
pH Value	02-Apr-2020	02-Apr-2020	02-Apr-2020	02-Apr-2020	02-Apr-2020	02-Apr-2020	02-Apr-2020
Suspended Solids						02-Apr-2020	02-Apr-2020



CERTIFICATE OF ANALYSIS

SDG:	200401-8	Client Reference:		Report Number:	548453
Location:	Carmarthen	Order Number:	1353/1760	Superseded Report:	

Appendix

1. Results are expressed on a dry weight basis (dried at 35°C) for all soil analyses except for the following: NRA and CEN Leach tests, flash point LOI, pH, ammonium as NH₄ by the BRE method, VOC TICs and SVOC TICs.

2. If sufficient sample is received a sub sample will be retained free of charge for 30 days after analysis is completed (e-mailed) for all sample types unless the sample is destroyed on testing. The prepared soil sub sample that is analysed for asbestos will be retained for a period of 6 months after the analysis date. All bulk samples will be retained for a period of 6 months after the analysis date. All samples received and not scheduled will be disposed of one month after the date of receipt unless we are instructed to the contrary. Once the initial period has expired, a storage charge will be applied for each month or part thereof until the client cancels the request for sample storage. ALS reserve the right to charge for samples received and stored but not analysed.

3. With respect to turnaround, we will always endeavour to meet client requirements wherever possible, but turnaround times cannot be absolutely guaranteed due to so many variables beyond our control.

4. We take responsibility for any test performed by sub-contractors (marked with an asterisk). We endeavour to use UKAS/MCERTS Accredited Laboratories, who either complete a quality questionnaire or are audited by ourselves. For some determinands there are no UKAS/MCERTS Accredited Laboratories, in this instance a laboratory with a known track record will be utilised.

5. If no separate volatile sample is supplied by the client, or if a headspace or sediment is present in the volatile sample, the integrity of the data may be compromised. This will be flagged up as an invalid VOC on the test schedule and the result marked as deviating on the test certificate.

6. NDP - No determination possible due to insufficient/unsuitable sample.

7. Results relate only to the items tested.

8. LoDs (Limit of Detection) for wet tests reported on a dry weight basis are not corrected for moisture content.

9. **Surrogate recoveries** - Surrogates are added to your sample to monitor recovery of the test requested. A % recovery is reported, results are not corrected for the recovery measured. Typical recoveries for organics tests are 70-130%. Recoveries in soils are affected by organic rich or clay rich matrices. Waters can be affected by remediation fluids or high amounts of sediment. Test results are only ever reported if all of the associated quality checks pass; it is assumed that all recoveries outside of the values above are due to matrix affect.

10. Stones/debris are not routinely removed. We always endeavour to take a representative sub sample from the received sample.

11. In certain circumstances the method detection limit may be elevated due to the sample being outside the calibration range. Other factors that may contribute to this include possible interferences. In both cases the sample would be diluted which would cause the method detection limit to be raised.

12. Mercury results quoted on soils will not include volatile mercury as the analysis is performed on a dried and crushed sample.

13. For leachate preparations other than Zero Headspace Extraction (ZHE) volatile loss may occur.

14. For the BSEN 12457-3 two batch process to allow the cumulative release to be calculated, the volume of the leachate produced is measured and filtered for all tests. We therefore cannot carry out any unfiltered analysis. The tests affected include volatiles GCFID/GCMS and all subcontracted analysis.

15. Analysis and identification of specific compounds using GCFID is by retention time only, and we routinely calibrate and quantify for benzene, toluene, ethylbenzenes and xylenes (BTEX). For total volatiles in the C5-C12 range, the total area of the chromatogram is integrated and expressed as ug/kg or ug/l. Although this analysis is commonly used for the quantification of gasoline range organics (GRO), the system will also detect other compounds such as chlorinated solvents, and this may lead to a falsely high result with respect to hydrocarbons only. It is not possible to specifically identify these non-hydrocarbons, as standards are not routinely run for any other compounds, and for more definitive identification, volatiles by GCMS should be utilised.

16. We are accredited to MCERTS for sand, clay and loam/topsoil, or any of these materials - whether these are derived from naturally occurring soil profiles, or from fill/made ground, as long as these materials constitute the major part of the sample. Other coarse granular material such as concrete, gravel and brick are not accredited if they comprise the major part of the sample.

General

17. **Tentatively Identified Compounds (TICs)** are non-target peaks in VOC and SVOC analysis. All non-target peaks detected with a concentration above the LoD are subjected to a mass spectral library search. Non-target peaks with a library search confidence of >75% are reported based on the best mass spectral library match. When a non-target peak with a library search confidence of <75% is detected it is reported as "mixed hydrocarbons". Non-target compounds identified from the scan data are semi-quantified relative to one of the deuterated internal standards, under the same chromatographic conditions as the target compounds. This result is reported as a semi-quantitative value and reported as Tentatively Identified Compounds (TICs). TICs are outside the scope of UKAS accreditation and are not moisture corrected.

18. Sample Deviations

If a sample is classed as deviated then the associated results may be compromised.

1	Container with Headspace provided for volatiles analysis
2	Incorrect container received
3	Deviation from method
§	Sampled on date not provided
◆	Sample holding time exceeded in laboratory
@	Sample holding time exceeded due to late arrival of instructions or samples

19. Asbestos

When requested, the individual sub sample scheduled will be analysed in house for the presence of asbestos fibres and asbestos containing material by our documented in house method TM048 based on HSG 248 (2005), which is accredited to ISO17025. If a specific asbestos fibre type is not found this will be reported as "Not detected". If no asbestos fibre types are found all will be reported as "Not detected" and the sub sample analysed deemed to be clear of asbestos. If an asbestos fibre type is found it will be reported as detected (for each fibre type found). Testing can be carried out on asbestos positive samples, but, due to Health and Safety considerations, may be replaced by alternative tests or reported as No Determination Possible (NDP). The quantity of

Identification of Asbestos in Bulk Materials & Soils

The results for identification of asbestos in bulk materials are obtained from supplied bulk materials which have been examined to determine the presence of asbestos fibres using ALS (Hawarden) in-house method of transmitted/polarised light microscopy and central stop dispersion staining, based on HSG 248 (2005).

The results for identification of asbestos in soils are obtained from a homogenised sub sample which has been examined to determine the presence of asbestos fibres using ALS (Hawarden) in-house method of transmitted/polarised light microscopy and central stop dispersion staining, based on HSG 248 (2005).

Asbestos Type	Common Name
Chrysotile	White Asbestos
Amosite	Brown Asbestos
Crocidolite	Blue Asbestos
Fibrous Actinolite	-
Fibrous Anthophyllite	-
Fibrous Tremolite	-

Visual Estimation Of Fibre Content

Estimation of fibre content is not permitted as part of our UKAS accredited test other than: - Trace - Where only one or two asbestos fibres were identified.

Respirable Fibres

Respirable fibres are defined as fibres of <3 µm diameter, longer than 5 µm and with aspect ratios of at least 3:1 that can be inhaled into the lower regions of the lung and are generally acknowledged to be most important predictor of hazard and risk for cancers of the lung.

Standing Committee of Analysts, *The Quantification of Asbestos in Soil* (2107).

Further guidance on typical asbestos fibre content of manufactured products can be found in HSG 264.

The identification of asbestos containing materials and soils falls within our schedule of tests for which we hold UKAS accreditation, however opinions, interpretations and all other information contained in the report are outside the scope of UKAS accreditation.



Unit 7-8 Hawarden Business Park

Manor Road (off Manor Lane)

Hawarden

Deeside

CH5 3US

Tel: (01244) 528700

Fax: (01244) 528701

email: hawardencustomerservices@alsglobal.com

Website: www.alsenvironmental.co.uk

Geotechnology
5 Cefn-yr-Allt
Aberdulais
Neath
West Glamorgan
SA10 8HE

Attention: Ben Rees

CERTIFICATE OF ANALYSIS

Date of report Generation: 12 June 2020
Customer: Geotechnology
Sample Delivery Group (SDG): 200603-40
Your Reference:
Location: Carmarthen
Report No: 555161

This report has been revised and directly supersedes 554773 in its entirety.

We received 7 samples on Wednesday June 03, 2020 and 7 of these samples were scheduled for analysis which was completed on Friday June 12, 2020. Accredited laboratory tests are defined within the report, but opinions, interpretations and on-site data expressed herein are outside the scope of ISO 17025 accreditation.

Should this report require incorporation into client reports, it must be used in its entirety and not simply with the data sections alone.

Chemical testing (unless subcontracted) performed at ALS Life Sciences Ltd Hawarden (Method codes TM) or ALS Life Sciences Ltd Aberdeen (Method codes S).

All sample data is provided by the customer. The reported results relate to the sample supplied, and on the basis that this data is correct.

Incorrect sampling dates and/or sample information will affect the validity of results.

The customer is not permitted to reproduce this report except in full without the approval of the laboratory.

Approved By:

Sonia McWhan

Operations Manager





CERTIFICATE OF ANALYSIS

Validated

SDG: 200603-40
Location: Carmarthen

Client Reference:
Order Number:

Report Number: 555161
Superseded Report: 554773

Received Sample Overview

Lab Sample No(s)	Customer Sample Ref.	AGS Ref.	Depth (m)	Sampled Date
22242864	BH101			02/06/2020
22242865	BH103			02/06/2020
22242866	BH104			02/06/2020
22242868	BH105			02/06/2020
22242869	BH117			02/06/2020
22242870	SW1NYC			02/06/2020
22242871	SW4NYC			02/06/2020

Maximum Sample/Coolbox Temperature (°C) :

16.6

ISO5667-3 Water quality - Sampling - Part3 -

During Transportation samples shall be stored in a cooling device capable of maintaining a temperature of (5±3)°C.

ALS have data which show that a cool box with 4 frozen icepacks is capable of maintaining pre-chilled samples at a temperature of (5±3)°C for a period of up to 24hrs.

Only received samples which have had analysis scheduled will be shown on the following pages.



CERTIFICATE OF ANALYSIS

Validated

SDG: 200603-40
Location: Carmarthen

Client Reference:
Order Number:

Report Number: 555161
Superseded Report: 554773

Results Legend

- X** Test
N No Determination Possible

Sample Types -

S - Soil/Solid
UNS - Unspecified Solid
GW - Ground Water
SW - Surface Water
LE - Land Leachate
PL - Prepared Leachate
PR - Process Water
SA - Saline Water
TE - Trade Effluent
TS - Treated Sewage
US - Untreated Sewage
RE - Recreational Water
DW - Drinking Water Non-regulatory
UNL - Unspecified Liquid
SL - Sludge
G - Gas
OTH - Other

Results Legend	Lab Sample No(s)		Customer Sample Reference		AGS Reference		Depth (m)		Container		Sample Type	
	22242864	BH101							250ml Amber Gl. PTFE/PE (ALE219)	GW		
	22242865	BH103							0.5l glass bottle (ALE227)	GW		
	22242866	BH104							500ml Plastic (ALE208)	GW		
	22242868	BH105							250ml Amber Gl. PTFE/PE (ALE219)	GW		
	22242869	BH117							0.5l glass bottle (ALE227)	GW		
Acid Herbicides by GCMS	All	NDPs: 0 Tests: 5										
Alkalinity as CaCO ₃	All	NDPs: 0 Tests: 7										
Ammoniacal Nitrogen	All	NDPs: 0 Tests: 7										
Anions by Kone (w)	All	NDPs: 0 Tests: 7										
Conductivity (at 20 deg.C)	All	NDPs: 0 Tests: 7										
Dissolved Metals by ICP-MS	All	NDPs: 0 Tests: 7										
Mercury Dissolved	All	NDPs: 0 Tests: 5										
PAH Spec MS - Aqueous (W)	All	NDPs: 0 Tests: 5										
pH Value	All	NDPs: 0 Tests: 7										
Phosphate by Kone (w)	All	NDPs: 0 Tests: 5										
Suspended Solids	All	NDPs: 0 Tests: 2										
Total Metals by ICP-MS	All	NDPs: 0 Tests: 5										

[illegible]



CERTIFICATE OF ANALYSIS

Validated

SDG: 200603-40
Location: Carmarthen

Client Reference:
Order Number:

Report Number: 555161
Superseded Report: 554773

Results Legend			Customer Sample Ref.		BH101	BH103	BH104	BH105	BH117	SW1NYC
#	ISO17025 accredited.		Depth (m) Sample Type Date Sampled Sample Time Date Received SDG Ref Lab Sample No.(s) AGS Reference		Ground Water (GW)	Ground Water (GW)	Ground Water (GW)	Ground Water (GW)	Ground Water (GW)	Surface Water (SW)
M	mCERTS accredited.				02/06/2020	02/06/2020	02/06/2020	02/06/2020	02/06/2020	02/06/2020
aq	Aqueous / settled sample.				03/06/2020	03/06/2020	03/06/2020	03/06/2020	03/06/2020	03/06/2020
diss.filt	Dissolved / filtered sample.				200603-40	200603-40	200603-40	200603-40	200603-40	200603-40
tot.unfilt	Total / unfiltered sample.				22242864	22242865	22242866	22242868	22242869	22242870
+	Subcontracted - refer to subcontractor report for accreditation status.									
**	% recovery of the surrogate standard to check the efficiency of the method. The results of individual compounds within samples aren't corrected for the recovery									
(F)	Trigger breach confirmed									
1-3+5@	Sample deviation (see appendix)									
Component	LOD/Units	Method								
Suspended solids, Total	<2 mg/l	TM022								4.85
										#
Alkalinity, Total as CaCO3	<2 mg/l	TM043	220	205	288	324	337	174		
			#	#	#	#	#	#		#
Ammoniacal Nitrogen as N	<0.2 mg/l	TM099	<0.2	<0.2	<0.2	<0.2	<0.2	<0.2		
			#	#	#	#	#	#		#
Conductivity @ 20 deg.C	<0.005 mS/cm	TM120	0.419	0.391	0.493	0.447	0.526	0.58		
			#	#	#	#	#	#		#
Arsenic (diss.filt)	<0.5 µg/l	TM152	<0.5	<0.5	0.86	<0.5	0.553			
			#	#	2 #	#	2 #			
Barium (diss.filt)	<0.2 µg/l	TM152	119	57.7	18.3	57.5	56			
			#	#	2 #	#	2 #			
Beryllium (diss.filt)	<0.1 µg/l	TM152	<0.1	<0.1	<0.1	<0.1	<0.1			
			#	#	2 #	#	2 #			
Boron (diss.filt)	<10 µg/l	TM152	<10	<10	<10	<10	<10			
			#	#	2 #	#	2 #			
Cadmium (diss.filt)	<0.08 µg/l	TM152	<0.08	<0.08	<0.08	<0.08	<0.08			
			#	#	2 #	#	2 #			
Chromium (diss.filt)	<1 µg/l	TM152	<1	<1	<1	<1	<1			
			#	#	2 #	#	2 #			
Copper (diss.filt)	<0.3 µg/l	TM152	<0.3	<0.3	1.07	0.313	<0.3			
			#	#	2 #	#	2 #			
Lead (diss.filt)	<0.2 µg/l	TM152	<0.2	<0.2	<0.2	<0.2	<0.2			
			#	#	2 #	#	2 #			
Manganese (diss.filt)	<3 µg/l	TM152	<3	<3	326	26	<3			
			#	#	2 #	#	2 #			
Nickel (diss.filt)	<0.4 µg/l	TM152	<0.4	<0.4	0.711	<0.4	<0.4			
			#	#	2 #	#	2 #			
Phosphorus (diss.filt)	<10 µg/l	TM152	<10	28.8	<10	28	11.9			
			#	#	2 #	#	2 #			
Zinc (diss.filt)	<1 µg/l	TM152	1.03	4.66	<1	3	<1			
			#	#	2 #	#	2 #			
Sodium (Dis.Filt)	<0.076 mg/l	TM152	17.1	16.1	13.2	13.8	15.1			
			#	#	2 #	#	2 #			
Magnesium (Dis.Filt)	<0.036 mg/l	TM152	14.9	9.94	12.6	12.2	9.51			
			#	#	2 #	#	2 #			
Potassium (Dis.Filt)	<0.2 mg/l	TM152	1.21	1.18	1.17	1.23	1.03	19.1		
			#	#	2 #	#	2 #	#		
Calcium (Dis.Filt)	<0.2 mg/l	TM152	81	83.2	112	105	117			
			#	#	2 #	#	2 #			
Iron (Dis.Filt)	<0.019 mg/l	TM152	<0.019	<0.019	0.0261	<0.019	<0.019			
			#	#	2 #	#	2 #			
Hardness, Total as CaCO3 unfiltered	<0.35 mg/l	TM152	268	248	361	313	385			
			2	2	2	2	2			
Mercury (diss.filt)	<0.01 µg/l	TM183	<0.01	<0.01	<0.01	<0.01	<0.01			
			#	#	2 #	#	2 #			
Sulphate	<2 mg/l	TM184	9.1	7.1	13.7	6.2	16.9			
			#	#	#	#	#			
Chloride	<2 mg/l	TM184	14.9	14.2	11.9	10	24.5	55.6		
			#	#	#	#	#	#		
Phosphate (Ortho as P)	<0.02 mg/l	TM184	<0.02	<0.02	<0.02	<0.02	<0.02			
			#	#	#	#	#			
pH	<1 pH Units	TM256	7.74	7.59	7.42	7.19	7.43	8.09		
			#	#	#	#	#	#		
Mecoprop	<0.04 µg/l	TM411	<0.04	<0.04	<0.04	<0.04	<0.04			



CERTIFICATE OF ANALYSIS

Validated

SDG: 200603-40
Location: Carmarthen**Client Reference:**
Order Number:**Report Number:** 555161
Superseded Report: 554773

Table of Results - Appendix

Method No	Reference	Description
TM022	Method 2540D, AWWA/APHA, 20th Ed., 1999 / BS 2690: Part120 1981;BS EN 872	Determination of total suspended solids in waters
TM043	Method 2320B, AWWA/APHA, 20th Ed., 1999 / BS 2690: Part109 1984	Determination of alkalinity in aqueous samples
TM099	BS 2690: Part 7:1968 / BS 6068: Part2.11:1984	Determination of Ammonium in Water Samples using the Kone Analyser
TM120	Method 2510B, AWWA/APHA, 20th Ed., 1999 / BS 2690: Part 9:1970	Determination of Electrical Conductivity using a Conductivity Meter
TM152	Method 3125B, AWWA/APHA, 20th Ed., 1999	Analysis of Aqueous Samples by ICP-MS
TM178	Modified: US EPA Method 8100	Determination of Polynuclear Aromatic Hydrocarbons (PAH) by GC-MS in Waters
TM183	BS EN 23506:2002, (BS 6068-2.74:2002) ISBN 0 580 38924 3	Determination of Trace Level Mercury in Waters and Leachates by PSA Cold Vapour Atomic Fluorescence Spectrometry
TM184	EPA Methods 325.1 & 325.2,	The Determination of Anions in Aqueous Matrices using the Kone Spectrophotometric Analysers
TM256	The measurement of Electrical Conductivity and the Laboratory determination of pH Value of Natural, Treated and Wastewaters. HMSO, 1978. ISBN 011 751428 4.	Determination of pH in Water and Leachate using the GLpH pH Meter
TM411	Acid_Herbs_GCMS	Acid Herbs in Water by GCMS

NA = not applicable.

Chemical testing (unless subcontracted) performed at ALS Life Sciences Ltd Hawarden (Method codes TM) or ALS Life Sciences Ltd Aberdeen (Method codes S).



CERTIFICATE OF ANALYSIS

Validated

SDG: 200603-40
Location: Carmarthen

Client Reference:
Order Number:

Report Number: 555161
Superseded Report: 554773

Test Completion Dates

Lab Sample No(s)	22242864	22242865	22242866	22242868	22242869	22242870	22242871
Customer Sample Ref.	BH101	BH103	BH104	BH105	BH117	SW1NYC	SW4NYC
AGS Ref.							
Depth							
Type	Ground Water	Ground Water	Ground Water	Ground Water	Ground Water	Surface Water	Surface Water
Acid Herbicides by GCMS	12-Jun-2020	12-Jun-2020	12-Jun-2020	12-Jun-2020	12-Jun-2020		
Alkalinity as CaCO3	09-Jun-2020	09-Jun-2020	09-Jun-2020	08-Jun-2020	08-Jun-2020	09-Jun-2020	09-Jun-2020
Ammoniacal Nitrogen	05-Jun-2020	05-Jun-2020	05-Jun-2020	05-Jun-2020	05-Jun-2020	05-Jun-2020	05-Jun-2020
Anions by Kone (w)	05-Jun-2020	05-Jun-2020	08-Jun-2020	08-Jun-2020	05-Jun-2020	05-Jun-2020	05-Jun-2020
Conductivity (at 20 deg.C)	04-Jun-2020	04-Jun-2020	04-Jun-2020	04-Jun-2020	04-Jun-2020	04-Jun-2020	04-Jun-2020
Dissolved Metals by ICP-MS	09-Jun-2020	09-Jun-2020	09-Jun-2020	09-Jun-2020	09-Jun-2020	09-Jun-2020	09-Jun-2020
Mercury Dissolved	04-Jun-2020	04-Jun-2020	04-Jun-2020	04-Jun-2020	04-Jun-2020		
PAH Spec MS - Aqueous (W)	10-Jun-2020	10-Jun-2020	10-Jun-2020	10-Jun-2020	10-Jun-2020		
pH Value	08-Jun-2020	08-Jun-2020	08-Jun-2020	08-Jun-2020	08-Jun-2020	08-Jun-2020	08-Jun-2020
Phosphate by Kone (w)	05-Jun-2020	05-Jun-2020	05-Jun-2020	05-Jun-2020	05-Jun-2020		
Suspended Solids						05-Jun-2020	06-Jun-2020
Total Metals by ICP-MS	08-Jun-2020	09-Jun-2020	08-Jun-2020	08-Jun-2020	08-Jun-2020		



CERTIFICATE OF ANALYSIS

SDG:	200603-40	Client Reference:	Report Number:	555161
Location:	Carmarthen	Order Number:	Superseded Report:	554773

Appendix

1. Results are expressed on a dry weight basis (dried at 35°C) for all soil analyses except for the following: NRA and CEN Leach tests, flash point LOI, pH, ammonium as NH₄ by the BRE method, VOC TICs and SVOC TICs.

2. If sufficient sample is received a sub sample will be retained free of charge for 30 days after analysis is completed (e-mailed) for all sample types unless the sample is destroyed on testing. The prepared soil sub sample that is analysed for asbestos will be retained for a period of 6 months after the analysis date. All bulk samples will be retained for a period of 6 months after the analysis date. All samples received and not scheduled will be disposed of one month after the date of receipt unless we are instructed to the contrary. Once the initial period has expired, a storage charge will be applied for each month or part thereof until the client cancels the request for sample storage. ALS reserve the right to charge for samples received and stored but not analysed.

3. With respect to turnaround, we will always endeavour to meet client requirements wherever possible, but turnaround times cannot be absolutely guaranteed due to so many variables beyond our control.

4. We take responsibility for any test performed by sub-contractors (marked with an asterisk). We endeavour to use UKAS/MCERTS Accredited Laboratories, who either complete a quality questionnaire or are audited by ourselves. For some determinands there are no UKAS/MCERTS Accredited Laboratories, in this instance a laboratory with a known track record will be utilised.

5. If no separate volatile sample is supplied by the client, or if a headspace or sediment is present in the volatile sample, the integrity of the data may be compromised. This will be flagged up as an invalid VOC on the test schedule and the result marked as deviating on the test certificate.

6. NDP - No determination possible due to insufficient/unsuitable sample.

7. Results relate only to the items tested.

8. LoDs (Limit of Detection) for wet tests reported on a dry weight basis are not corrected for moisture content.

9. **Surrogate recoveries** - Surrogates are added to your sample to monitor recovery of the test requested. A % recovery is reported, results are not corrected for the recovery measured. Typical recoveries for organics tests are 70-130%. Recoveries in soils are affected by organic rich or clay rich matrices. Waters can be affected by remediation fluids or high amounts of sediment. Test results are only ever reported if all of the associated quality checks pass; it is assumed that all recoveries outside of the values above are due to matrix affect.

10. Stones/debris are not routinely removed. We always endeavour to take a representative sub sample from the received sample.

11. In certain circumstances the method detection limit may be elevated due to the sample being outside the calibration range. Other factors that may contribute to this include possible interferences. In both cases the sample would be diluted which would cause the method detection limit to be raised.

12. Mercury results quoted on soils will not include volatile mercury as the analysis is performed on a dried and crushed sample.

13. For leachate preparations other than Zero Headspace Extraction (ZHE) volatile loss may occur.

14. For the BSEN 12457-3 two batch process to allow the cumulative release to be calculated, the volume of the leachate produced is measured and filtered for all tests. We therefore cannot carry out any unfiltered analysis. The tests affected include volatiles GCFID/GCMS and all subcontracted analysis.

15. Analysis and identification of specific compounds using GCFID is by retention time only, and we routinely calibrate and quantify for benzene, toluene, ethylbenzenes and xylenes (BTEX). For total volatiles in the C5-C12 range, the total area of the chromatogram is integrated and expressed as ug/kg or ug/l. Although this analysis is commonly used for the quantification of gasoline range organics (GRO), the system will also detect other compounds such as chlorinated solvents, and this may lead to a falsely high result with respect to hydrocarbons only. It is not possible to specifically identify these non-hydrocarbons, as standards are not routinely run for any other compounds, and for more definitive identification, volatiles by GCMS should be utilised.

16. We are accredited to MCERTS for sand, clay and loam/topsoil, or any of these materials - whether these are derived from naturally occurring soil profiles, or from fill/made ground, as long as these materials constitute the major part of the sample. Other coarse granular material such as concrete, gravel and brick are not accredited if they comprise the major part of the sample.

General

17. **Tentatively Identified Compounds (TICs)** are non-target peaks in VOC and SVOC analysis. All non-target peaks detected with a concentration above the LoD are subjected to a mass spectral library search. Non-target peaks with a library search confidence of >75% are reported based on the best mass spectral library match. When a non-target peak with a library search confidence of <75% is detected it is reported as "mixed hydrocarbons". Non-target compounds identified from the scan data are semi-quantified relative to one of the deuterated internal standards, under the same chromatographic conditions as the target compounds. This result is reported as a semi-quantitative value and reported as Tentatively Identified Compounds (TICs). TICs are outside the scope of UKAS accreditation and are not moisture corrected.

18. Sample Deviations

If a sample is classed as deviated then the associated results may be compromised.

1	Container with Headspace provided for volatiles analysis
2	Incorrect container received
3	Deviation from method
§	Sampled on date not provided
◆	Sample holding time exceeded in laboratory
@	Sample holding time exceeded due to late arrival of instructions or samples

19. Asbestos

When requested, the individual sub sample scheduled will be analysed in house for the presence of asbestos fibres and asbestos containing material by our documented in house method TM048 based on HSG 248 (2005), which is accredited to ISO17025. If a specific asbestos fibre type is not found this will be reported as "Not detected". If no asbestos fibre types are found all will be reported as "Not detected" and the sub sample analysed deemed to be clear of asbestos. If an asbestos fibre type is found it will be reported as detected (for each fibre type found). Testing can be carried out on asbestos positive samples, but, due to Health and Safety considerations, may be replaced by alternative tests or reported as No Determination Possible (NDP). The quantity of

Identification of Asbestos in Bulk Materials & Soils

The results for identification of asbestos in bulk materials are obtained from supplied bulk materials which have been examined to determine the presence of asbestos fibres using ALS (Hawarden) in-house method of transmitted/polarised light microscopy and central stop dispersion staining, based on HSG 248 (2005).

The results for identification of asbestos in soils are obtained from a homogenised sub sample which has been examined to determine the presence of asbestos fibres using ALS (Hawarden) in-house method of transmitted/polarised light microscopy and central stop dispersion staining, based on HSG 248 (2005).

Asbestos Type	Common Name
Chrysotile	White Asbestos
Amosite	Brown Asbestos
Crocidolite	Blue Asbestos
Fibrous Actinolite	-
Fibrous Anthophyllite	-
Fibrous Tremolite	-

Visual Estimation Of Fibre Content

Estimation of fibre content is not permitted as part of our UKAS accredited test other than: - Trace - Where only one or two asbestos fibres were identified.

Respirable Fibres

Respirable fibres are defined as fibres of <3 µm diameter, longer than 5 µm and with aspect ratios of at least 3:1 that can be inhaled into the lower regions of the lung and are generally acknowledged to be most important predictor of hazard and risk for cancers of the lung.

Standing Committee of Analysts, *The Quantification of Asbestos in Soil* (2017).

Further guidance on typical asbestos fibre content of manufactured products can be found in HSG 264.

The identification of asbestos containing materials and soils falls within our schedule of tests for which we hold UKAS accreditation, however opinions, interpretations and all other information contained in the report are outside the scope of UKAS accreditation.



Geotechnology
5 Cefn-yr-Allt
Aberdulais
Neath
West Glamorgan
SA10 8HE

Attention: Ben Rees

Unit 7-8 Hawarden Business Park
Manor Road (off Manor Lane)
Hawarden
Deeside
CH5 3US
Tel: (01244) 528700
Fax: (01244) 528701
email: hawardencustomerservices@alsglobal.com
Website: www.alsenvironmental.co.uk

CERTIFICATE OF ANALYSIS

Date of report Generation:	15 October 2020
Customer:	Geotechnology
Sample Delivery Group (SDG):	200930-12
Your Reference:	
Location:	Carmarthen
Report No:	571106

We received 12 samples on Wednesday September 30, 2020 and 12 of these samples were scheduled for analysis which was completed on Wednesday October 14, 2020. Accredited laboratory tests are defined within the report, but opinions, interpretations and on-site data expressed herein are outside the scope of ISO 17025 accreditation.

Should this report require incorporation into client reports, it must be used in its entirety and not simply with the data sections alone.

Chemical testing (unless subcontracted) performed at ALS Life Sciences Ltd Hawarden (Method codes TM) or ALS Life Sciences Ltd Aberdeen (Method codes S).

All sample data is provided by the customer. The reported results relate to the sample supplied, and on the basis that this data is correct.

Incorrect sampling dates and/or sample information will affect the validity of results.

The customer is not permitted to reproduce this report except in full without the approval of the laboratory.

Approved By:

Sonia McWhan

Operations Manager





CERTIFICATE OF ANALYSIS

Validated

SDG: 200930-12
Location: Carmarthen

Client Reference:
Order Number:

Report Number: 571106
Superseded Report:

Received Sample Overview

Lab Sample No(s)	Customer Sample Ref.	AGS Ref.	Depth (m)	Sampled Date
22923522	BH10			28/09/2020
22923532	BH101			28/09/2020
22923531	BH103			28/09/2020
22923530	BH104			28/09/2020
22923529	BH105			28/09/2020
22923523	BH117			28/09/2020
22923525	L1			28/09/2020
22923527	NYC SW1			28/09/2020
22923528	NYC SW4			28/09/2020
22923526	RUN OFF			28/09/2020
22923518	WERN SW2			28/09/2020
22923521	WERN SW4			28/09/2020

Only received samples which have had analysis scheduled will be shown on the following pages.



CERTIFICATE OF ANALYSIS

Validated

SDG: 200930-12
Location: Carmarthen

Client Reference:
Order Number:

Report Number: 571106
Superseded Report:

Results Legend

X Test
N No Determination Possible

Sample Types -

S - Soil/Solid
UNS - Unspecified Solid
GW - Ground Water
SW - Surface Water
LE - Land Leachate
PL - Prepared Leachate
PR - Process Water
SA - Saline Water
TE - Trade Effluent
TS - Treated Sewage
US - Untreated Sewage
RE - Recreational Water
DW - Drinking Water Non-regulatory
UNL - Unspecified Liquid
SL - Sludge
G - Gas
OTH - Other

Lab Sample No(s)	Customer Sample Reference	AGS Reference	Depth (m)	Container	Sample Type	22923528	22923527	22923525	22923523	22923529	22923530	22923531	22923532	22923522
						500ml Plastic (ALE208)	HNO3 Filtered (ALE204)	500ml Plastic (ALE208)	HNO3 Filtered (ALE204)	H2SO4 (ALE244)	500ml Plastic (ALE208)	H2SO4 (ALE244)	500ml Plastic (ALE208)	HNO3 Filtered (ALE204)
						SW	SW	LE	LE	LE	GW	GW	GW	GW
Acid Herbicides by GCMS	All	NDPs: 0 Tests: 2												
Alkalinity as CaCO3	All	NDPs: 0 Tests: 11												
Ammoniacal Nitrogen	All	NDPs: 0 Tests: 11												
Anions by Kone (w)	All	NDPs: 0 Tests: 11												
Conductivity (at 20 deg.C)	All	NDPs: 0 Tests: 12												
Dissolved Metals by ICP-MS	All	NDPs: 0 Tests: 11												
Mercury Dissolved	All	NDPs: 0 Tests: 2												
PAH Spec MS - Aqueous (W)	All	NDPs: 0 Tests: 2												
pH Value	All	NDPs: 0 Tests: 12												
Phosphate by Kone (w)	All	NDPs: 0 Tests: 2												
Suspended Solids	All	NDPs: 0 Tests: 5												
Total Metals by ICP-MS	All	NDPs: 0 Tests: 1												

[illegible]



CERTIFICATE OF ANALYSIS

Validated

SDG: 200930-12
Location: Carmarthen

Client Reference:
Order Number:

Report Number: 571106
Superseded Report:

Results Legend			Customer Sample Ref.		L1	NYC SW1	NYC SW4	RUN OFF	WERN SW2	WERN SW4
#	ISO17025 accredited.		Depth (m) Sample Type Date Sampled Sample Time Date Received SDG Ref Lab Sample No.(s) AGS Reference		Land Leachate (LE)	Surface Water (SW)	Surface Water (SW)	Surface Water (SW)	Surface Water (SW)	Surface Water (SW)
M	mCERTS accredited.				28/09/2020	28/09/2020	28/09/2020	28/09/2020	28/09/2020	28/09/2020
aq	Aqueous / settled sample.				13:00:00	12:30:00	11:50:00	13:10:00	09:30:00	09:40:00
diss.filt	Dissolved / filtered sample.				30/09/2020	30/09/2020	30/09/2020	30/09/2020	30/09/2020	30/09/2020
tot.unfilt	Total / unfiltered sample.				200930-12	200930-12	200930-12	200930-12	200930-12	200930-12
Subcontracted - refer to subcontractor report for accreditation status.					22923525	22923527	22923528	22923526	22923518	22923521
% recovery of the surrogate standard to check the efficiency of the method. The results of individual compounds within samples aren't corrected for the recovery										
(F) Trigger breach confirmed										
1-4*5@ Sample deviation (see appendix)										
Component	LOD/Units	Method								
Suspended solids, Total	<2 mg/l	TM022				<2	2	<2	<2	<2
						#	#	#	#	#
Alkalinity, Total as CaCO3	<2 mg/l	TM043			505	175	160		285	96.9
					#	#	#		#	#
Ammoniacal Nitrogen as N	<0.2 mg/l	TM099			42.7	0.207	<0.2		<0.2	<0.2
						2 #	#		#	#
Conductivity @ 20 deg.C	<0.02 mS/cm	TM120			1.22	0.438	0.312	0.621	0.508	0.228
					#	#	#	#	#	#
Arsenic (diss.filt)	<0.5 µg/l	TM152			<0.5					
					#					
Barium (diss.filt)	<0.2 µg/l	TM152			112					
					#					
Beryllium (diss.filt)	<0.1 µg/l	TM152			<0.1					
					#					
Boron (diss.filt)	<10 µg/l	TM152			179					
					#					
Cadmium (diss.filt)	<0.08 µg/l	TM152			<0.08					
					#					
Chromium (diss.filt)	<1 µg/l	TM152			<1					
					#					
Copper (diss.filt)	<0.3 µg/l	TM152			<0.3					
					#					
Lead (diss.filt)	<0.2 µg/l	TM152			<0.2					
					#					
Manganese (diss.filt)	<3 µg/l	TM152			342					
					#					
Nickel (diss.filt)	<0.4 µg/l	TM152			3.28					
					#					
Phosphorus (diss.filt)	<10 µg/l	TM152			16.4					
					#					
Zinc (diss.filt)	<1 µg/l	TM152			3.47					
					#					
Sodium (Dis.Filt)	<0.076 mg/l	TM152			61.6					
					#					
Magnesium (Dis.Filt)	<0.036 mg/l	TM152			15.7					
					#					
Potassium (Dis.Filt)	<0.2 mg/l	TM152			33.2	9.09	1.71		6.4	0.94
					#	#	#		#	#
Calcium (Dis.Filt)	<0.2 mg/l	TM152			103					
					#					
Iron (Dis.Filt)	<0.019 mg/l	TM152			0.451					
					#					
Hardness, Total as CaCO3 unfiltered	<0.35 mg/l	TM152			349					
					2					
Mercury (diss.filt)	<0.01 µg/l	TM183			<0.01					
					#					
Sulphate	<2 mg/l	TM184			15					
Chloride	<2 mg/l	TM184			111	31.4	10.2		13.3	10.5
						#	#		#	#
Phosphate (Ortho as P)	<0.02 mg/l	TM184			<0.02					
pH	<1 pH Units	TM256			7.51	8.01	8.03	7.67	8.1	7.88
					#	#	#	#	#	#
Mecoprop	<0.04 µg/l	TM411			<8					



CERTIFICATE OF ANALYSIS

Validated

SDG: 200930-12
Location: CarmarthenClient Reference:
Order Number:Report Number: 571106
Superseded Report:

PAH Spec MS - Aqueous (W)

Results Legend			Customer Sample Ref.		BH10		L1						
#	ISO17025 accredited.		Depth (m) Sample Type Date Sampled Sample Time Date Received SDG Ref Lab Sample No.(s) AGS Reference		Ground Water (GW)		Land Leachate (LE)						
M	mCERTS accredited.				28/09/2020		28/09/2020						
aq	Aqueous / settled sample.				09:55:00		13:00:00						
diss.filt	Dissolved / filtered sample.				30/09/2020		30/09/2020						
tot.unfilt	Total / unfiltered sample.				200930-12		200930-12						
*	Subcontracted - refer to subcontractor report for accreditation status.				22923522		22923525						
**	% recovery of the surrogate standard to check the efficiency of the method. The results of individual compounds within samples aren't corrected for the recovery												
(F)	Trigger breach confirmed												
1-4*5@	Sample deviation (see appendix)												
Component	LOD/Units	Method											
Naphthalene (aq)	<0.01 µg/l	TM178	3.78		<0.01								
			#										
Acenaphthene (aq)	<0.005 µg/l	TM178	0.741		<0.005								
			#										
Acenaphthylene (aq)	<0.005 µg/l	TM178	0.0267		<0.005								
			#										
Fluoranthene (aq)	<0.005 µg/l	TM178	1.32		<0.005								
			#										
Anthracene (aq)	<0.005 µg/l	TM178	0.0995		<0.005								
			#										
Phenanthrene (aq)	<0.005 µg/l	TM178	0.85		<0.005								
			#										
Fluorene (aq)	<0.005 µg/l	TM178	0.354		<0.005								
			#										
Chrysene (aq)	<0.005 µg/l	TM178	0.566		<0.005								
			#										
Pyrene (aq)	<0.005 µg/l	TM178	1.22		<0.005								
			#										
Benzo(a)anthracene (aq)	<0.005 µg/l	TM178	0.471		<0.005								
			#										
Benzo(b)fluoranthene (aq)	<0.005 µg/l	TM178	0.789		<0.005								
			#										
Benzo(k)fluoranthene (aq)	<0.005 µg/l	TM178	0.247		<0.005								
			#										
Benzo(a)pyrene (aq)	<0.002 µg/l	TM178	0.531		0.00302								
			#										
Dibenzo(a,h)anthracene (aq)	<0.005 µg/l	TM178	0.0972		<0.005								
			#										
Benzo(g,h,i)perylene (aq)	<0.005 µg/l	TM178	0.468		<0.005								
			#										
Indeno(1,2,3-cd)pyrene (aq)	<0.005 µg/l	TM178	0.387		<0.005								
			#										
PAH, Total Detected USEPA 16 (aq)	<0.082 µg/l	TM178	11.9		<0.082								
			#										



CERTIFICATE OF ANALYSIS

Validated

SDG: 200930-12
Location: Carmarthen

Client Reference:
Order Number:

Report Number: 571106
Superseded Report:

Table of Results - Appendix

Method No	Reference	Description
TM022	Method 2540D, AWWA/APHA, 20th Ed., 1999 / BS 2690: Part120 1981;BS EN 872	Determination of total suspended solids in waters
TM043	Method 2320B, AWWA/APHA, 20th Ed., 1999 / BS 2690: Part109 1984	Determination of alkalinity in aqueous samples
TM099	BS 2690: Part 7:1968 / BS 6068: Part2.11:1984	Determination of Ammonium in Water Samples using the Kone Analyser
TM120	Method 2510B, AWWA/APHA, 20th Ed., 1999 / BS 2690: Part 9:1970	Determination of Electrical Conductivity using a Conductivity Meter
TM152	Method 3125B, AWWA/APHA, 20th Ed., 1999	Analysis of Aqueous Samples by ICP-MS
TM178	Modified: US EPA Method 8100	Determination of Polynuclear Aromatic Hydrocarbons (PAH) by GC-MS in Waters
TM183	BS EN 23506:2002, (BS 6068-2.74:2002) ISBN 0 580 38924 3	Determination of Trace Level Mercury in Waters and Leachates by PSA Cold Vapour Atomic Fluorescence Spectrometry
TM184	EPA Methods 325.1 & 325.2,	The Determination of Anions in Aqueous Matrices using the Kone Spectrophotometric Analysers
TM256	The measurement of Electrical Conductivity and the Laboratory determination of pH Value of Natural, Treated and Wastewaters. HMSO, 1978. ISBN 011 751428 4.	Determination of pH in Water and Leachate using the GLpH pH Meter
TM411	Acid_Herbs_GCMS	Acid Herbs in Water by GCMS

NA = not applicable.

Chemical testing (unless subcontracted) performed at ALS Life Sciences Ltd Hawarden (Method codes TM) or ALS Life Sciences Ltd Aberdeen (Method codes S).



CERTIFICATE OF ANALYSIS

Validated

SDG: 200930-12
Location: Carmarthen

Client Reference:
Order Number:

Report Number: 571106
Superseded Report:

Test Completion Dates

Lab Sample No(s)
Customer Sample Ref.

AGS Ref.
Depth
Type

	22923522	22923532	22923531	22923530	22923529	22923523	22923525	22923527	22923528	22923526
	BH10	BH101	BH103	BH104	BH105	BH117	L1	NYC SW1	NYC SW4	RUN OFF
	Ground Water	Ground Water	Ground Water	Ground Water	Ground Water	Ground Water	Land Leachate	Surface Water	Surface Water	Surface Water
Acid Herbicides by GCMS	14-Oct-2020						14-Oct-2020			
Alkalinity as CaCO ₃	07-Oct-2020	07-Oct-2020	07-Oct-2020	08-Oct-2020	07-Oct-2020	07-Oct-2020	07-Oct-2020	07-Oct-2020	07-Oct-2020	
Ammoniacal Nitrogen	09-Oct-2020	09-Oct-2020	09-Oct-2020	09-Oct-2020	09-Oct-2020	09-Oct-2020	09-Oct-2020	09-Oct-2020	09-Oct-2020	
Anions by Kone (w)	07-Oct-2020	08-Oct-2020	07-Oct-2020	07-Oct-2020	07-Oct-2020	08-Oct-2020	07-Oct-2020	07-Oct-2020	07-Oct-2020	
Conductivity (at 20 deg.C)	07-Oct-2020	07-Oct-2020	07-Oct-2020	07-Oct-2020	07-Oct-2020	07-Oct-2020	07-Oct-2020	07-Oct-2020	07-Oct-2020	07-Oct-2020
Dissolved Metals by ICP-MS	09-Oct-2020	08-Oct-2020	08-Oct-2020	08-Oct-2020	08-Oct-2020	08-Oct-2020	08-Oct-2020	08-Oct-2020	08-Oct-2020	
Mercury Dissolved	10-Oct-2020						10-Oct-2020			
PAH Spec MS - Aqueous (W)	12-Oct-2020						12-Oct-2020			
pH Value	08-Oct-2020	08-Oct-2020	08-Oct-2020	08-Oct-2020	08-Oct-2020	08-Oct-2020	08-Oct-2020	08-Oct-2020	08-Oct-2020	08-Oct-2020
Phosphate by Kone (w)	08-Oct-2020						08-Oct-2020			
Suspended Solids								08-Oct-2020	08-Oct-2020	08-Oct-2020
Total Metals by ICP-MS							09-Oct-2020			

Lab Sample No(s)
Customer Sample Ref.

AGS Ref.
Depth
Type

	22923518	22923521
	WERN SW2	WERN SW4
	Surface Water	Surface Water
Alkalinity as CaCO ₃	07-Oct-2020	08-Oct-2020
Ammoniacal Nitrogen	09-Oct-2020	09-Oct-2020
Anions by Kone (w)	07-Oct-2020	08-Oct-2020
Conductivity (at 20 deg.C)	07-Oct-2020	07-Oct-2020
Dissolved Metals by ICP-MS	08-Oct-2020	08-Oct-2020
pH Value	08-Oct-2020	08-Oct-2020
Suspended Solids	08-Oct-2020	08-Oct-2020



CERTIFICATE OF ANALYSIS

SDG:	200930-12	Client Reference:	Report Number:	571106
Location:	Carmarthen	Order Number:	Superseded Report:	

Appendix

General

1. Results are expressed on a dry weight basis (dried at 35°C) for all soil analyses except for the following: NRA and CEN Leach tests, flash point LOI, pH, ammonium as NH₄ by the BRE method, VOC TICs and SVOC TICs.

2. If sufficient sample is received a sub sample will be retained free of charge for 30 days after analysis is completed (e-mailed) for all sample types unless the sample is destroyed on testing. The prepared soil sub sample that is analysed for asbestos will be retained for a period of 6 months after the analysis date. All bulk samples will be retained for a period of 6 months after the analysis date. All samples received and not scheduled will be disposed of one month after the date of receipt unless we are instructed to the contrary. Once the initial period has expired, a storage charge will be applied for each month or part thereof until the client cancels the request for sample storage. ALS reserve the right to charge for samples received and stored but not analysed.

3. With respect to turnaround, we will always endeavour to meet client requirements wherever possible, but turnaround times cannot be absolutely guaranteed due to so many variables beyond our control.

4. We take responsibility for any test performed by sub-contractors (marked with an asterisk). We endeavour to use UKAS/MCERTS Accredited Laboratories, who either complete a quality questionnaire or are audited by ourselves. For some determinands there are no UKAS/MCERTS Accredited Laboratories, in this instance a laboratory with a known track record will be utilised.

5. If no separate volatile sample is supplied by the client, or if a headspace or sediment is present in the volatile sample, the integrity of the data may be compromised. This will be flagged up as an invalid VOC on the test schedule and the result marked as deviating on the test certificate.

6. NDP - No determination possible due to insufficient/unsuitable sample.

7. Results relate only to the items tested.

8. LoDs (Limit of Detection) for wet tests reported on a dry weight basis are not corrected for moisture content.

9. **Surrogate recoveries** - Surrogates are added to your sample to monitor recovery of the test requested. A % recovery is reported, results are not corrected for the recovery measured. Typical recoveries for organics tests are 70-130%. Recoveries in soils are affected by organic rich or clay rich matrices. Waters can be affected by remediation fluids or high amounts of sediment. Test results are only ever reported if all of the associated quality checks pass; it is assumed that all recoveries outside of the values above are due to matrix affect.

10. Stones/debris are not routinely removed. We always endeavour to take a representative sub sample from the received sample.

11. In certain circumstances the method detection limit may be elevated due to the sample being outside the calibration range. Other factors that may contribute to this include possible interferences. In both cases the sample would be diluted which would cause the method detection limit to be raised.

12. Mercury results quoted on soils will not include volatile mercury as the analysis is performed on a dried and crushed sample.

13. For leachate preparations other than Zero Headspace Extraction (ZHE) volatile loss may occur.

14. For the BSEN 12457-3 two batch process to allow the cumulative release to be calculated, the volume of the leachate produced is measured and filtered for all tests. We therefore cannot carry out any unfiltered analysis. The tests affected include volatiles GCFID/GCMS and all subcontracted analysis.

15. Analysis and identification of specific compounds using GCFID is by retention time only, and we routinely calibrate and quantify for benzene, toluene, ethylbenzenes and xylenes (BTEX). For total volatiles in the C5-C12 range, the total area of the chromatogram is integrated and expressed as ug/kg or ug/l. Although this analysis is commonly used for the quantification of gasoline range organics (GRO), the system will also detect other compounds such as chlorinated solvents, and this may lead to a falsely high result with respect to hydrocarbons only. It is not possible to specifically identify these non-hydrocarbons, as standards are not routinely run for any other compounds, and for more definitive identification, volatiles by GCMS should be utilised.

16. We are accredited to MCERTS for sand, clay and loam/topsoil, or any of these materials - whether these are derived from naturally occurring soil profiles, or from fill/made ground, as long as these materials constitute the major part of the sample. Other coarse granular material such as concrete, gravel and brick are not accredited if they comprise the major part of the sample.

17. **Tentatively Identified Compounds (TICs)** are non-target peaks in VOC and SVOC analysis. All non-target peaks detected with a concentration above the LoD are subjected to a mass spectral library search. Non-target peaks with a library search confidence of >75% are reported based on the best mass spectral library match. When a non-target peak with a library search confidence of <75% is detected it is reported as "mixed hydrocarbons". Non-target compounds identified from the scan data are semi-quantified relative to one of the deuterated internal standards, under the same chromatographic conditions as the target compounds. This result is reported as a semi-quantitative value and reported as Tentatively Identified Compounds (TICs). TICs are outside the scope of UKAS accreditation and are not moisture corrected.

18. Sample Deviations

If a sample is classed as deviated then the associated results may be compromised.

1	Container with Headspace provided for volatiles analysis
2	Incorrect container received
3	Deviation from method
4	Matrix interference
◆	Sample holding time exceeded in laboratory
@	Sample holding time exceeded due to late arrival of instructions or samples
§	Sampled on date not provided

19. Asbestos

When requested, the individual sub sample scheduled will be analysed in house for the presence of asbestos fibres and asbestos containing material by our documented in house method TM048 based on HSG 248 (2005), which is accredited to ISO17025. If a specific asbestos fibre type is not found this will be reported as "Not detected". If no asbestos fibre types are found all will be reported as "Not detected" and the sub sample analysed deemed to be clear of asbestos. If an asbestos fibre type is found it will be reported as detected (for each fibre type found). Testing can be carried out on asbestos positive samples, but, due to Health and Safety considerations, may be replaced by alternative tests or reported as No Determination Possible (NDP). The quantity of asbestos present is not determined unless specifically requested.

Identification of Asbestos in Bulk Materials & Soils

The results for identification of asbestos in bulk materials are obtained from supplied bulk materials which have been examined to determine the presence of asbestos fibres using ALS (Hawarden) in-house method of transmitted/polarised light microscopy and central stop dispersion staining, based on HSG 248 (2005).

The results for identification of asbestos in soils are obtained from a homogenised sub sample which has been examined to determine the presence of asbestos fibres using ALS (Hawarden) in-house method of transmitted/polarised light microscopy and central stop dispersion staining, based on HSG 248 (2005).

Asbestos Type	Common Name
Chrysotile	White Asbestos
Amosite	Brown Asbestos
Crocidolite	Blue Asbestos
Fibrous Actinolite	-
Fibrous Anthophyllite	-
Fibrous Tremolite	-

Visual Estimation Of Fibre Content

Estimation of fibre content is not permitted as part of our UKAS accredited test other than: - Trace - Where only one or two asbestos fibres were identified.

Respirable Fibres

Respirable fibres are defined as fibres of <3 µm diameter, longer than 5 µm and with aspect ratios of at least 3:1 that can be inhaled into the lower regions of the lung and are generally acknowledged to be most important predictor of hazard and risk for cancers of the lung. Standing Committee of Analysts, *The Quantification of Asbestos in Soil* (2017).

Further guidance on typical asbestos fibre content of manufactured products can be found in HSG 264.

The identification of asbestos containing materials and soils falls within our schedule of tests for which we hold UKAS accreditation, however opinions, interpretations and all other information contained in the report are outside the scope of UKAS accreditation.



Geotechnology
5 Cefn-yr-Allt
Aberdulais
Neath
West Glamorgan
SA10 8HE

Attention: Ben Rees

Unit 7-8 Hawarden Business Park
Manor Road (off Manor Lane)
Hawarden
Deeside
CH5 3US
Tel: (01244) 528700
Fax: (01244) 528701
email: hawardencustomerservices@alsglobal.com
Website: www.alsenvironmental.co.uk

CERTIFICATE OF ANALYSIS

Date of report Generation: 21 December 2020
Customer: Geotechnology
Sample Delivery Group (SDG): 201212-21
Your Reference:
Location: Carmarthen
Report No: 581049

We received 13 samples on Saturday December 12, 2020 and 13 of these samples were scheduled for analysis which was completed on Monday December 21, 2020. Accredited laboratory tests are defined within the report, but opinions, interpretations and on-site data expressed herein are outside the scope of ISO 17025 accreditation.

Should this report require incorporation into client reports, it must be used in its entirety and not simply with the data sections alone.

Chemical testing (unless subcontracted) performed at ALS Life Sciences Ltd Hawarden (Method codes TM) or ALS Life Sciences Ltd Aberdeen (Method codes S).

All sample data is provided by the customer. The reported results relate to the sample supplied, and on the basis that this data is correct.

Incorrect sampling dates and/or sample information will affect the validity of results.

The customer is not permitted to reproduce this report except in full without the approval of the laboratory.

Approved By:

Sonia McWhan

Operations Manager





CERTIFICATE OF ANALYSIS

Validated

SDG: 201212-21
Location: Carmarthen

Client Reference:
Order Number:

Report Number: 581049
Superseded Report:

Received Sample Overview

Lab Sample No(s)	Customer Sample Ref.	AGS Ref.	Depth (m)	Sampled Date
23417704	BH101			11/12/2020
23417699	BH103			11/12/2020
23417701	BH104			11/12/2020
23417703	BH105			11/12/2020
23417705	BH117			11/12/2020
23417700	L1			11/12/2020
23417710	LAGOON IN			11/12/2020
23417711	LAGOON OUT			11/12/2020
23417706	NYC SW1			11/12/2020
23417702	NYC SW4			11/12/2020
23417707	RUN OFF			11/12/2020
23417708	WERN SW2			11/12/2020
23417712	WERN SW4			11/12/2020

Only received samples which have had analysis scheduled will be shown on the following pages.



CERTIFICATE OF ANALYSIS

Validated

SDG: 201212-21
Location: Carmarthen

Client Reference:
Order Number:

Report Number: 581049
Superseded Report:

Results Legend

X Test
N No Determination Possible

Sample Types -

S - Soil/Solid
UNS - Unspecified Solid
GW - Ground Water
SW - Surface Water
LE - Land Leachate
PL - Prepared Leachate
PR - Process Water
SA - Saline Water
TE - Trade Effluent
TS - Treated Sewage
US - Untreated Sewage
RE - Recreational Water
DW - Drinking Water Non-regulatory
UNL - Unspecified Liquid
SL - Sludge
G - Gas
OTH - Other

Results Legend	Lab Sample No(s)		Customer Sample Reference		AGS Reference		Depth (m)		Container		Sample Type	
	23417704	BH101							H2SO4 (ALE244)	500ml Plastic (ALE208)	0.5l glass bottle (ALE227)	GW
	23417699	BH103							H2SO4 (ALE244)	500ml Plastic (ALE208)	0.5l glass bottle (ALE227)	GW
	23417701	BH104							H2SO4 (ALE244)	500ml Plastic (ALE208)	0.5l glass bottle (ALE227)	GW
	23417703	BH105							H2SO4 (ALE244)	500ml Plastic (ALE208)	0.5l glass bottle (ALE227)	GW
	23417705	BH117							H2SO4 (ALE244)	500ml Plastic (ALE208)	0.5l glass bottle (ALE227)	GW
Acid Herbicides by GCMS	All	NDPs: 0 Tests: 6										
Alkalinity as CaCO3	All	NDPs: 0 Tests: 10										
Ammoniacal Nitrogen	All	NDPs: 0 Tests: 12										
Anions by Kone (w)	All	NDPs: 0 Tests: 12										
Conductivity (at 20 deg.C)	All	NDPs: 0 Tests: 13										
Dissolved Metals by ICP-MS	All	NDPs: 0 Tests: 12										
Mercury Dissolved	All	NDPs: 0 Tests: 6										
PAH Spec MS - Aqueous (W)	All	NDPs: 0 Tests: 6										
pH Value	All	NDPs: 0 Tests: 13										
Phosphate by Kone (w)	All	NDPs: 0 Tests: 6										
Suspended Solids	All	NDPs: 0 Tests: 7										
Total Metals by ICP-MS	All	NDPs: 0 Tests: 6										



CERTIFICATE OF ANALYSIS

Validated

SDG: 201212-21
Location: Carmarthen

Client Reference:
Order Number:

Report Number: 581049
Superseded Report:

Results Legend



Test


No Determination
Possible

Sample Types -

S - Soil/Solid
UNS - Unspecified Solid
GW - Ground Water
SW - Surface Water
LE - Land Leachate
PL - Prepared Leachate
PR - Process Water
SA - Saline Water
TE - Trade Effluent
TS - Treated Sewage
US - Untreated Sewage
RE - Recreational Water
DW - Drinking Water Non-regulatory
UNL - Unspecified Liquid
SL - Sludge
G - Gas
OTH - Other

Lab Sample No(s)

23417712

Customer
Sample Reference

WERN SW4

AGS Reference

Depth (m)

Container

HNO3 Filtered
(ALE204)
H2SO4 (ALE244)

Sample Type

SW
SW

Ammoniacal Nitrogen

All

NDPs: 0
Tests: 12

X

Dissolved Metals by ICP-MS

All

NDPs: 0
Tests: 12

X



CERTIFICATE OF ANALYSIS

SDG: 201212-21
Location: Carmarthen

Client Reference:
Order Number:

Report Number: 581049
Superseded Report:

Results Legend			Customer Sample Ref.		BH101	BH103	BH104	BH105	BH117	L1
#	ISO17025 accredited.		Depth (m) Sample Type Date Sampled Sample Time Date Received SDG Ref Lab Sample No.(s) AGS Reference		Ground Water (GW)	Ground Water (GW)	Ground Water (GW)	Ground Water (GW)	Ground Water (GW)	Land Leachate (LE)
M	mCERTS accredited.				11/12/2020	11/12/2020	11/12/2020	11/12/2020	11/12/2020	11/12/2020
aq	Aqueous / settled sample.				12:00:00	11:10:00	10:55:00	10:40:00	12:30:00	11:40:00
diss.filt	Dissolved / filtered sample.				12/12/2020	12/12/2020	12/12/2020	12/12/2020	12/12/2020	12/12/2020
tot.unfilt	Total / unfiltered sample.				201212-21	201212-21	201212-21	201212-21	201212-21	201212-21
Subcontracted - refer to subcontractor report for accreditation status.					23417704	23417699	23417701	23417703	23417705	23417700
% recovery of the surrogate standard to check the efficiency of the method. The results of individual compounds within samples aren't corrected for the recovery										
(F) Trigger breach confirmed										
1-4-5@ Sample deviation (see appendix)										
Component	LOD/Units	Method								
Alkalinity, Total as CaCO ₃	<2 mg/l	TM043			230	215	300	240	257	575
					#	#	#	#	#	#
Ammoniacal Nitrogen as N	<0.2 mg/l	TM099			<0.2	<0.2	<0.2	<0.2	<0.2	49.4
					#	#	#	#	#	
Conductivity @ 20 deg.C	<0.02 mS/cm	TM120			0.412	0.389	0.495	0.455	0.469	1.25
					#	#	#	#	#	#
Arsenic (diss.filt)	<0.5 µg/l	TM152			<0.5	<0.5	<0.5	<0.5	<0.5	0.793
					#	#	#	#	2 #	#
Barium (diss.filt)	<0.2 µg/l	TM152			120	58	15.1	57	36.3	118
					#	#	#	#	2 #	#
Beryllium (diss.filt)	<0.1 µg/l	TM152			<0.1	<0.1	<0.1	<0.1	<0.1	<0.1
					#	#	#	#	2 #	#
Boron (diss.filt)	<10 µg/l	TM152			11.3	<10	<10	<10	<10	211
					#	#	#	#	2 #	#
Cadmium (diss.filt)	<0.08 µg/l	TM152			<0.08	<0.08	<0.08	<0.08	<0.08	<0.08
					#	#	#	#	2 #	#
Chromium (diss.filt)	<1 µg/l	TM152			<1	<1	<1	<1	<1	1.63
					#	#	#	#	2 #	#
Copper (diss.filt)	<0.3 µg/l	TM152			<0.3	<0.3	1.46	<0.3	3.78	1.11
					#	#	#	#	2 #	#
Lead (diss.filt)	<0.2 µg/l	TM152			<0.2	<0.2	<0.2	<0.2	<0.2	<0.2
					#	#	#	#	2 #	#
Manganese (diss.filt)	<3 µg/l	TM152			<3	<3	30	14.4	5.77	466
					#	#	#	#	2 #	#
Nickel (diss.filt)	<0.4 µg/l	TM152			<0.4	<0.4	0.547	<0.4	<0.4	5.02
					#	#	#	#	2 #	#
Phosphorus (diss.filt)	<10 µg/l	TM152			13.5	21.4	17.8	22.7	25.6	34.4
					#	#	#	#	2 #	#
Zinc (diss.filt)	<1 µg/l	TM152			<1	1.72	2.71	1.97	1.75	197
					#	#	#	#	2 #	#
Sodium (Dis.Filt)	<0.076 mg/l	TM152			14	13.6	7.9	10.6	12.6	73.1
					#	#	#	#	2 #	#
Magnesium (Dis.Filt)	<0.036 mg/l	TM152			11.4	7.78	9.23	9.19	7.09	17.2
					#	#	#	#	2 #	#
Potassium (Dis.Filt)	<0.2 mg/l	TM152			0.971	0.936	0.763	0.987	0.631	47.4
					#	#	#	#	2 #	#
Calcium (Dis.Filt)	<0.2 mg/l	TM152			76.1	75	101	90.9	92.8	117
					#	#	#	#	2 #	#
Iron (Dis.Filt)	<0.019 mg/l	TM152			<0.019	<0.019	0.0286	<0.019	<0.019	1.03
					#	#	#	#	2 #	#
Hardness, Total as CaCO ₃ unfiltered	<0.35 mg/l	TM152			242	222	325	280	426	370
					2	2	2	2	2	2
Mercury (diss.filt)	<0.01 µg/l	TM183			<0.01	<0.01	<0.01	<0.01	<0.01	<0.01
					#	#	#	#	2 #	#
Sulphate	<2 mg/l	TM184			8.5	6.3	10.9	5.5	20.1	11.8
					#	#	#	#	#	
Chloride	<2 mg/l	TM184			14.2	14.5	7.8	10.4	21.9	118
					#	#	#	#	#	
Phosphate (Ortho as P)	<0.02 mg/l	TM184			<0.02	<0.02	<0.02	<0.02	0.0255	<0.02
					#	#	#	#	#	
pH	<1 pH Units	TM256			8.04	7.93	7.51	7.63	7.41	7.61
					#	#	#	#	#	#
Mecoprop	<0.04 µg/l	TM411			<0.04	<0.04	<0.04	<0.04	<0.04	<4

SDG:	201212-21
Location:	Carmarthen

Client Reference:
Order Number:

Report Number: 581049
Superseded Report:

Location: Carmarthen

Order Number:

Superseded Report:

[illegible]



CERTIFICATE OF ANALYSIS

Validated

SDG: 201212-21
Location: Carmarthen**Client Reference:**
Order Number:**Report Number:** 581049
Superseded Report:

Table of Results - Appendix

Method No	Reference	Description
TM022	Method 2540D, AWWA/APHA, 20th Ed., 1999 / BS 2690: Part120 1981;BS EN 872	Determination of total suspended solids in waters
TM043	Method 2320B, AWWA/APHA, 20th Ed., 1999 / BS 2690: Part109 1984	Determination of alkalinity in aqueous samples
TM099	BS 2690: Part 7:1968 / BS 6068: Part2.11:1984	Determination of Ammonium in Water Samples using the Kone Analyser
TM120	Method 2510B, AWWA/APHA, 20th Ed., 1999 / BS 2690: Part 9:1970	Determination of Electrical Conductivity using a Conductivity Meter
TM152	Method 3125B, AWWA/APHA, 20th Ed., 1999	Analysis of Aqueous Samples by ICP-MS
TM178	Modified: US EPA Method 8100	Determination of Polynuclear Aromatic Hydrocarbons (PAH) by GC-MS in Waters
TM183	BS EN 23506:2002, (BS 6068-2.74:2002) ISBN 0 580 38924 3	Determination of Trace Level Mercury in Waters and Leachates by PSA Cold Vapour Atomic Fluorescence Spectrometry
TM184	EPA Methods 325.1 & 325.2,	The Determination of Anions in Aqueous Matrices using the Kone Spectrophotometric Analysers
TM256	The measurement of Electrical Conductivity and the Laboratory determination of pH Value of Natural, Treated and Wastewaters. HMSO, 1978. ISBN 011 751428 4.	Determination of pH in Water and Leachate using the GLpH pH Meter
TM411	Acid_Herbs_GCMS	Acid Herbs in Water by GCMS

NA = not applicable.

Chemical testing (unless subcontracted) performed at ALS Life Sciences Ltd Hawarden (Method codes TM) or ALS Life Sciences Ltd Aberdeen (Method codes S).



CERTIFICATE OF ANALYSIS

Validated

SDG: 201212-21
Location: Carmarthen

Client Reference:
Order Number:

Report Number: 581049
Superseded Report:

Test Completion Dates

Lab Sample No(s)	23417704	23417699	23417701	23417703	23417705	23417700	23417710	23417711	23417706	23417702
Customer Sample Ref.	BH101	BH103	BH104	BH105	BH117	L1	LAGOON IN	LAGOON OUT	NYC SW1	NYC SW4
AGS Ref.										
Depth										
Type	Ground Water	Ground Water	Ground Water	Ground Water	Ground Water	Land Leachate	Surface Water	Surface Water	Surface Water	Surface Water
Acid Herbicides by GCMS	21-Dec-2020	21-Dec-2020	21-Dec-2020	21-Dec-2020	21-Dec-2020	21-Dec-2020				
Alkalinity as CaCO3	18-Dec-2020	18-Dec-2020	18-Dec-2020	18-Dec-2020	19-Dec-2020	18-Dec-2020			18-Dec-2020	21-Dec-2020
Ammoniacal Nitrogen	21-Dec-2020	21-Dec-2020	21-Dec-2020	21-Dec-2020	21-Dec-2020	21-Dec-2020	21-Dec-2020	21-Dec-2020	21-Dec-2020	21-Dec-2020
Anions by Kone (w)	18-Dec-2020	18-Dec-2020	18-Dec-2020	18-Dec-2020	18-Dec-2020	18-Dec-2020	18-Dec-2020	18-Dec-2020	18-Dec-2020	18-Dec-2020
Conductivity (at 20 deg.C)	15-Dec-2020	15-Dec-2020	15-Dec-2020	15-Dec-2020	15-Dec-2020	15-Dec-2020	15-Dec-2020	15-Dec-2020	15-Dec-2020	15-Dec-2020
Dissolved Metals by ICP-MS	21-Dec-2020	21-Dec-2020	21-Dec-2020	21-Dec-2020	21-Dec-2020	21-Dec-2020	21-Dec-2020	21-Dec-2020	21-Dec-2020	21-Dec-2020
Mercury Dissolved	15-Dec-2020	15-Dec-2020	18-Dec-2020	15-Dec-2020	15-Dec-2020	15-Dec-2020				
PAH Spec MS - Aqueous (W)	17-Dec-2020	17-Dec-2020	17-Dec-2020	17-Dec-2020	17-Dec-2020	17-Dec-2020				
pH Value	15-Dec-2020	15-Dec-2020	15-Dec-2020	15-Dec-2020	15-Dec-2020	15-Dec-2020	15-Dec-2020	15-Dec-2020	15-Dec-2020	15-Dec-2020
Phosphate by Kone (w)	16-Dec-2020	16-Dec-2020	16-Dec-2020	16-Dec-2020	16-Dec-2020	16-Dec-2020				
Suspended Solids							14-Dec-2020	14-Dec-2020	14-Dec-2020	15-Dec-2020
Total Metals by ICP-MS	17-Dec-2020	17-Dec-2020	17-Dec-2020	17-Dec-2020	17-Dec-2020	17-Dec-2020				

Lab Sample No(s)	23417707	23417708	23417712
Customer Sample Ref.	RUN OFF	WERN SW2	WERN SW4
AGS Ref.			
Depth			
Type	Surface Water	Surface Water	Surface Water
Alkalinity as CaCO3		18-Dec-2020	21-Dec-2020
Ammoniacal Nitrogen		21-Dec-2020	21-Dec-2020
Anions by Kone (w)		18-Dec-2020	18-Dec-2020
Conductivity (at 20 deg.C)	15-Dec-2020	15-Dec-2020	15-Dec-2020
Dissolved Metals by ICP-MS		21-Dec-2020	21-Dec-2020
pH Value	15-Dec-2020	15-Dec-2020	15-Dec-2020
Suspended Solids	14-Dec-2020	14-Dec-2020	14-Dec-2020



CERTIFICATE OF ANALYSIS

SDG:	201212-21	Client Reference:	Report Number:	581049
Location:	Carmarthen	Order Number:	Superseded Report:	

Appendix

General

1. Results are expressed on a dry weight basis (dried at 35°C) for all soil analyses except for the following: NRA and CEN Leach tests, flash point LOI, pH, ammonium as NH₄ by the BRE method, VOC TICs and SVOC TICs.

2. If sufficient sample is received a sub sample will be retained free of charge for 30 days after analysis is completed (e-mailed) for all sample types unless the sample is destroyed on testing. The prepared soil sub sample that is analysed for asbestos will be retained for a period of 6 months after the analysis date. All bulk samples will be retained for a period of 6 months after the analysis date. All samples received and not scheduled will be disposed of one month after the date of receipt unless we are instructed to the contrary. Once the initial period has expired, a storage charge will be applied for each month or part thereof until the client cancels the request for sample storage. ALS reserve the right to charge for samples received and stored but not analysed.

3. With respect to turnaround, we will always endeavour to meet client requirements wherever possible, but turnaround times cannot be absolutely guaranteed due to so many variables beyond our control.

4. We take responsibility for any test performed by sub-contractors (marked with an asterisk). We endeavour to use UKAS/MCERTS Accredited Laboratories, who either complete a quality questionnaire or are audited by ourselves. For some determinands there are no UKAS/MCERTS Accredited Laboratories, in this instance a laboratory with a known track record will be utilised.

5. If no separate volatile sample is supplied by the client, or if a headspace or sediment is present in the volatile sample, the integrity of the data may be compromised. This will be flagged up as an invalid VOC on the test schedule and the result marked as deviating on the test certificate.

6. NDP - No determination possible due to insufficient/unsuitable sample.

7. Results relate only to the items tested.

8. LoDs (Limit of Detection) for wet tests reported on a dry weight basis are not corrected for moisture content.

9. **Surrogate recoveries** - Surrogates are added to your sample to monitor recovery of the test requested. A % recovery is reported, results are not corrected for the recovery measured. Typical recoveries for organics tests are 70-130%. Recoveries in soils are affected by organic rich or clay rich matrices. Waters can be affected by remediation fluids or high amounts of sediment. Test results are only ever reported if all of the associated quality checks pass; it is assumed that all recoveries outside of the values above are due to matrix affect.

10. Stones/debris are not routinely removed. We always endeavour to take a representative sub sample from the received sample.

11. In certain circumstances the method detection limit may be elevated due to the sample being outside the calibration range. Other factors that may contribute to this include possible interferences. In both cases the sample would be diluted which would cause the method detection limit to be raised.

12. Mercury results quoted on soils will not include volatile mercury as the analysis is performed on a dried and crushed sample.

13. For leachate preparations other than Zero Headspace Extraction (ZHE) volatile loss may occur.

14. For the BSEN 12457-3 two batch process to allow the cumulative release to be calculated, the volume of the leachate produced is measured and filtered for all tests. We therefore cannot carry out any unfiltered analysis. The tests affected include volatiles GCFID/GCMS and all subcontracted analysis.

15. Analysis and identification of specific compounds using GCFID is by retention time only, and we routinely calibrate and quantify for benzene, toluene, ethylbenzenes and xylenes (BTEX). For total volatiles in the C5-C12 range, the total area of the chromatogram is integrated and expressed as ug/kg or ug/l. Although this analysis is commonly used for the quantification of gasoline range organics (GRO), the system will also detect other compounds such as chlorinated solvents, and this may lead to a falsely high result with respect to hydrocarbons only. It is not possible to specifically identify these non-hydrocarbons, as standards are not routinely run for any other compounds, and for more definitive identification, volatiles by GCMS should be utilised.

16. We are accredited to MCERTS for sand, clay and loam/topsoil, or any of these materials - whether these are derived from naturally occurring soil profiles, or from fill/made ground, as long as these materials constitute the major part of the sample. Other coarse granular material such as concrete, gravel and brick are not accredited if they comprise the major part of the sample.

17. **Tentatively Identified Compounds (TICs)** are non-target peaks in VOC and SVOC analysis. All non-target peaks detected with a concentration above the LoD are subjected to a mass spectral library search. Non-target peaks with a library search confidence of >75% are reported based on the best mass spectral library match. When a non-target peak with a library search confidence of <75% is detected it is reported as "mixed hydrocarbons". Non-target compounds identified from the scan data are semi-quantified relative to one of the deuterated internal standards, under the same chromatographic conditions as the target compounds. This result is reported as a semi-quantitative value and reported as Tentatively Identified Compounds (TICs). TICs are outside the scope of UKAS accreditation and are not moisture corrected.

18. Sample Deviations

If a sample is classed as deviated then the associated results may be compromised.

1	Container with Headspace provided for volatiles analysis
2	Incorrect container received
3	Deviation from method
4	Matrix interference
◆	Sample holding time exceeded in laboratory
@	Sample holding time exceeded due to late arrival of instructions or samples
§	Sampled on date not provided

19. Asbestos

When requested, the individual sub sample scheduled will be analysed in house for the presence of asbestos fibres and asbestos containing material by our documented in house method TM048 based on HSG 248 (2005), which is accredited to ISO17025. If a specific asbestos fibre type is not found this will be reported as "Not detected". If no asbestos fibre types are found all will be reported as "Not detected" and the sub sample analysed deemed to be clear of asbestos. If an asbestos fibre type is found it will be reported as detected (for each fibre type found). Testing can be carried out on asbestos positive samples, but, due to Health and Safety considerations, may be replaced by alternative tests or reported as No Determination Possible (NDP). The quantity of asbestos present is not determined unless specifically requested.

Identification of Asbestos in Bulk Materials & Soils

The results for identification of asbestos in bulk materials are obtained from supplied bulk materials which have been examined to determine the presence of asbestos fibres using ALS (Hawarden) in-house method of transmitted/polarised light microscopy and central stop dispersion staining, based on HSG 248 (2005).

The results for identification of asbestos in soils are obtained from a homogenised sub sample which has been examined to determine the presence of asbestos fibres using ALS (Hawarden) in-house method of transmitted/polarised light microscopy and central stop dispersion staining, based on HSG 248 (2005).

Asbestos Type	Common Name
Chrysotile	White Asbestos
Amosite	Brown Asbestos
Crocidolite	Blue Asbestos
Fibrous Actinolite	-
Fibrous Anthophyllite	-
Fibrous Tremolite	-

Visual Estimation Of Fibre Content

Estimation of fibre content is not permitted as part of our UKAS accredited test other than: - Trace - Where only one or two asbestos fibres were identified.

Respirable Fibres

Respirable fibres are defined as fibres of <3 µm diameter, longer than 5 µm and with aspect ratios of at least 3:1 that can be inhaled into the lower regions of the lung and are generally acknowledged to be most important predictor of hazard and risk for cancers of the lung.
Standing Committee of Analysts, *The Quantification of Asbestos in Soil* (2017).

Further guidance on typical asbestos fibre content of manufactured products can be found in HSG 264.




The identification of asbestos containing materials and soils falls within our schedule of tests for which we hold UKAS accreditation, however opinions, interpretations and all other information contained in the report are outside the scope of UKAS accreditation.




**NANT Y CAWS
PHASE 1
CLOSED LANDFILL**




**ENVIRONMENTAL
PERMIT 34183**



**2020 Annual
Environmental
Monitoring Report**

**Appendix 2
Leachate Chemistry**
Report Number 2119r1v1d0121

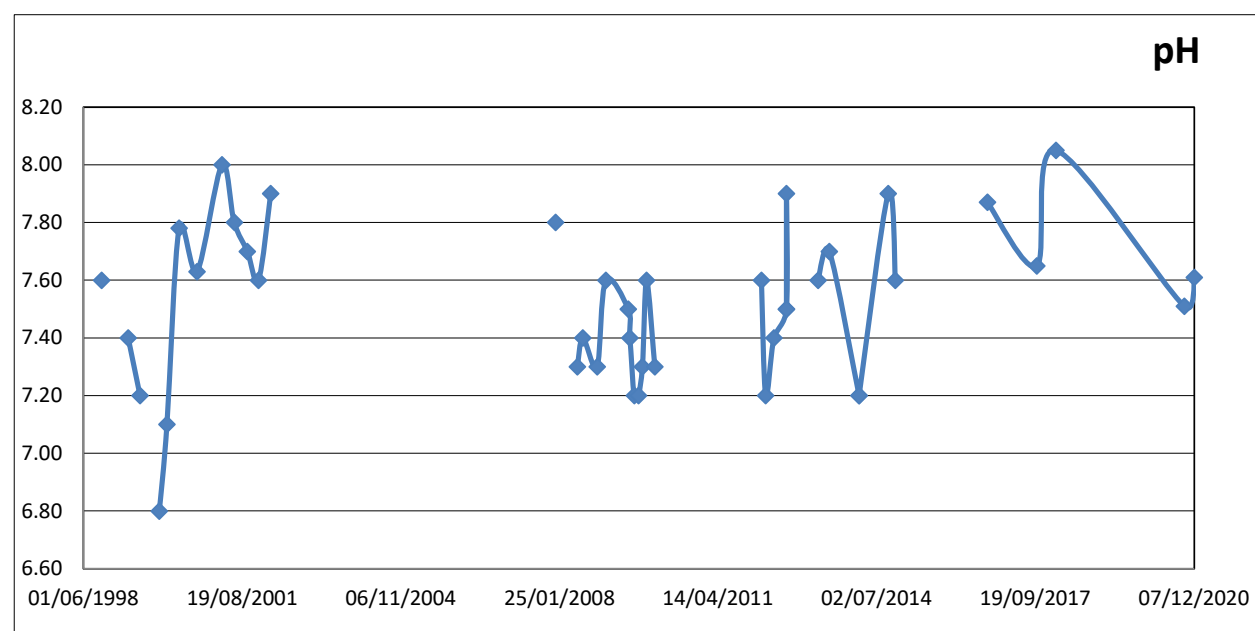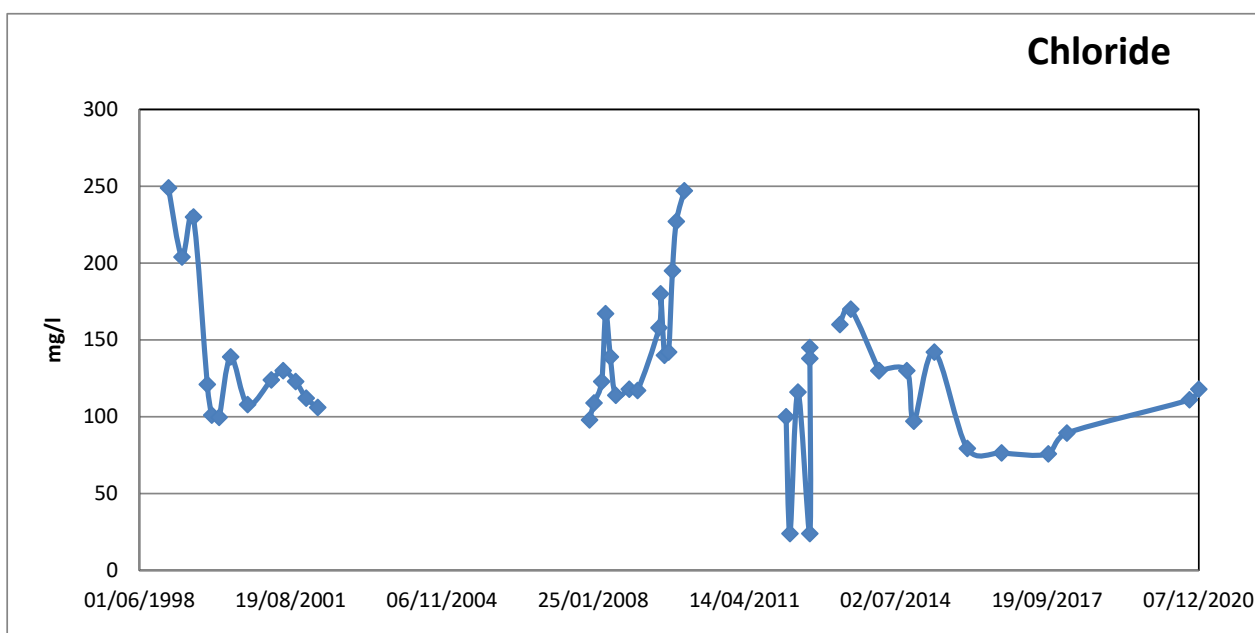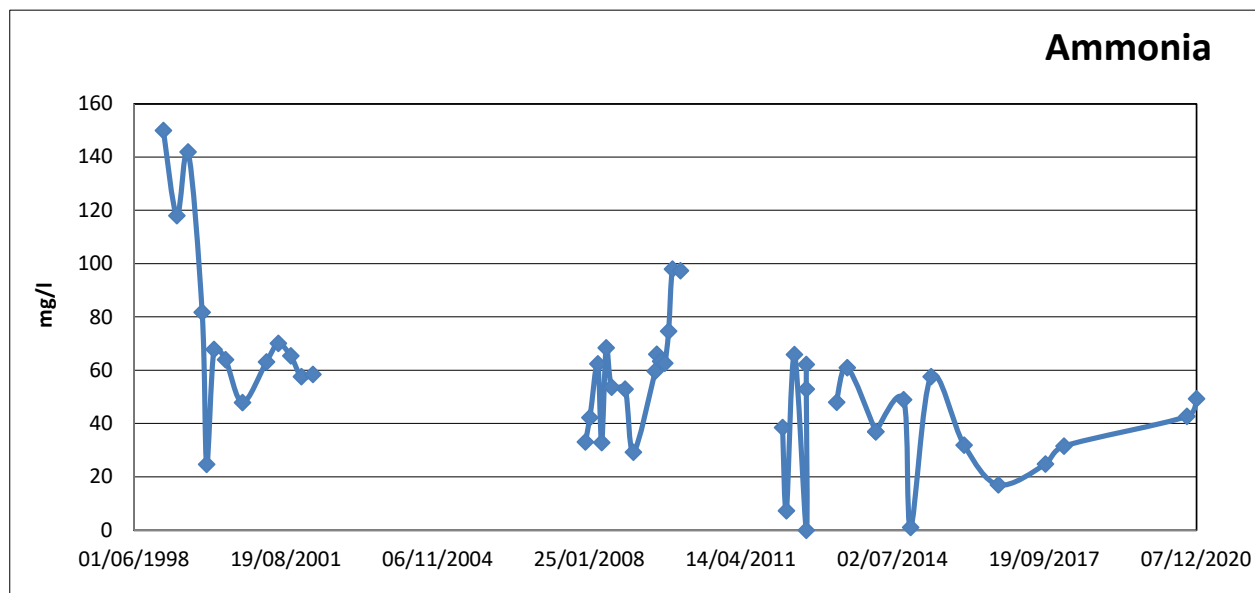

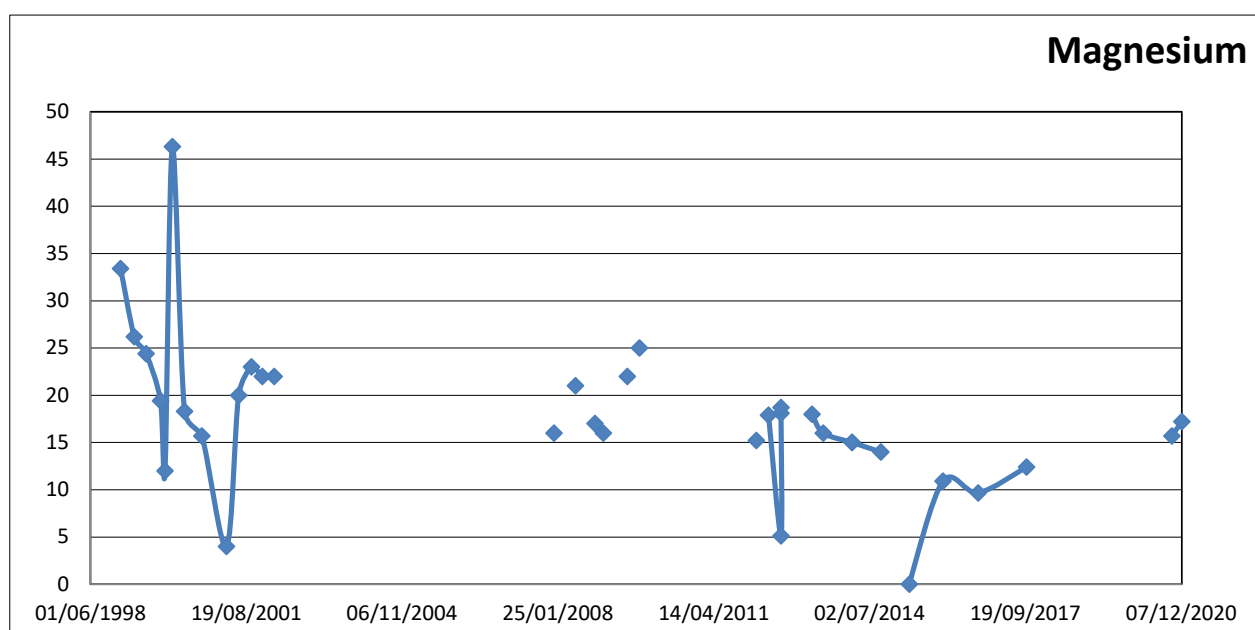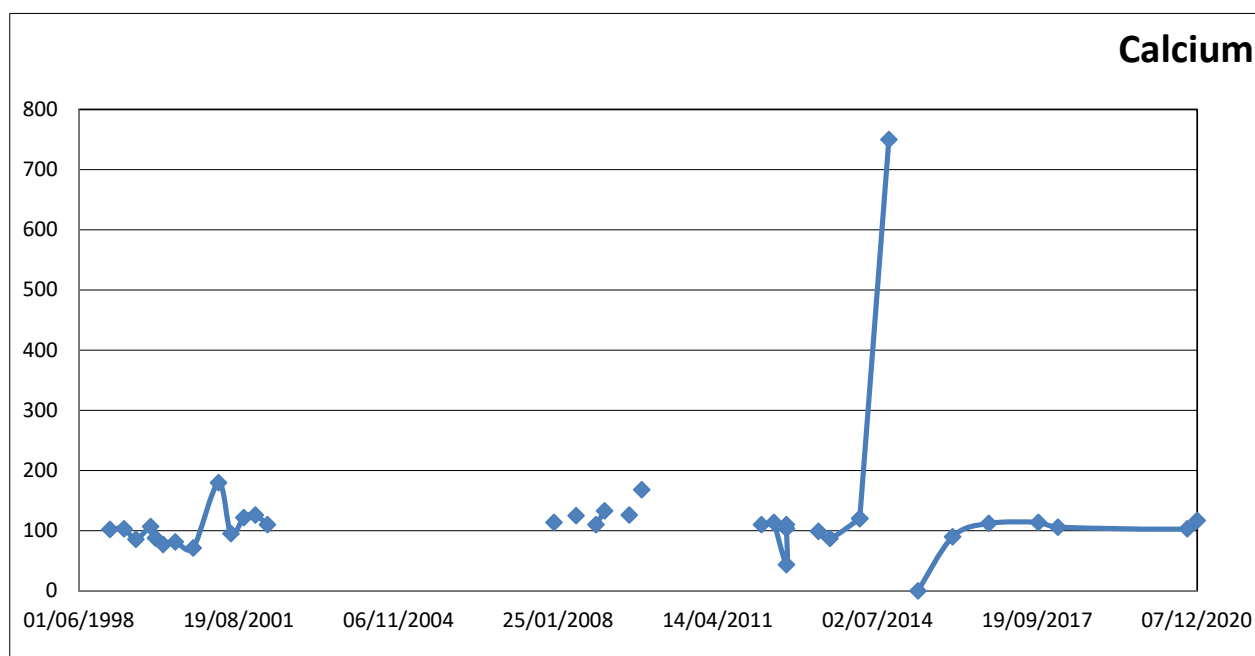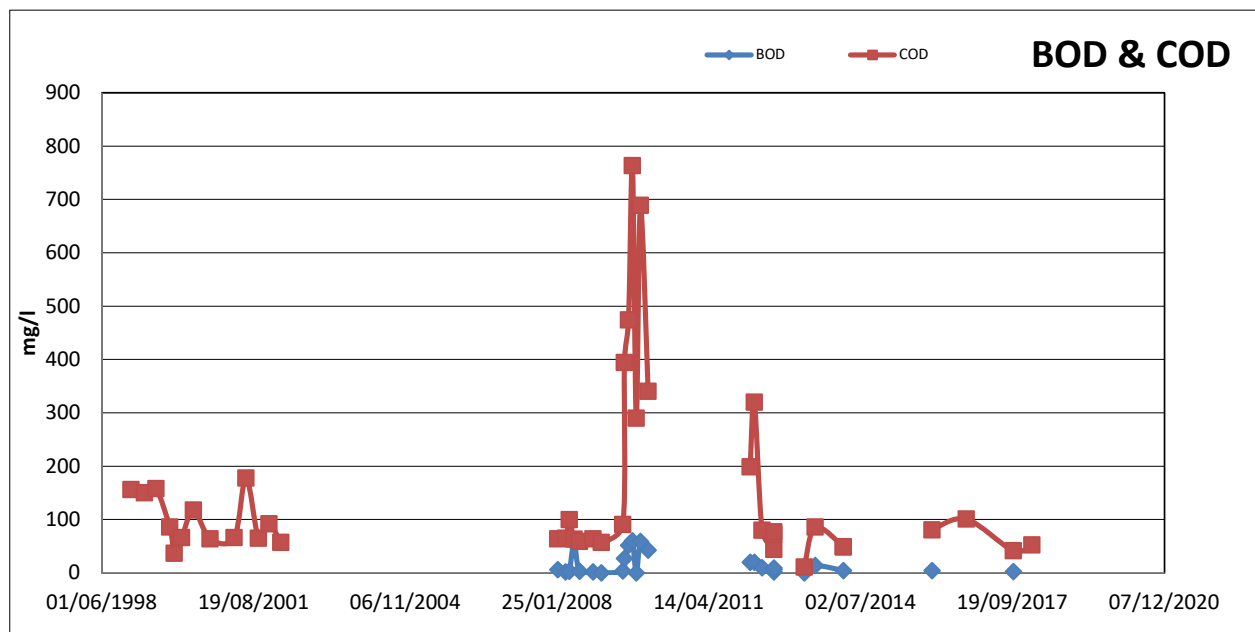

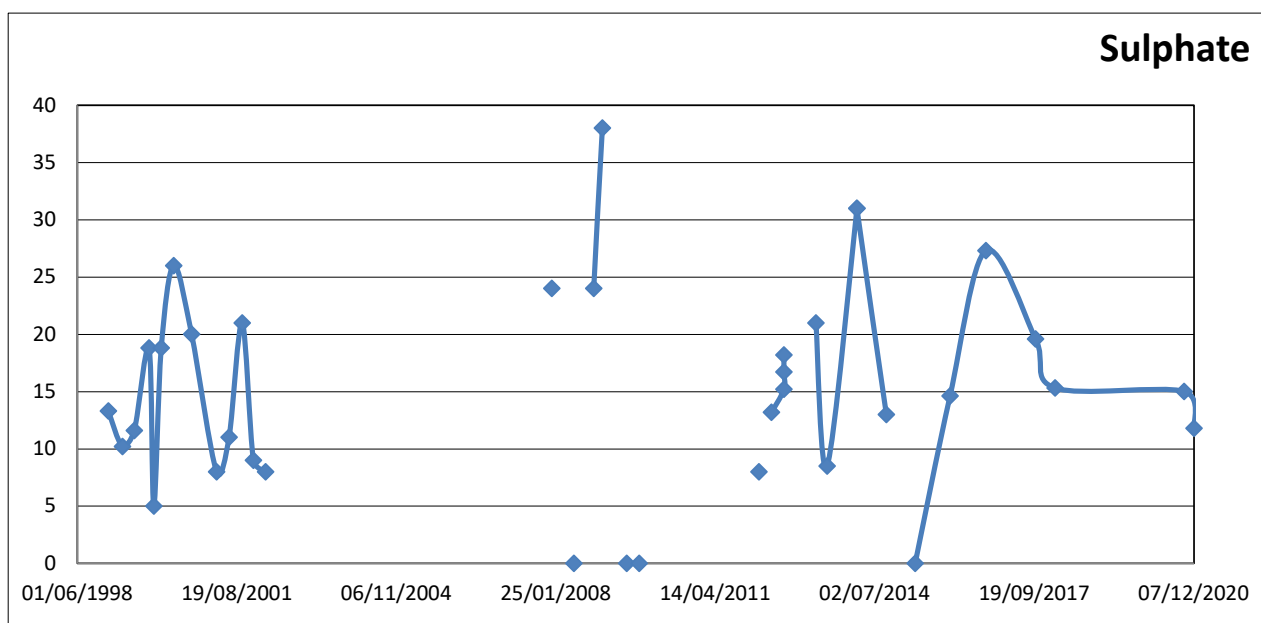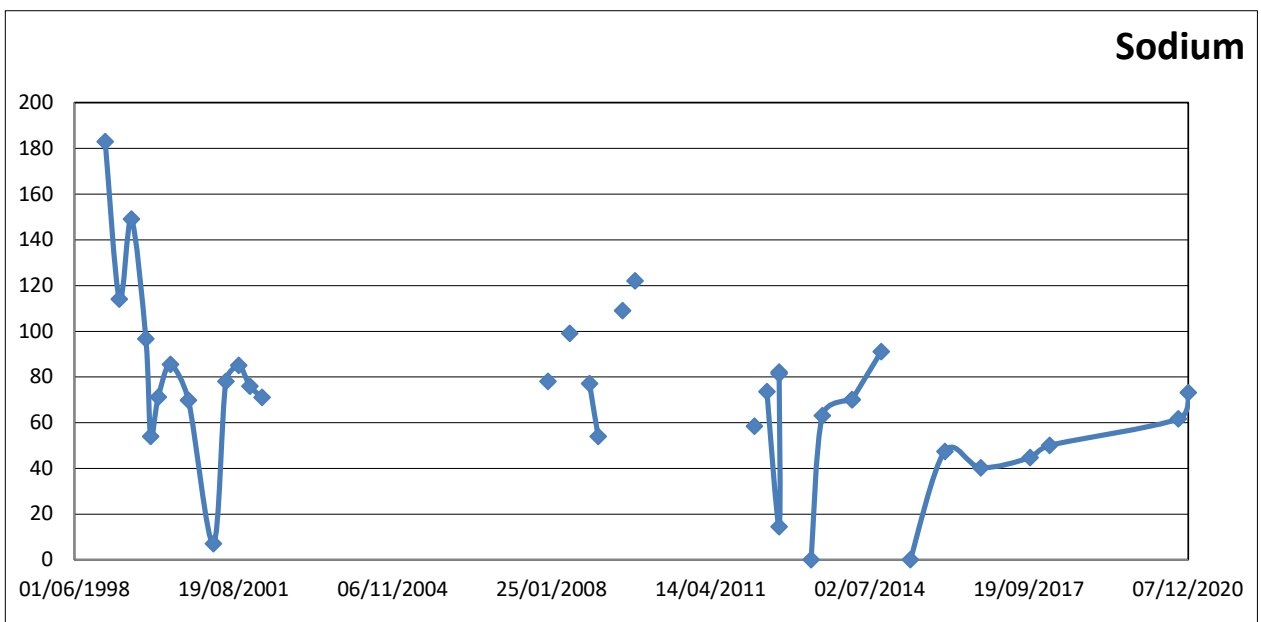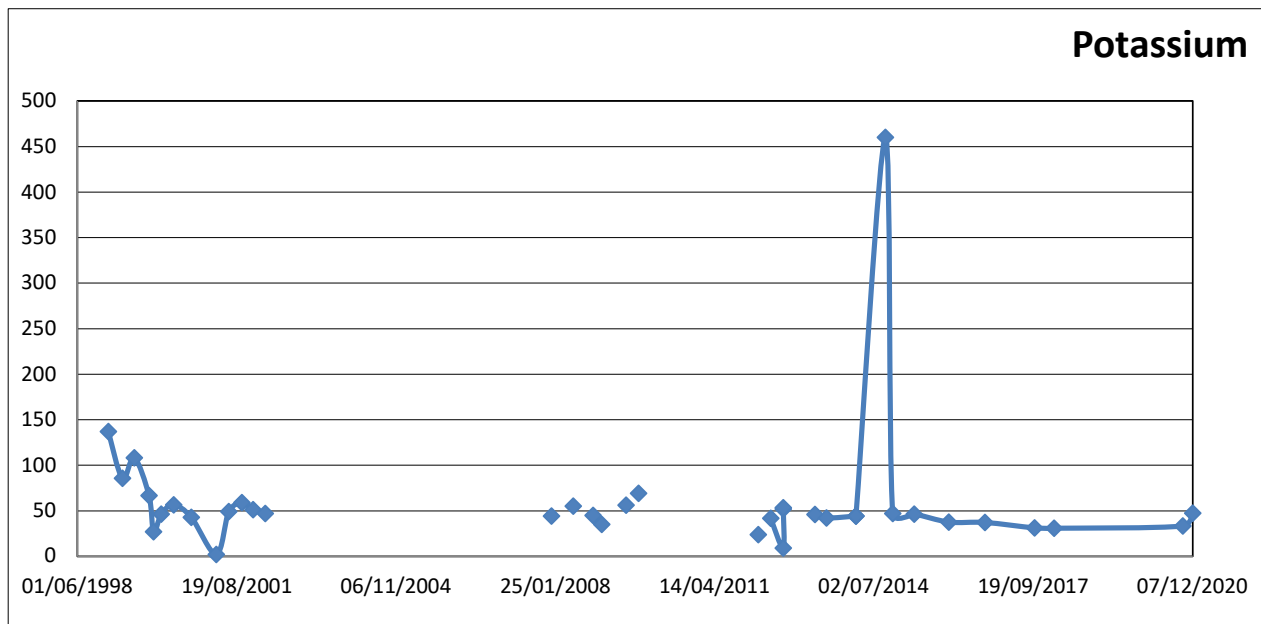

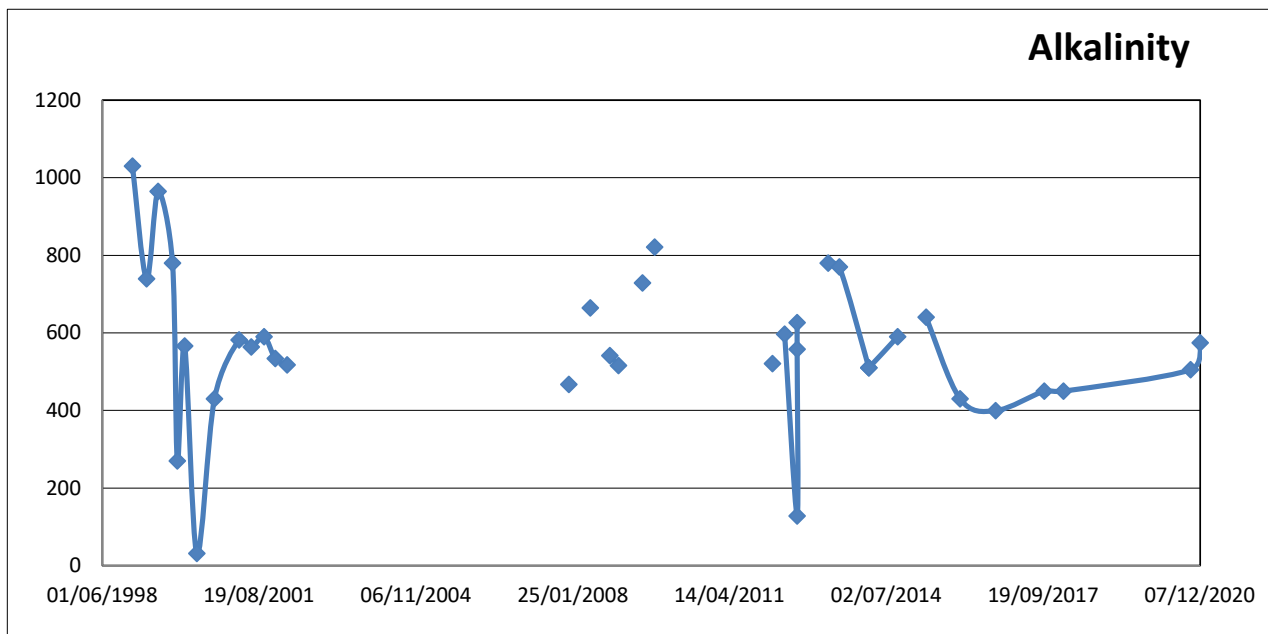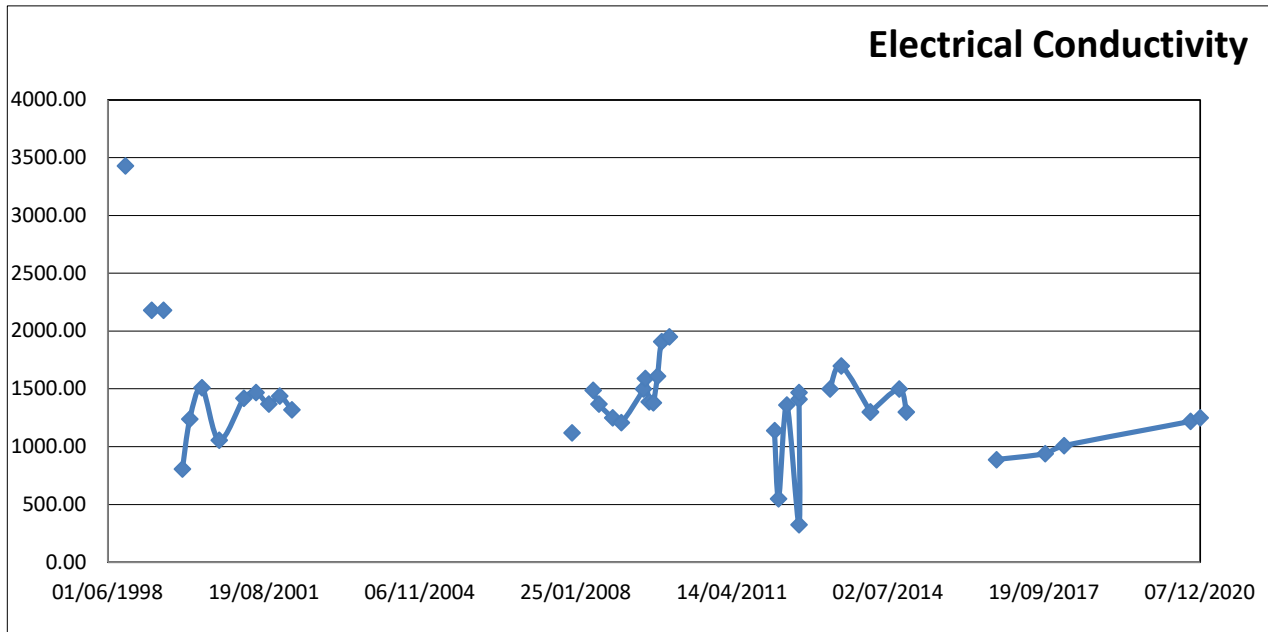




**NANT Y CAWS
PHASE 1
CLOSED LANDFILL**




**ENVIRONMENTAL
PERMIT 34183**




**2020 Annual
Environmental
Monitoring Report**




**Appendix 3
Groundwater
Chemistry**


Report Number 2119r1v1d0121

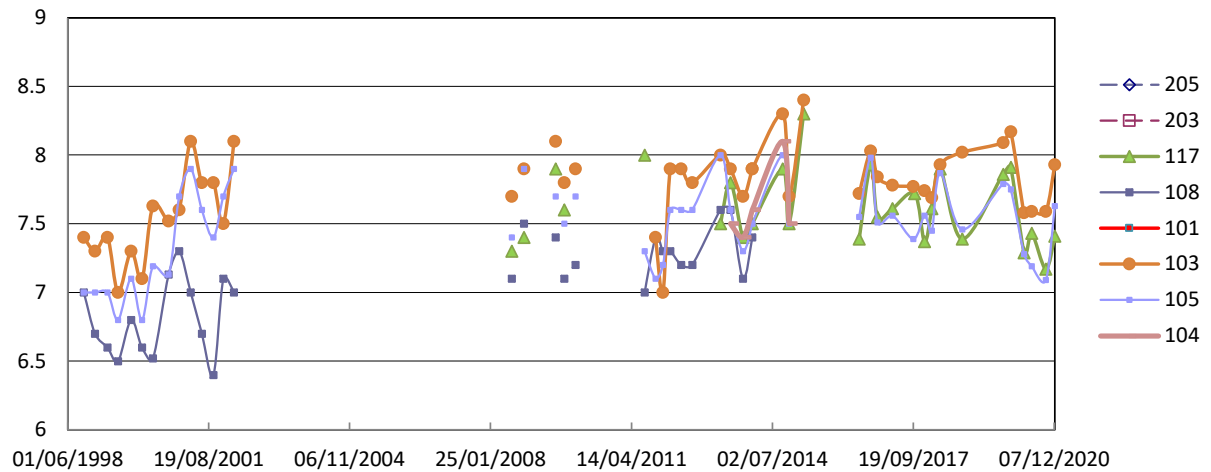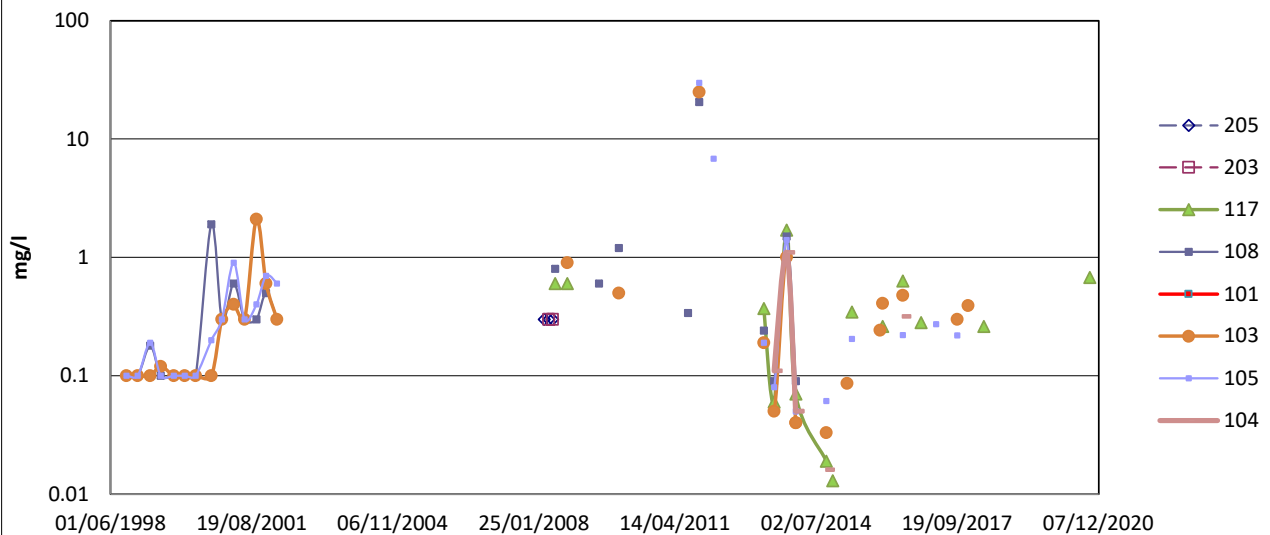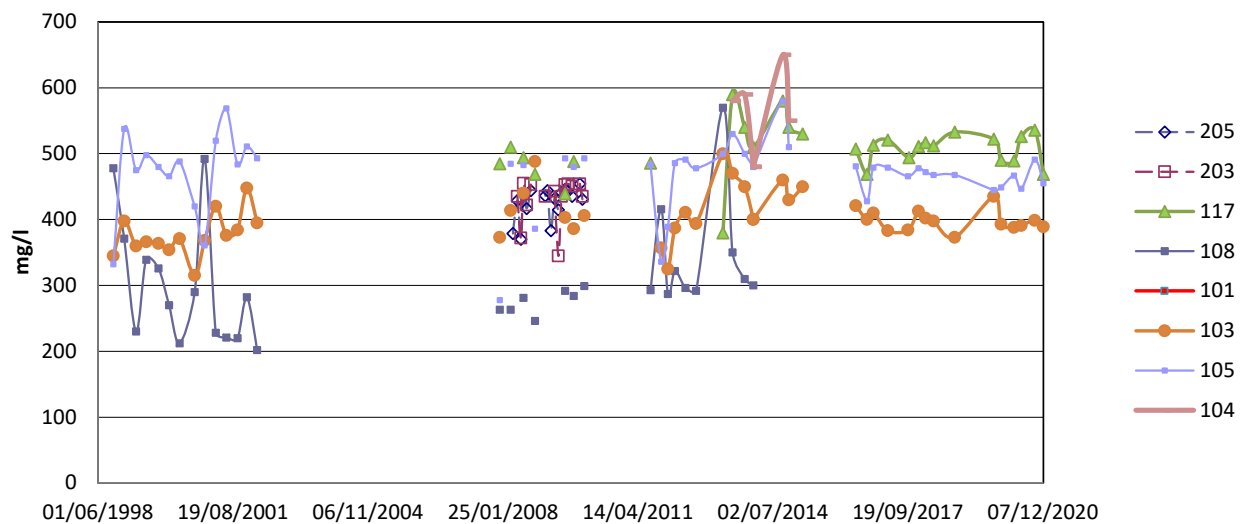pH**Ammonia****Electrical Conductivity**

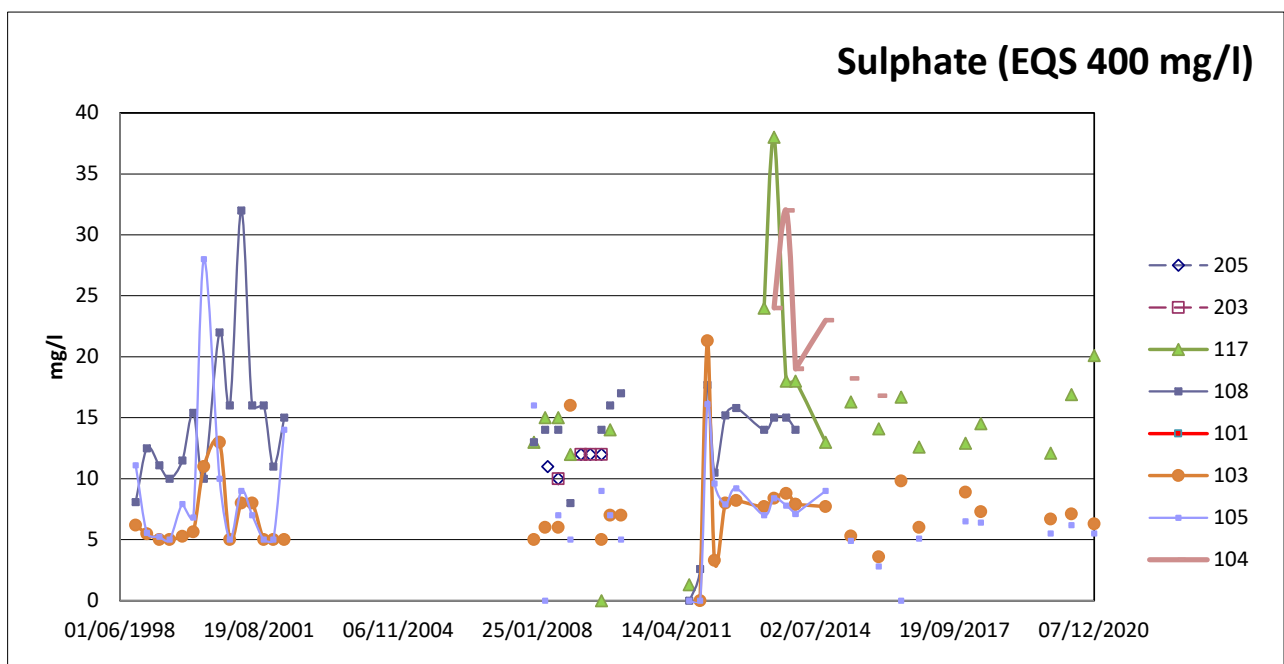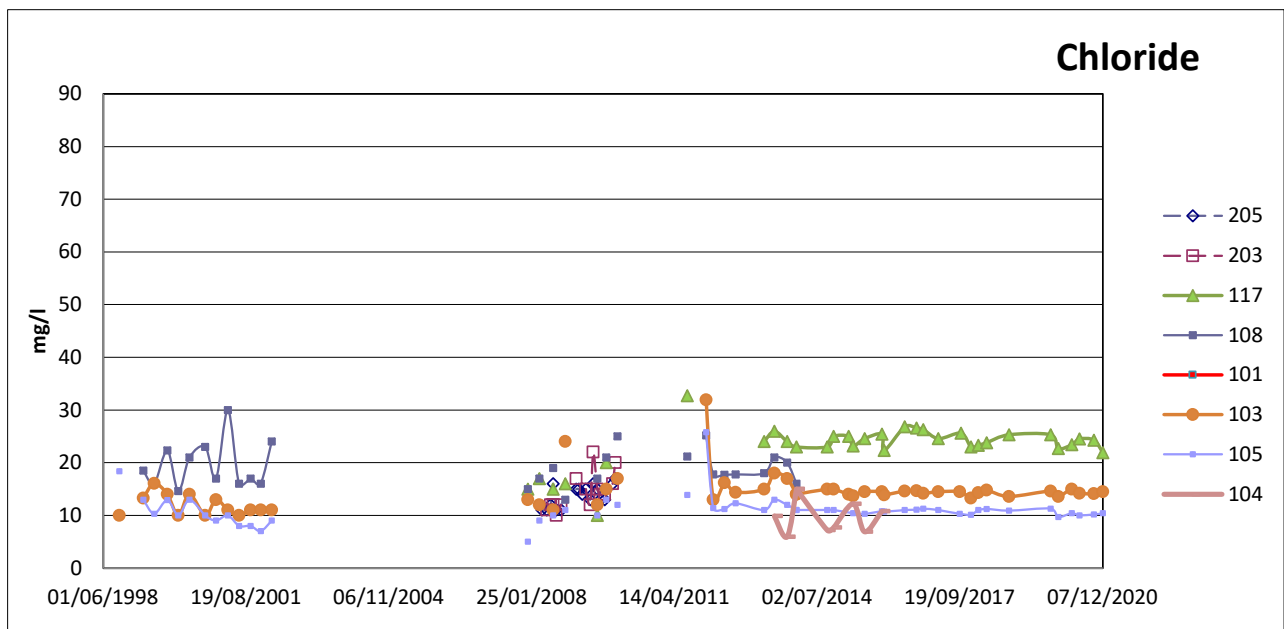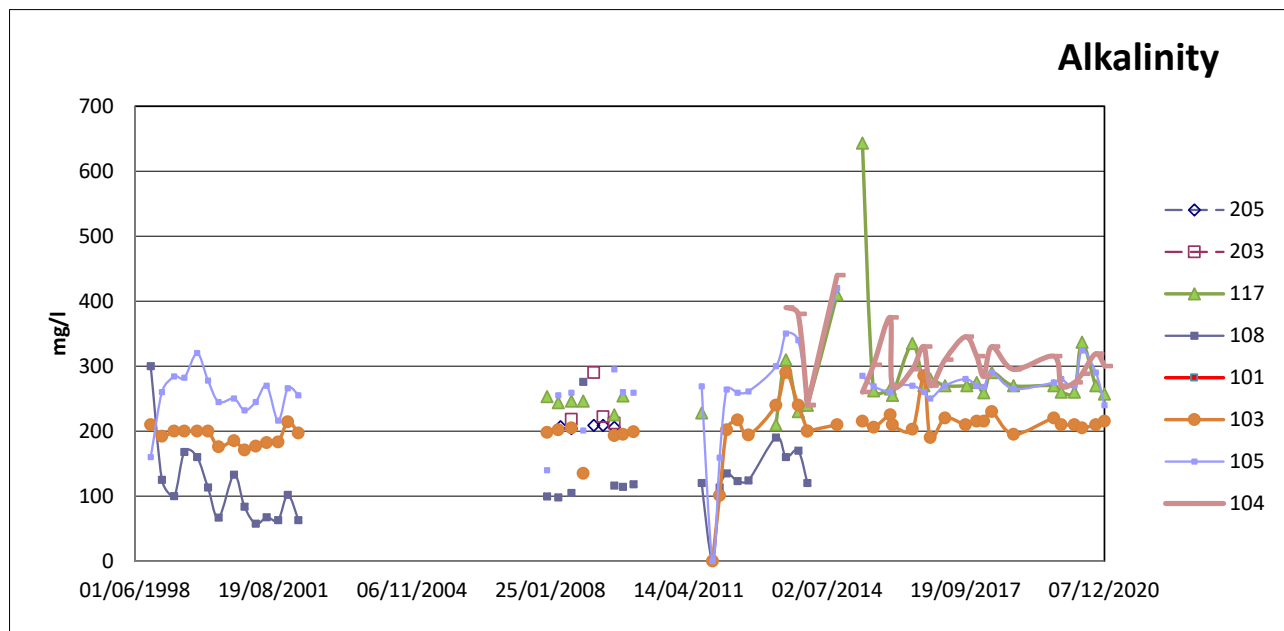

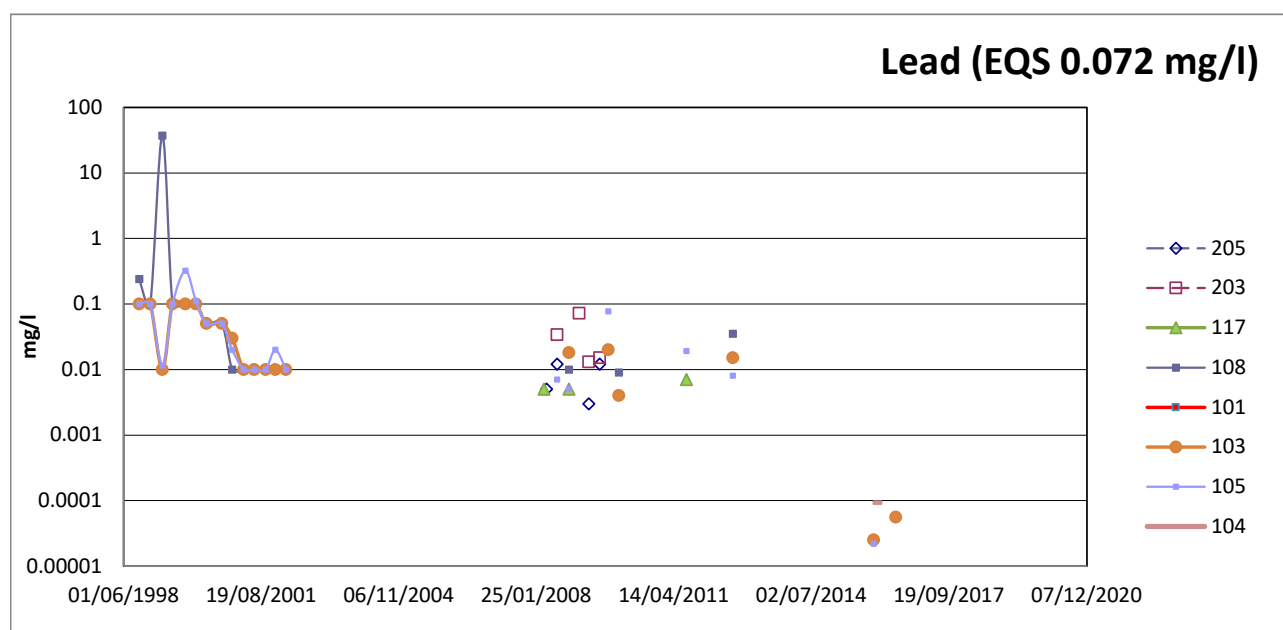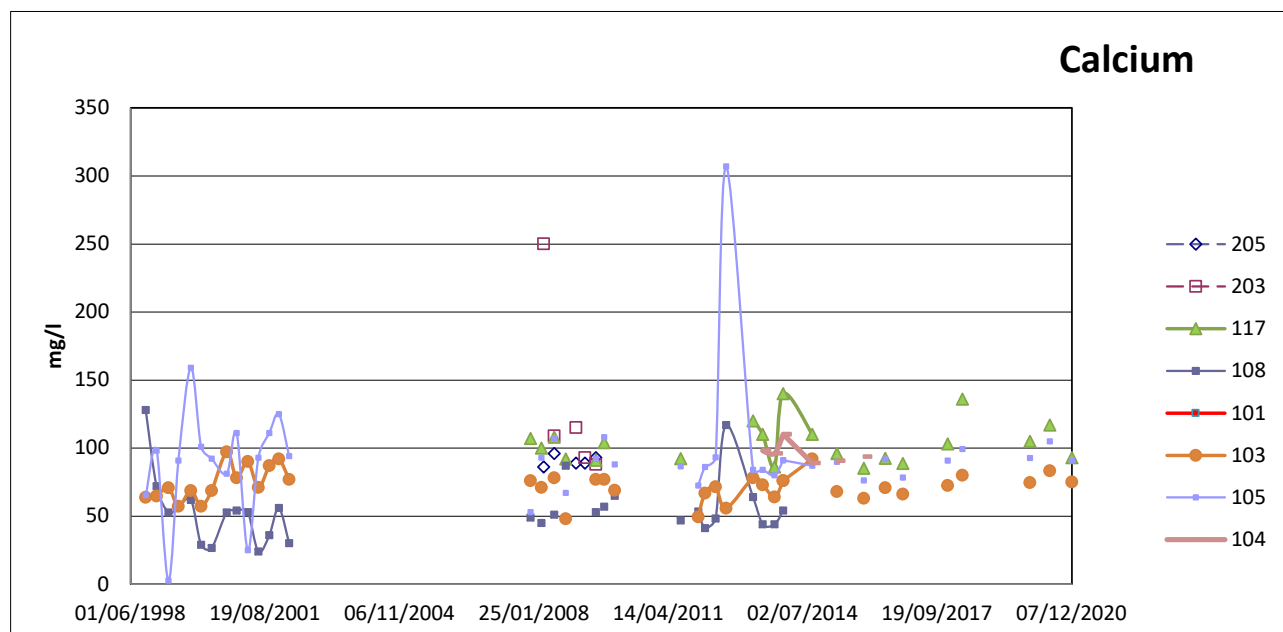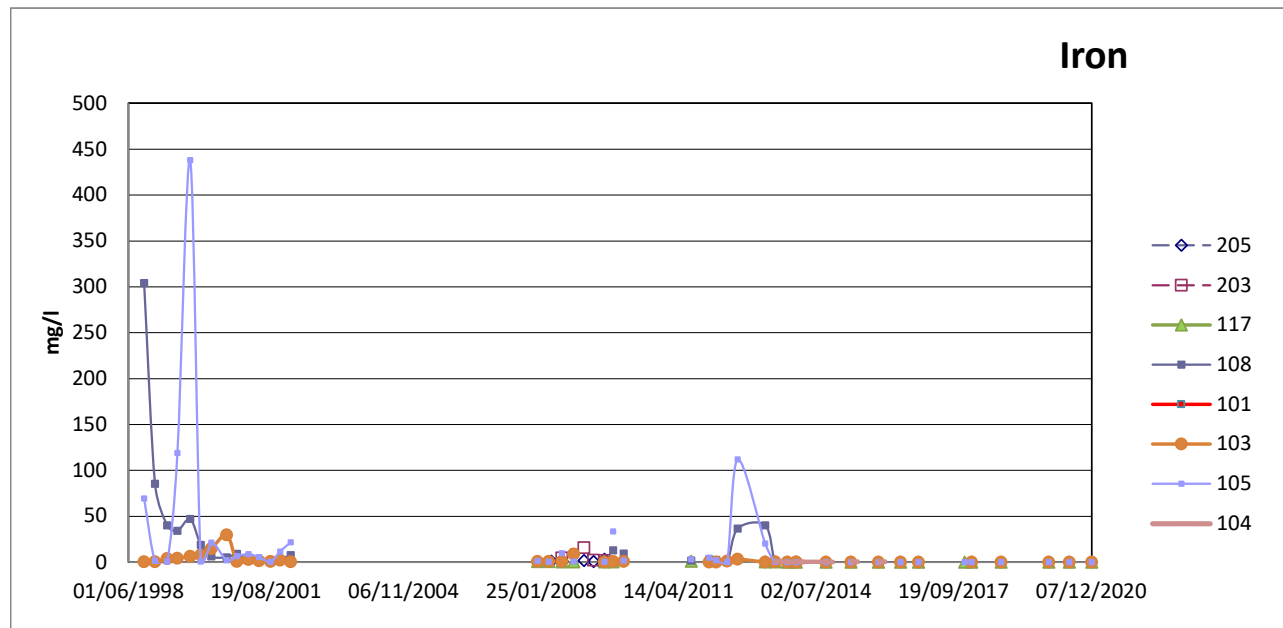

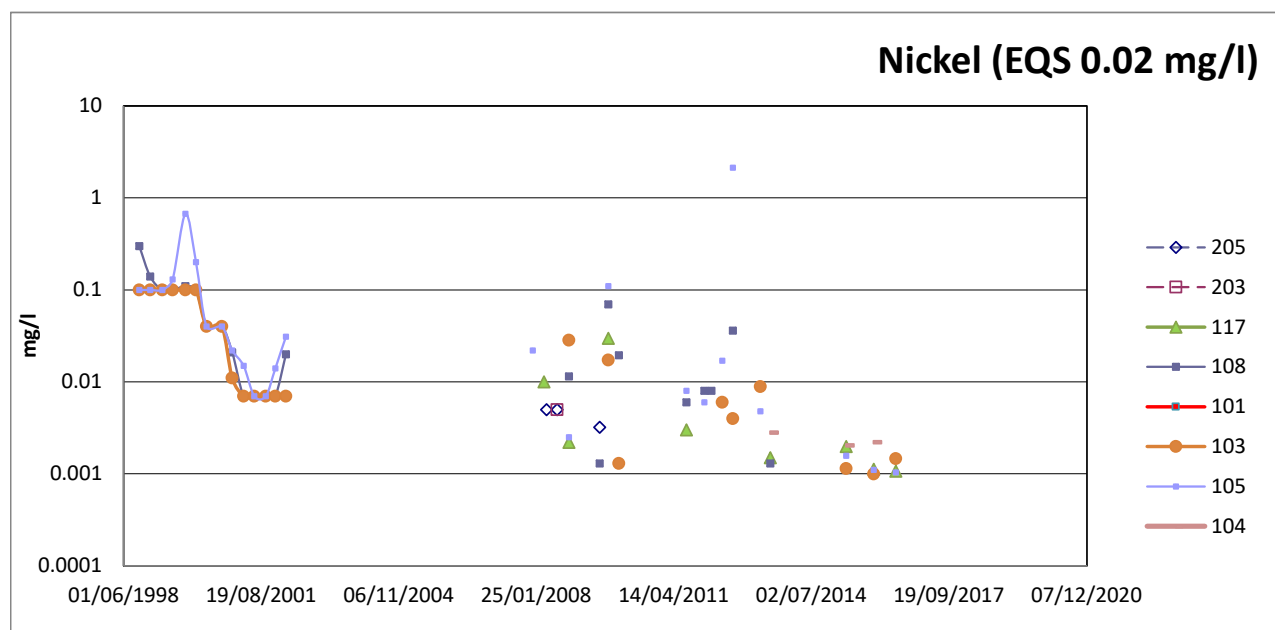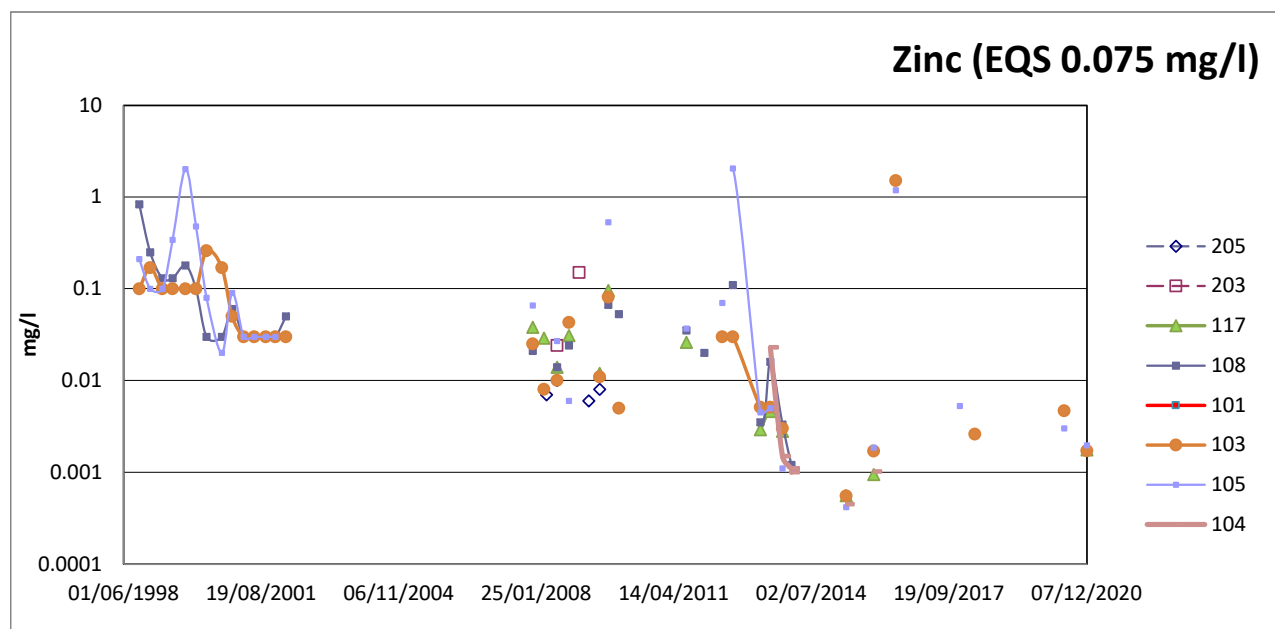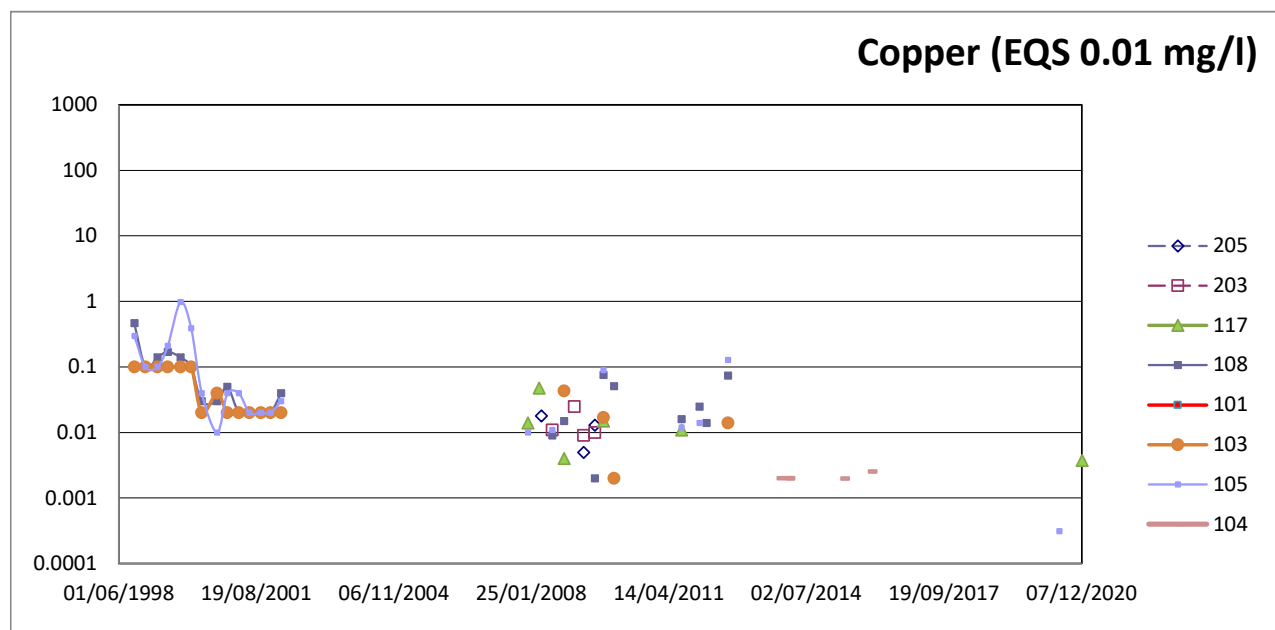

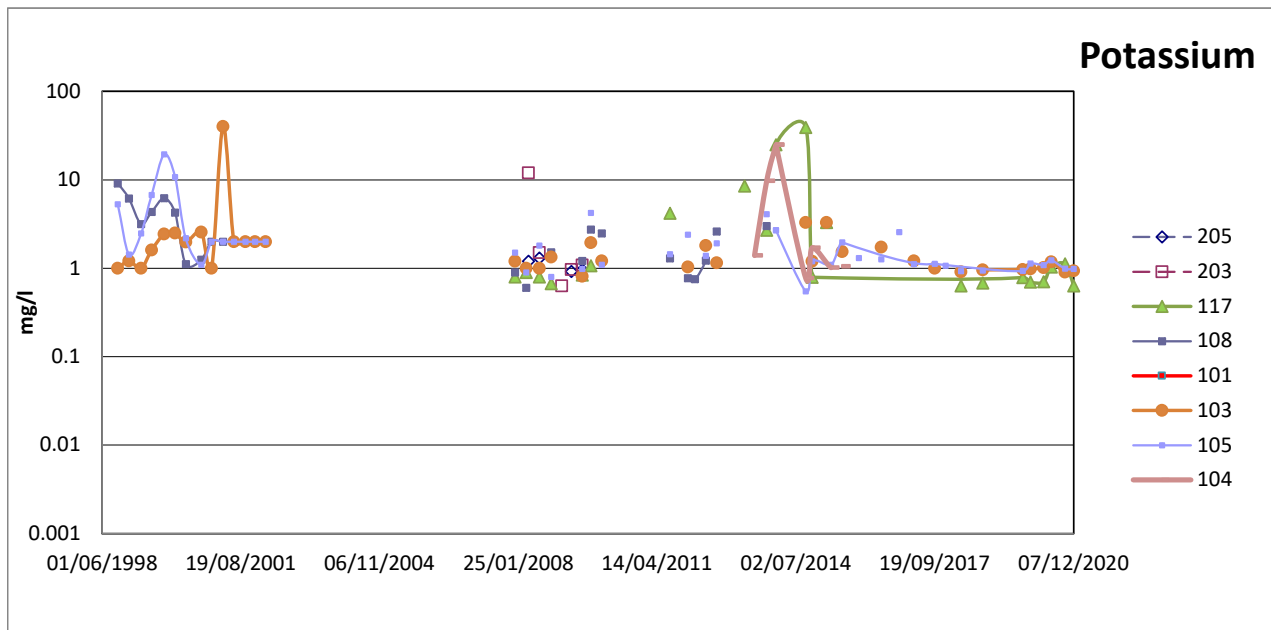




**NANT Y CAWS
PHASE 1
CLOSED LANDFILL**


**ENVIRONMENTAL
PERMIT 34183**

**2020 Annual
Environmental
Monitoring Report**

**Appendix 4
Surface Water
Chemistry**

Report Number 2119r1v1d0121

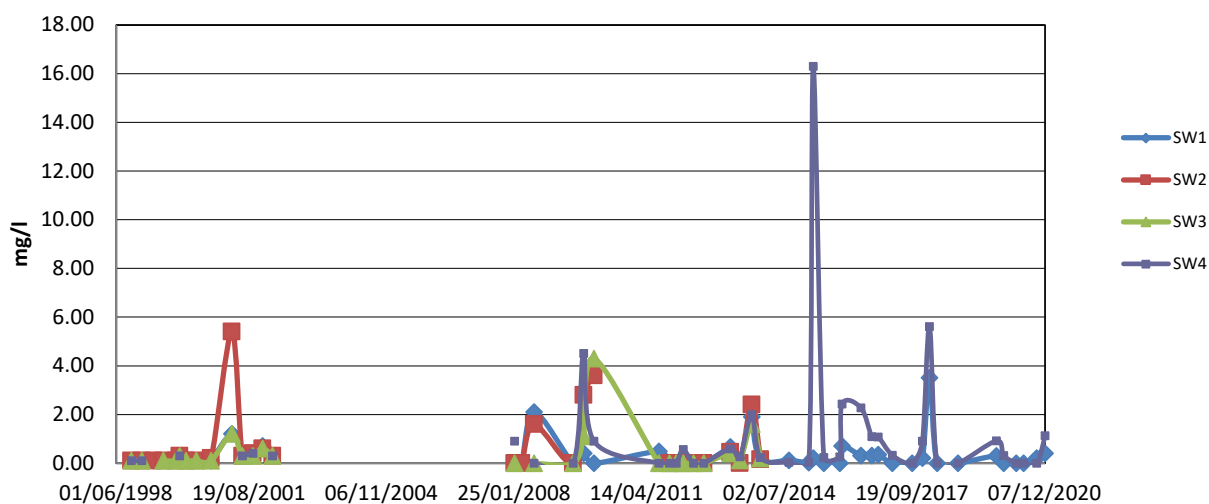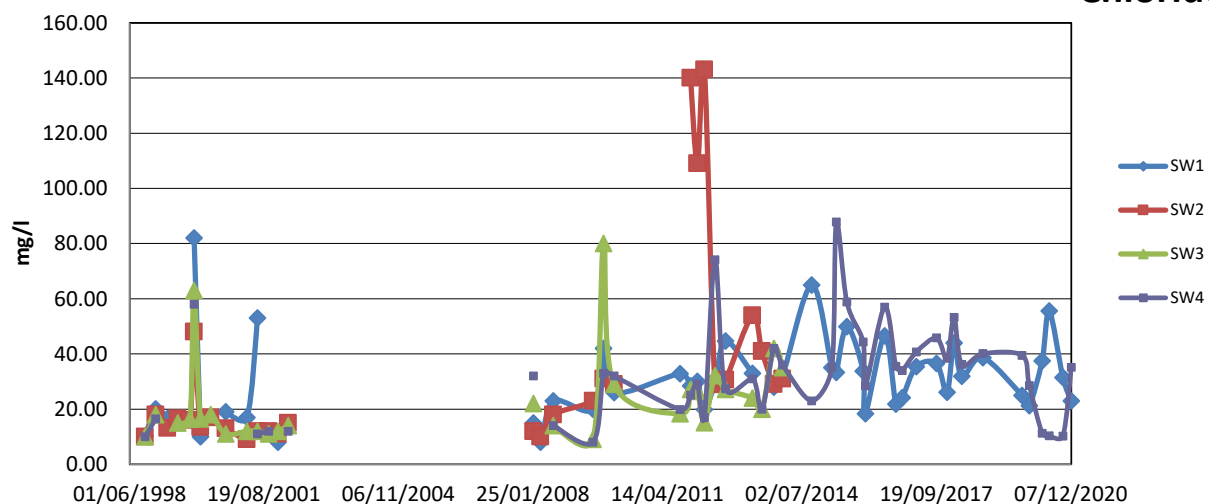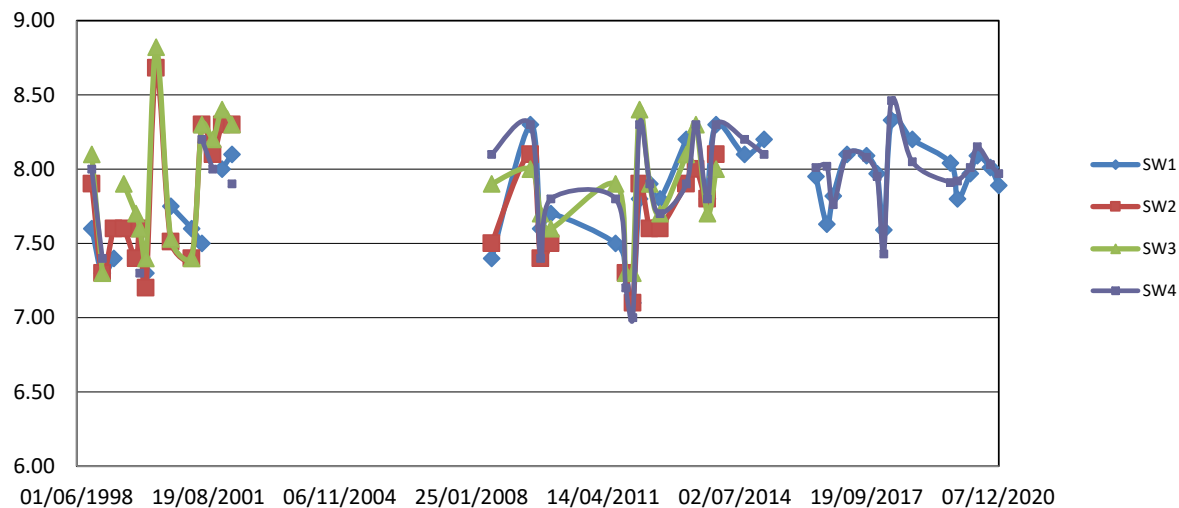Ammonia**Chloride****pH**

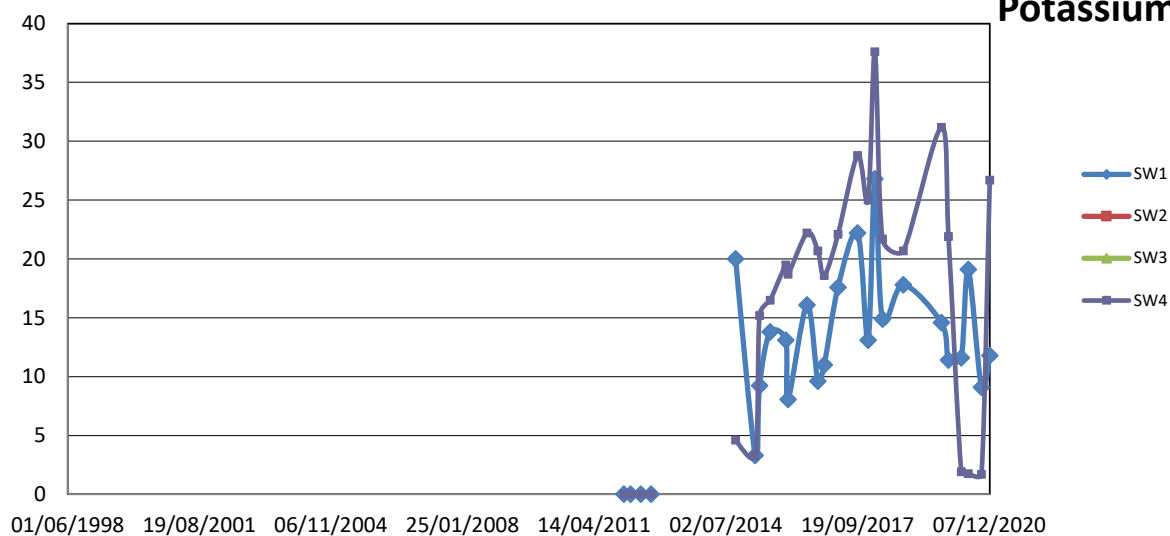
Potassium

**NANT Y CAWS
PHASE 1
CLOSED LANDFILL**

**ENVIRONMENTAL
PERMIT 34183**

**2020 Annual
Environmental
Monitoring Report**

**Appendix 5
Isopachyte of
Topographic Surface**
Report Number 1989r1v1d0120

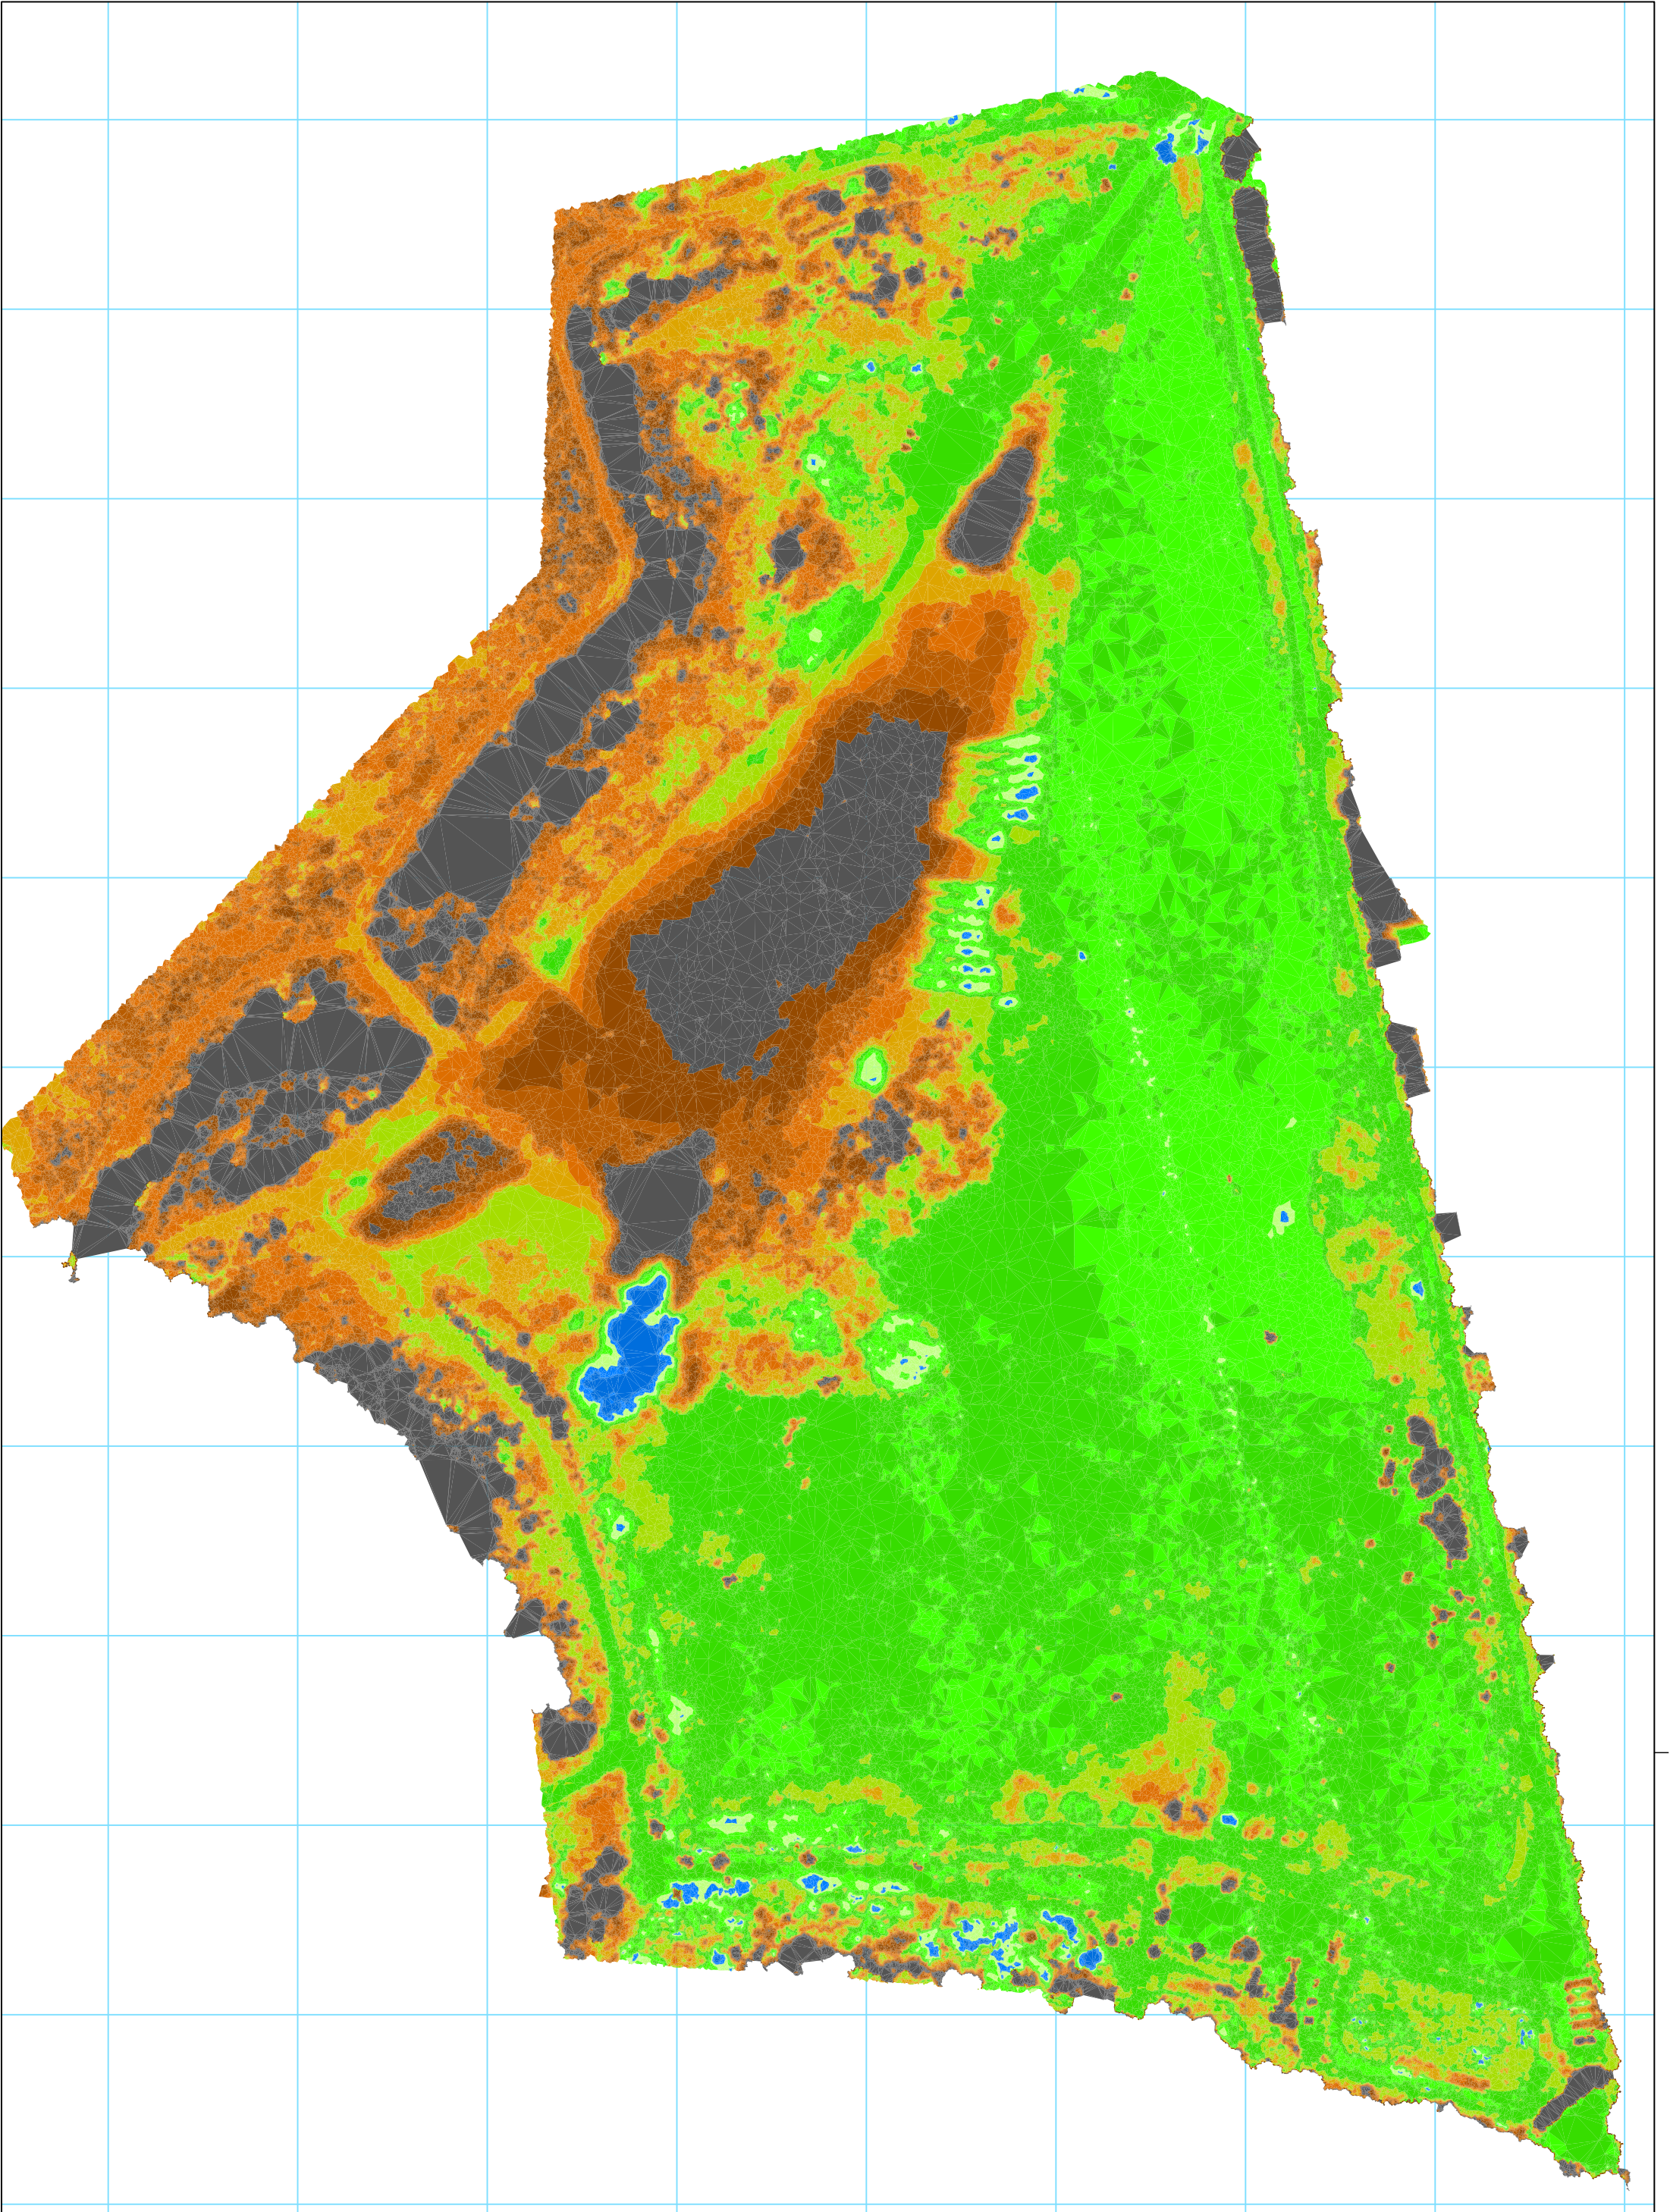

			Legend Fill Levels 2.4 2.0 1.6 1.2 0.8 0.4 0.0 Cut Levels 0.0 -0.4 -0.8 -1.2 -1.6 -2.0 -2.4 FILL - 2019 > 2015 CUT - 2015 > 2019	PROJECT Nantycaws Annual Topographic Survey - 2019	NOTES Survey Imagery acquired with Yuneec H520 hexacopter on 23/09/2019. Isopachyte has been generated by subtracting the 2015 Digital Surface Model (DSM) from the September 2019 DSM. Digital surface model includes structures, vehicles and other equipment present at the time of survey. As both surface models include vegetation and structures, some areas of cut or fill on the plan are likely the result of changes in these features between the two surveys.	NOTES	DRAWING NUMBER 1952 Drawing 2 SCALE AT A1 1:750	REVISION 0 DATE 11.19 DRAWN KJT CHECKED DRAFT
Rev	Date	Status/Ammendments		TITLE Nantycaws 2019 - 2015 Drone Survey Isopachyte				
CLIENT CWM Environmental Ltd								

Geotechnology
Ty Coed, Cefn-y-rhiall,
Aberdubais, Neath
SA10 9HE
01639 775293
www.geotechnology.net



TECHNOLOGY

CWM Environmental Ltd

Geotechnology
Ty Coed, Cefn-y-nallt,
Aberdubus, Neath
SA10 8HE
01639 775293
www.geotechnology.net



**NANT Y CAWS
PHASE 1
CLOSED LANDFILL**

**ENVIRONMENTAL
PERMIT 34183**

**2020 Annual
Environmental
Monitoring Report**

**Appendix 6
Soil Capping
Investigation**

Report Number 1989r1v1d0120

**SOIL THICKNESS
INVESTIGATION
PHASE 1 NANTYCAWS
LANDFILL**

Soil Thickness Report

Report Number 2120r1v1d0121

Commissioned by

CWM Environmental Limited
Head Office
Nantycaws Recycling Centre
Llanddarog Road
Nantycaws
Carmarthen
Carmarthenshire
SA32 8BG



JANUARY 2021

Table of Contents

1	INTRODUCTION	1
1.1	Scoping and Objective of the Investigation	1
1.2	Site Description	1
1.3	Other Information	1
2	INVESTIGATION DETAILS	2
2.1	Survey Plan Interrogation	2
2.2	Trial Pitting	2
2.3	Survey	2
2.4	Data Analysis	2

List of Figures

Figure 1	Site Location Plan
Figure 2	Site Plan and Trial Pit Locations
Figure 3	Soil Isopachyte

List of Appendices

Appendix 1	Trial Pit Photographs
Appendix 2	Trial Pit Data Summary

1 INTRODUCTION

1.1 Scoping and Objective of the Investigation

Geotechnology Limited (Geotechnology) has been commissioned by Cwm Environmental Ltd. (Cwm) to carry out a soil thickness investigation on the closed Phase 1 Landfill at Nantycaws in Carmarthenshire.

Cwm is evaluating the potential to place a number of solar panels on the surface of Phase 1. The thickness of the restoration soil is important in establishing any potential issues involved in placement of the panels.

1.2 Site Description

Carmarthenshire County Council (CCC) maintains Nantycaws (NYC) Phase I Landfill which is located east of Carmarthen and west of Cross Hands at National Grid Reference 247170 217170. It covers a site area of 11.14Ha or 111,400m² and currently ranges in elevation between 114m and 141m Ordnance Datum (see Figure 1).

The landfill is in Aftercare and has not accepted waste since March 1997. The landfill has been partially restored, with a full FML (Flexible Membrane Liner) placed over the capped area. The site is regulated by Natural Resources Wales (NRW) through Permit No. EA WML 34183.

Phase 1 of the landfill lies on the northern slope of the Bantwen Valley and is essentially a landraise, as opposed to a void in-fill, as is the case with the majority of landfills. The landfill comprises a plateau area, which possesses grades of between 1:13 and 1:22 with the flanks having grades of 1:6.5 on the southeastern side and 1:3 to 3.5 on the southwestern. The northern flank slopes at 1:5.

1.3 Other Information

Cwm Environmental Ltd has directly commissioned Geotechnology Ltd. (Geotechnology) to complete the soil thickness investigation.

The following parties are involved in the project:

- Client - Cwm Environmental Ltd.
- Report Authors - Geotechnology Ltd.

2 INVESTIGATION DETAILS

The investigation has comprised the following elements;

- Survey Plan interrogation to evaluate location of investigatory Trial Pits
- Undertake the excavation of 21 Trial Pits (TP) to establish restoration soil thickness only
- Survey each TP location at surface and at the (identified) liner level
- Evaluation of data and compilation of soil isopachyte

2.1 Survey Plan Interrogation

Cwm provided Geotechnology with detailed drawings of the existing landfill gas extraction system present in Phase 1 and operated by Infinis Ltd. The drawing was referenced "5620-GI08- Nant-y-Caws – Gas Infrastructure Plan 2014".

This plan was interrogated to establish safe locations away from gas pipes and manifolds where trial pits could be safely excavated. Geotechnology compiled a co-ordinate list of 21 locations to set out on site. The 21 locations were spread across the whole of the Phase 1 plateau area.

2.2 Trial Pitting

Following submission of method statements and acquisition of Cwm permits, the Trial Pit investigation was carried out on 2 July 2020.

A tracked backhoe excavator was provided by Cwm to undertake the work. A total of 21 trial pits were excavated and backfilled. Trial Pits were terminated, where feasible, above the HDPE liner within the thin drainage stone layer.

Photographs of each Trial Pit are included in Appendix 1 and a summary of the soil thicknesses encountered is provided in Appendix 2.

2.3 Survey


The instrument used to survey the Trial Pit locations was a Topcon GR3 differential global positioning system (dGPS) able to resolve to 15mm. All co-ordinates and levels obtained are to Ordnance Survey.

At each Trial pit location the ground surface and the base of pit (liner level) elevation was acquired.


2.4 Data Analysis

The survey data acquired was used to generate two separate surfaces using ground modelling software. The surfaces have been used to create a soil isopachyte (thickness) across the Phase 1 area. A copy of this isopachyte plan is included as Figure 3.

Figure 1 Site Location Plan

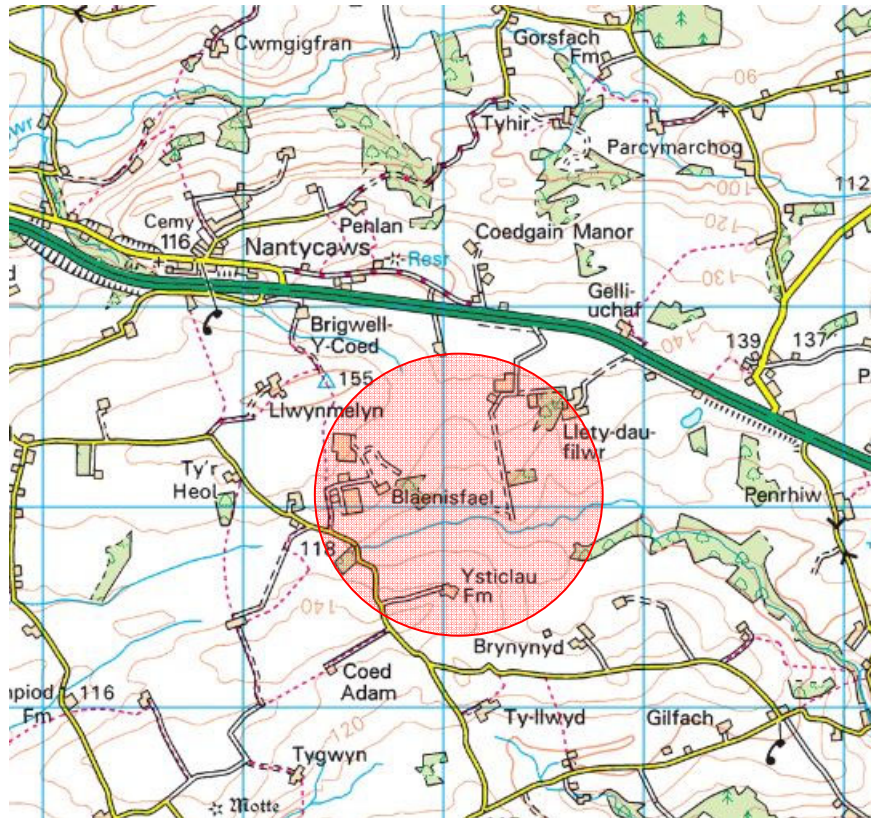

Reproduced from the Ordnance Survey Land Ranger Map
with the permission of The Controller of Her Majesty's Stationery Office
© Crown Copyright. Geotechnology SA10 8HE Licence No 100018015

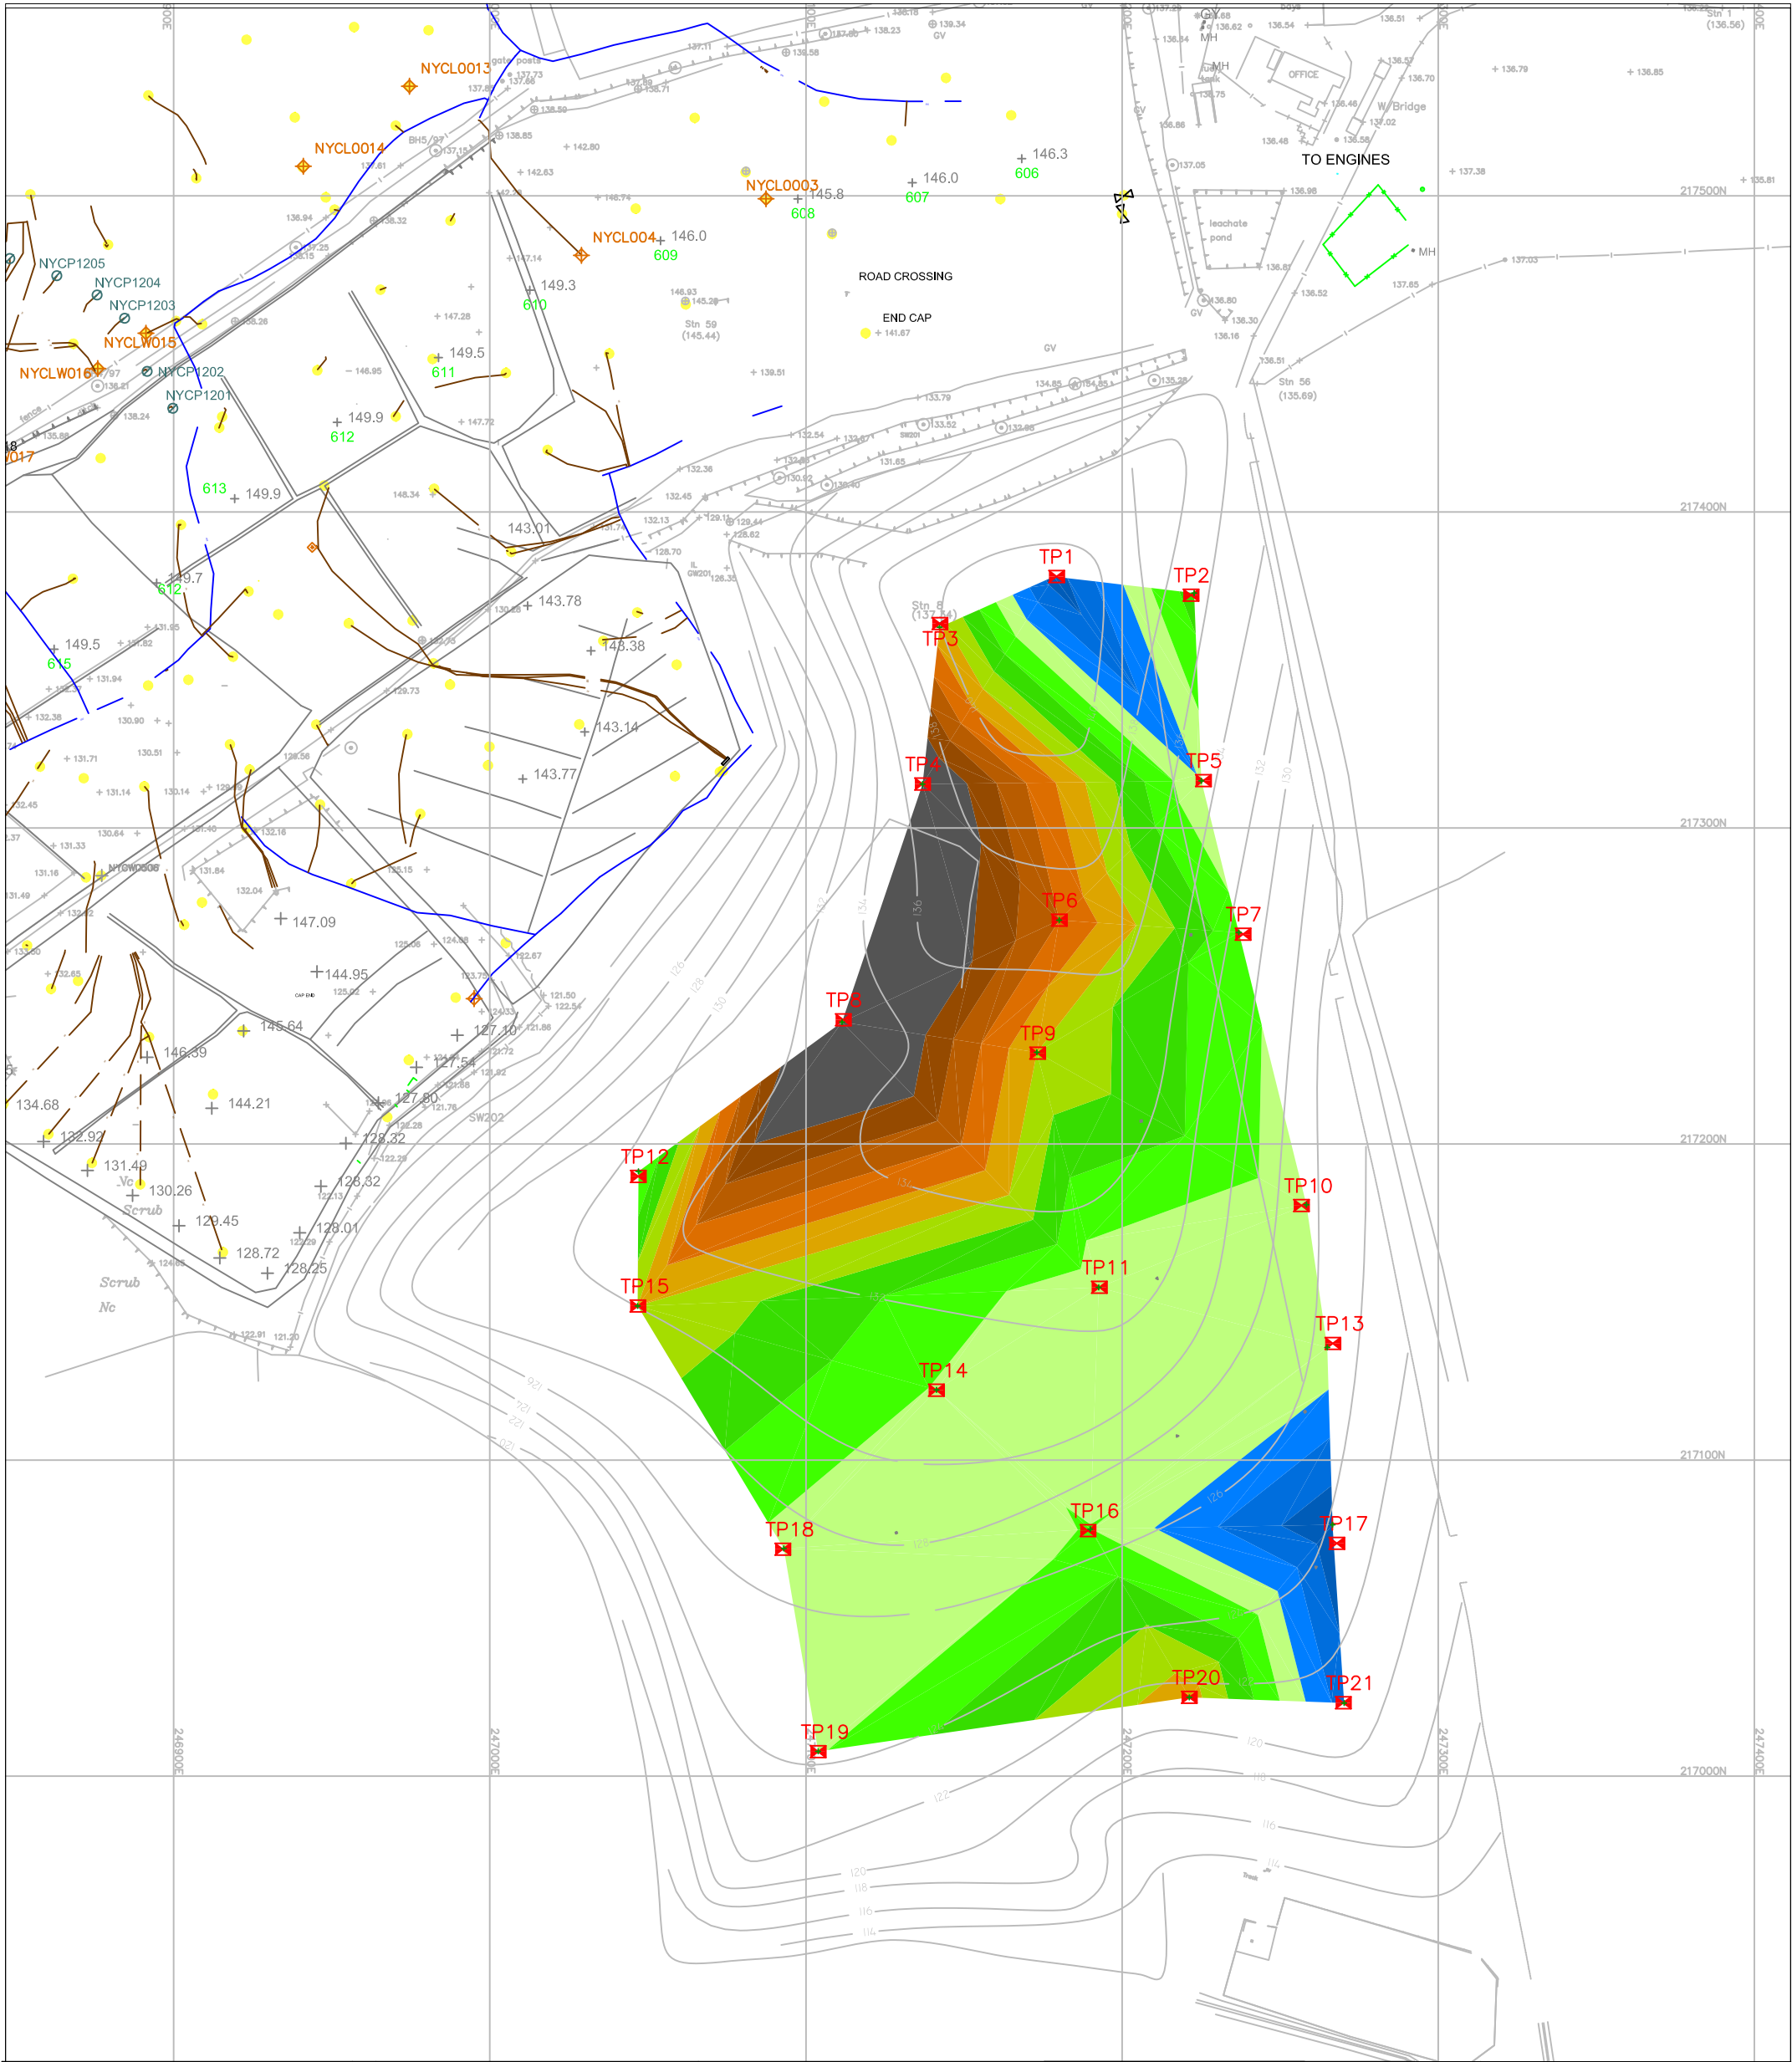

Drawing Number 2120/3		Height ranges (m)		Height ranges (m)		CLIENT CWM ENVIRONMENTAL LTD		Rev	Date	Status/Ammendments	
LEGEND TP9 ☒ Trial Pit No. and Location		2.40		1.00		PROJECT SOIL THICKNESS INVESTIGATION PHASE 1 NANTYCAWS LANDFILL		DRAWING NUMBER 2120/3		REVISION 0	
		2.20		0.80		SCALE AT A3 As Shown		DATE 01.21	DRAWN AWJ	CHECKED	
		2.00		0.60		TITLE SOIL ISOPACHYTE		Geotechnology Ty Coed, Cefn-yr-Allt, Aberdulais, Neath SA10 8HE 01639 775293 www.geotechnology.net		GEO TECHNOLOGY	
		1.80		0.40							
		1.60		0.20							
		1.40		0.00							
		1.20									

**SOIL THICKNESS
INVESTIGATION
PHASE 1
NANTYCAWS
LANDFILL**

Soil Thickness Report

**Appendix 1
Trial Pit Photographs**

Report Number 2120r1v1d0121



TP1 Excavation



TP2 Excavation



TP3 Excavation



TP4 Excavation



TP5 Excavation



TP6 Excavation



TP7 Excavation



TP8 Excavation



TP9 Excavation



TP10 Excavation



TP11 Excavation



TP12 Excavation



TP13 Excavation



TP14 Excavation



TP15 Excavation



TP16 Excavation



TP17 Excavation



TP18 Excavation



TP19 Excavation



TP20 Excavation



TP21 Excavation

**SOIL THICKNESS
INVESTIGATION
PHASE 1
NANTYCAWS
LANDFILL**

Soil Thickness Report

**Appendix 2
Trial Pit Data Summary**
Report Number 2120r1v1d0121

NANT-Y-CAWS PHASE 1 - SOIL THICKNESS - TRIAL PIT SUMMARY

Trial Pit Number	Eastings	Northings	Trial Pit Surface Elevation AOD	Trial Pit Base Elevation AOD	Depth (m) to liner (Soil Thickness)
1	247179.27	217379.58	139.34	139.03	0.30
2	247221.79	217373.67	136.29	134.99	1.31
3	247142.22	217364.59	138.75	137.08	1.68
4	247136.87	217313.90	135.63	132.93	2.70
5	247225.70	217315.03	134.31	133.50	0.81
6	247180.09	217270.84	135.60	133.60	2.00
7	247238.08	217266.71	131.04	129.97	1.07
8	247111.42	217238.58	133.52	130.52	3.00
9	247173.03	217229.01	133.64	132.04	1.60
10	247256.89	217180.58	127.55	126.68	0.87
11	247192.74	217154.76	130.07	129.22	0.85
12	247046.90	217189.78	129.16	128.16	1.00
13	247266.66	217136.93	125.55	124.57	0.98
14	247141.17	217121.85	128.69	127.70	0.98
15	247046.77	217148.77	127.95	126.35	1.60
16	247188.67	217077.65	125.00	123.99	1.00
17	247267.78	217073.66	122.78	122.54	0.24
18	247091.49	217070.47	125.07	124.14	0.93
19	247103.79	217006.99	122.54	121.56	0.98
20	247221.25	217024.92	118.80	117.10	1.70
21	247269.30	217023.33	118.56	118.06	0.50



GEO
TECHNOLOGY

Geotechnical &
Environmental Services

Ty Coed
Cefn-yr-Allt
Aberdulais
Neath SA10 8HE

T 01639 775293
F 01639 779173

enquiries@geotechnology.net
www.geotechnology.net