



JNM
CIVIL ENGINEERING DESIGN CONSULTANTS

2. ALL DIMENSIONS IN METRES UNLESS STATED OTHERWISE.
3. ALL PRIVATE DRAINAGE WORKS ARE TO COMPLY WITH THE REQUIREMENTS OF BS 752 BUILDING DRAINAGE AND BUILDING REGULATIONS 2010 APPROVED DOCUMENT H 2002 EDITION, ALL ADAPTABLE DRAINAGE TO COMPLY WITH THE REQUIREMENTS OF BS 7526 TRIENT WATER AND SEWERS FOR ADOPTION (8th EDITION), INCLUDING THE RELEVANT PROVISIONS OF THE COMBINED ADDENDUM.
4. ALL MATERIALS, UNLESS SPECIFIED OTHERWISE, SHALL COMPLY WITH THE RELEVANT BRITISH STANDARD. SOURCES OF SUPPLY ARE TO BE AGREED WITH THE EMPLOYER'S REPRESENTATIVE/ENGINEER IN ADVANCE OF THE WORKS.
5. ANY DISCREPANCIES IN THE DETAILS SHOWN TO BE REPORTED TO THE EMPLOYER'S REPRESENTATIVE/ENGINEER PRIOR TO CONSTRUCTION.
6. ALL EXISTING SERVICES TO BE LOCATED PRIOR TO THE COMMENCEMENT OF ANY DRAINAGE WORKS WHERE NECESSARY PROTECTION OR DIVERSIONS TO BE UNDERTAKEN TO AVOID CONFLICT WITH THE PROPOSED WORKS.
7. TYPICAL PIPE BEDDING TO DRAINAGE WHERE DEPTH TO SOFTENING OF SUBGRADE IS 100mm OR LESS SHALL BE 100mm AND GREATER THAN 1200mm IN ADAPTABLE HIGHWAYS AND 800mm IN OTHER TRAFFICKED AREAS IS TO BE CLASS S1 (E 10-14mm) BEDDING OF GRAVELLY COMPATIBLE MATERIAL, FREE FROM RUBBISH AND ORGANIC MATTER, FROZEN SOIL, CLAY LUMPS AND LARGE STONES, TO BE COMPACTED IN LAYERS NOT EXCEEDING 150mm THICK.
8. A FLEXIBLE JOINT SHALL BE PROVIDED AS CLOSE AS IS PRACTICABLE TO THE POINT OF ENTRY TO THE STRUCTURE TO WHICH A PIPE IS BUILT, COMPATIBLE WITH THE SATISFACTORY COMPLETION AND SUBSEQUENT MOVEMENT OF THE JOINT. THE POINT OF THE NEXT PIPE (ROCKER PIPE) AWAY FROM THE STRUCTURE SHALL AS BE SHOWN IN THE TABLE BELOW.

0. THIS DRAWING IS PRODUCED FOR PLANNING PURPOSES ONLY.


1. SVP AND RWP LOCATIONS TO BE CONFIRMED PRIOR TO ANY CONSTRUCTION ON SITE

2. HYDRO-BRAKE MANUFACTURER SPEC - MD-SHE-0101-5000-1300-5000

KFY-

0. THIS DRAWING IS PRODUCED FOR PLANNING PURPOSES ONLY.
1. SVP AND RWP LOCATIONS TO BE CONFIRMED PRIOR TO ANY CONSTRUCTION ON SITE
2. HYDRO-BRAKE MANUFACTURER SPEC - MD-SHE-0101-5000-1300-5000
- KFY-

 FWS PRIVATE FOUL SEWER
 FWS PRIVATE FOUL SEWER (WITHIN SITE MAINTENANCE)

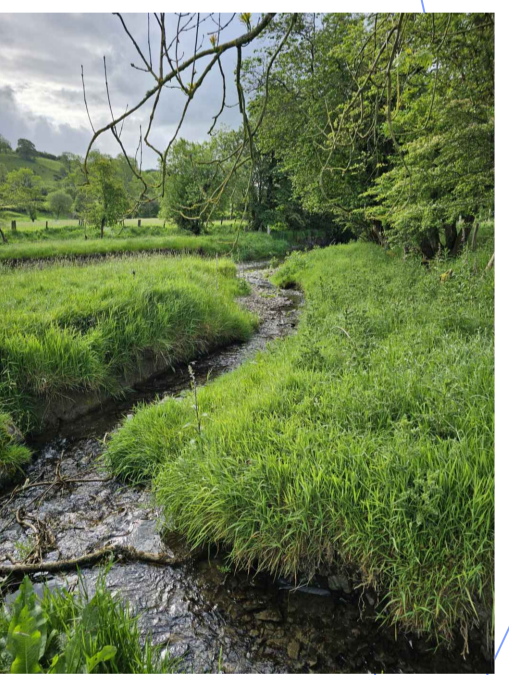

Discharge to existing stream that outfalls to River Tame. Topographical information to be confirmed. Level of top of bank and base required. Please refer to Photo 1

Drawing Number J02189/A1/009 Revision

Drawing Title

FOUL DRAINAGE
LAYOUT

www.jnmengineering.co.uk

14-16 High Street, Ironbridge
Shropshire. TF8 7AD
Tel: 01952 460653
info@jnmengineering.co.uk
Company Registration Number: 05782540