




Visit us online:
www.pumpsupplies.co.uk

Or via email:
sales@pumpsupplies.co.uk

Flygt B2250 MT/HT

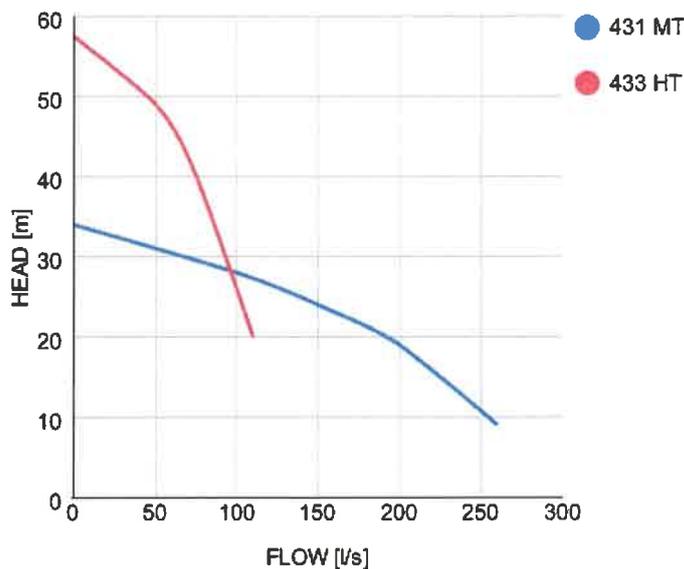

Impeller Curve	Voltage (v)	Motor (kw)	F.L.C. (amps)	Discharge (mm)	Weight (kg)	Height (mm)	Width (mm)
431	400	54	101	300/250	540	1260	940
433	400	54	101	200/150	540	1260	838

**Technical data is for guidance only; please contact your local depot for precise information*

Typical Applications:

- Construction
- Mining & Quarrying
- Dockyards
- Seawater
- Tunnelling
- Flood Alleviation
- Industry

Installation Types available:

S- Semi permanent, free standing

Impeller Type:

B- Hard-Iron impeller

Options:

Zinc Anodes

AVAILABLE FOR IMMEDIATE HIRE

Need any pipework & accessories , control equipment or require installation?

Please contact us for more information and we'll be happy to help

sales@pumpsupplies.co.uk

01452 726999

www.pumpsupplies.co.uk