



ATQ-A 1700x1350

Top view
Close

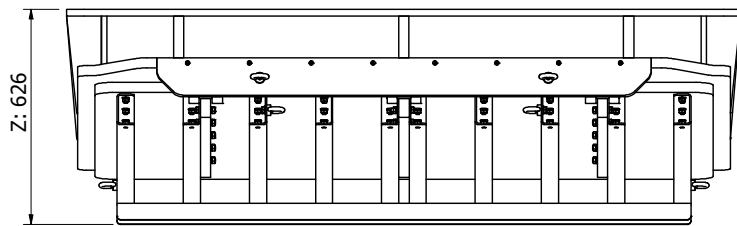

Z: 626


Front view
Close

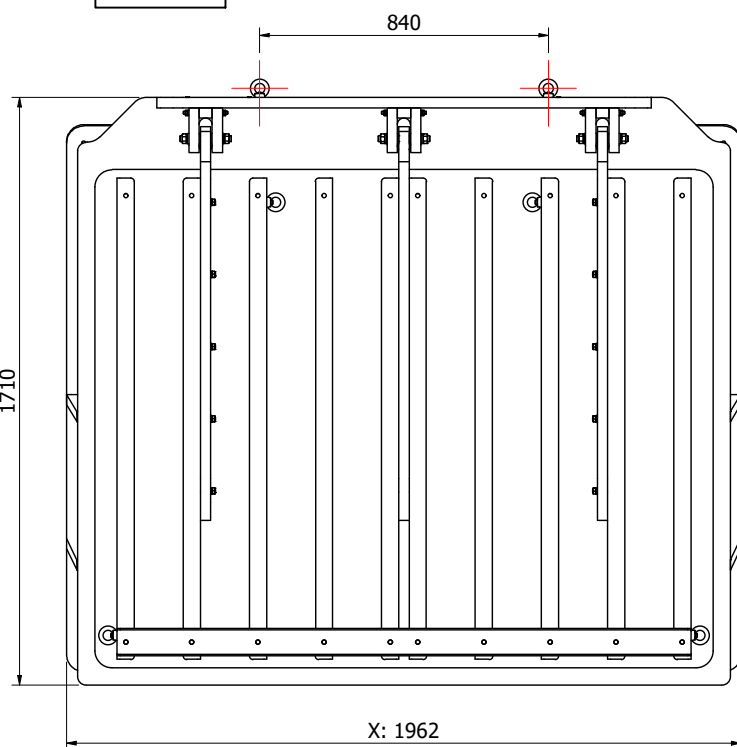

1710


X: 1962

Side view
Close

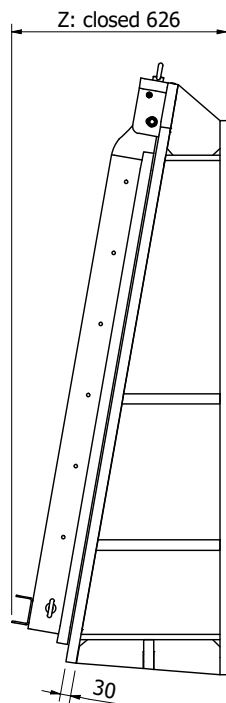

Z: closed 626

Side view
Open

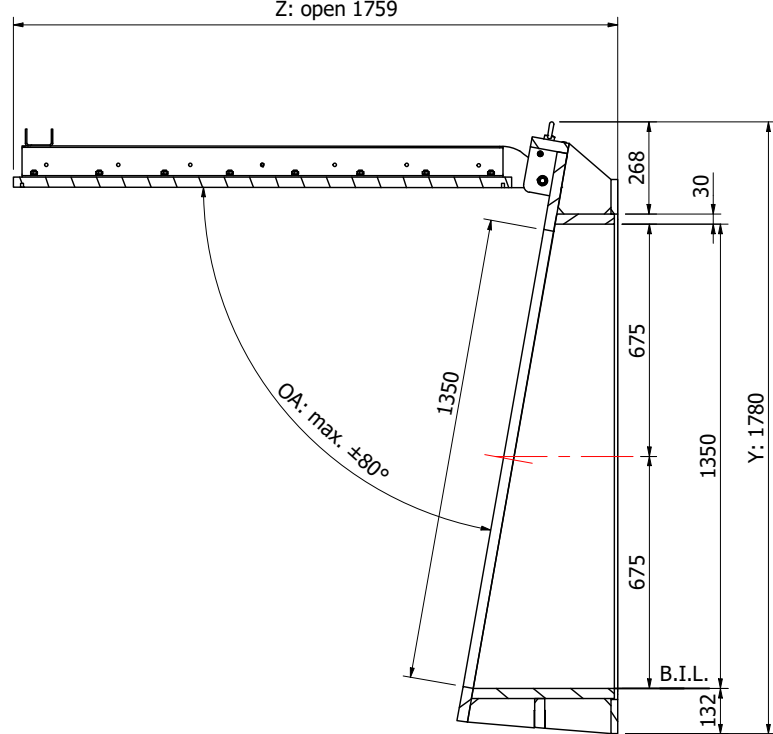


Z: open 1759

OA: max. $\pm 80^\circ$

A-A (1:22)

Back view
Close

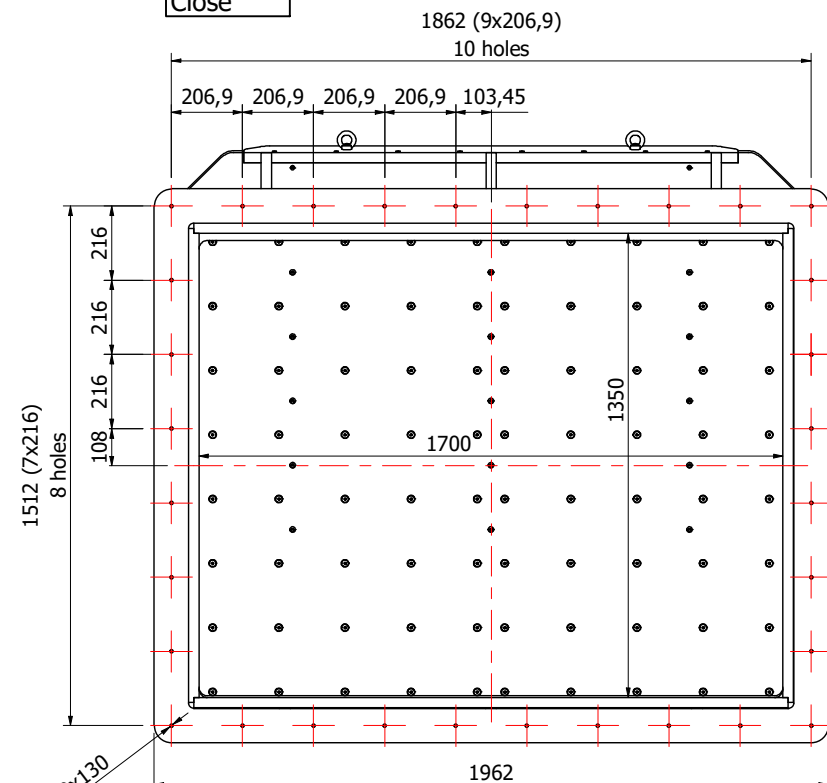

1862 (9x206,9)
10 holes

B (1:22)


Ø11 (32x)
Chemical Anchors M10x130

Linear dimensions tolerances acc. to: NEN-ISO 2768-c / Laser cut dimensions tolerances acc. to ISO 9013-1

Please refer to our installation manual for more detailed information regarding wall mounting


Signed for agreement: Name: Date:.....

The stated sizes are approximate. We advise you to measure the materials immediately after delivery before you proceed to installation!
Copyright: This drawing remains property of Aquafix Milieu B.V. Nothing of this may be reproduced or multiplied without the permission of Aquafix Milieu B.V.

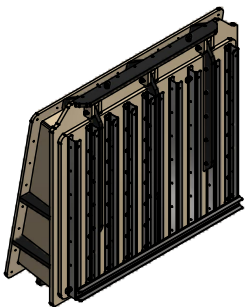

Opening: 1700x1350mm
Material: HDPE, SS316, EPDM
Max load from bottom invert level (B.I.L.)
3,35 MWC long period (= 50 years)
5.0 MWC short period (= 72hours)
Number of anchors M10x130: 32 pieces
Synthetic rubber (EPDM)
Opening Angle (OA)
All dimensions in mm.

Mounting detail

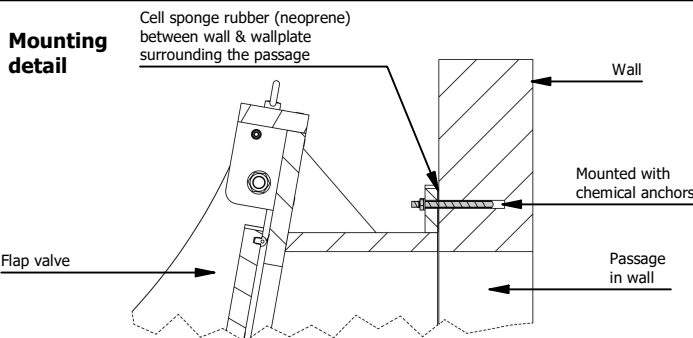

Postbus 288 3640 AG Mijdrecht
T: +31 (0)297 - 26 29 29
F: +31 (0)297 - 26 12 72
E: info@aquafix.nl
W: www.aquafix.nl

Get.: SS

Datum:

Flap valve ATQ-A 1700x1350

Model: Wallmount (A) - HDPE/SS316L

Artikelnr. 670ATQ17001350A

Order: 90758

Schaal: 1:12

Formaat: A3

Tek. nr.: AMW22015

Rev.: -

± 285 kg.

Blad: 1