

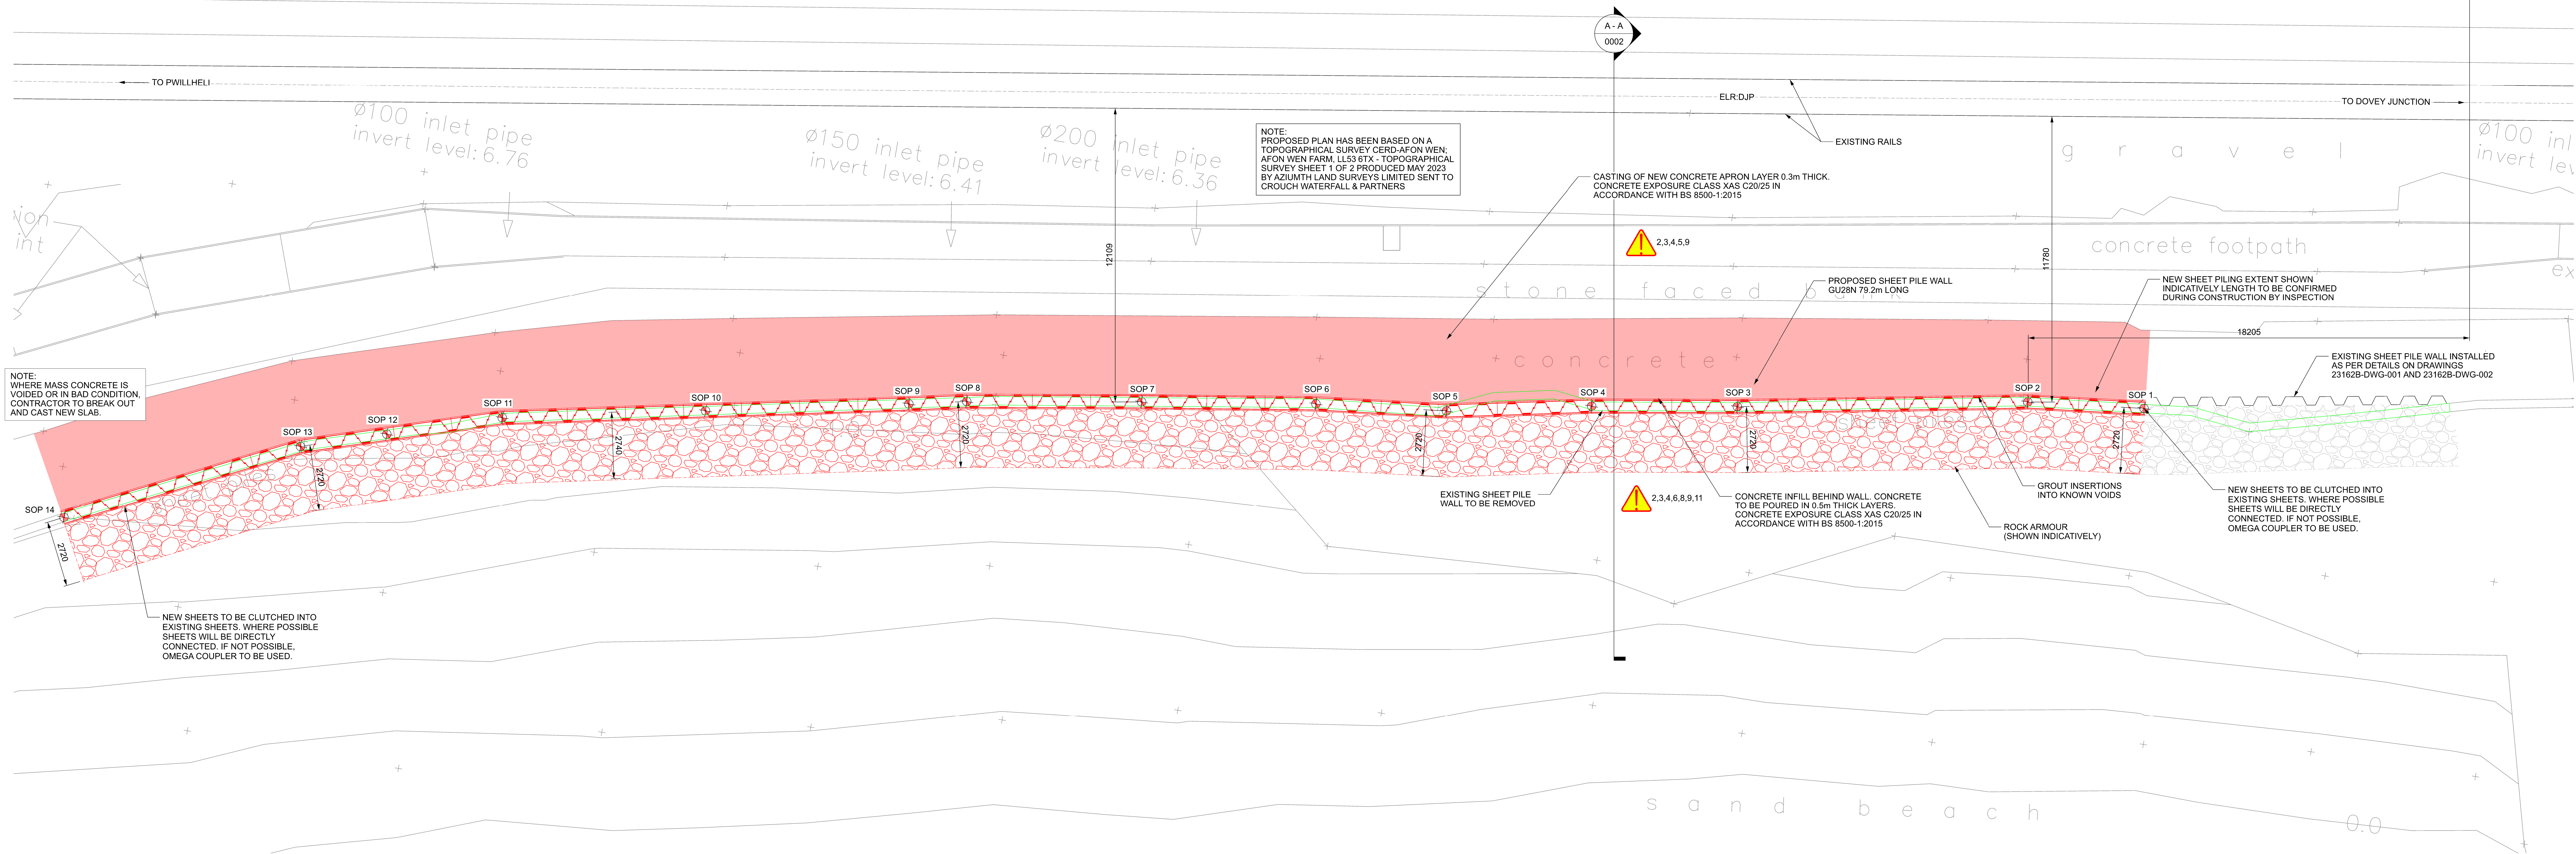




GA ON PROPOSED SHEET PILE WALL AND ROCK ARMOUR

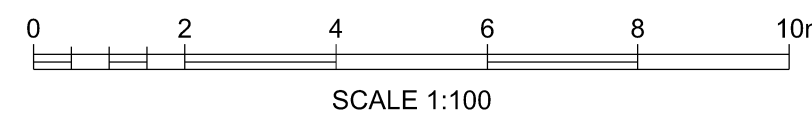


COLOUR LEGEND	
—	EXISTING OR UNCHANGES
—	MODIFIED OR MOVED
—	NEW, PROPOSED OR ADDITIONAL
—	OS OR SURVEY DATA
—	REDUNDANT OR TO BE MOVED
—	TEMPORARY WORKS

SHEET PILES SETTING OUT POINTS		
SOP REF.	EASTING - X	NORTHING - Y
SOP 1	244799.180	337180.299
SOP 2	244794.410	337179.767
SOP 3	244782.609	337177.590
SOP 4	244776.688	337176.615
SOP 5	244770.807	337175.428
SOP 6	244765.439	337174.822
SOP 7	244758.326	337173.709
SOP 8	244751.222	337172.534
SOP 9	244748.874	337172.037
SOP 10	244740.642	337170.366
SOP 11	244732.410	337168.695
SOP 12	244727.836	337167.239
SOP 13	244724.405	337166.149
SOP 14	244715.258	337161.636

REF.	RESIDUAL RISK	ACTIVITY/ELEMENT
1	UNFORESEEN GROUND CONDITION	ALL WORKS
2	WORKING IN TIDAL AREAS	ALL WORKS
3	FALL FROM HEIGHT	ALL WORKS
4	SLIPS, TRIPS AND FALLS	ALL WORKS
5	FURTHER TEMPORARY WORK DESIGN(S)	TW DESIGN
6	MOVING PLANT	ALL WORKS
7	BURIED/OVERHEAD SERVICES	EXCAVATION/LIFTING OPERATIONS
8	WORKING AT HEIGHT	ALL WORKS
9	DETIMENT TO HUMAN HEALTH	ALL WORKS
10	EXCESSIVE SETTLEMENT	PLACEMENT OF ENGINEERED FILL
11	DIFFERENTIAL SETTLEMENT	SITING OF WALL ON FOOTINGS
12	SHALLOW REFUSAL OF SHEET PILES	SHEET PILE INSTALLATION
13	CORROSION OF SHEET PILES	SHEET PILE
14	DISPLACEMENT OF SHEET PILES DURING CONCRETE BACKFILL	BACKFILLING SHEET PILE WALL
15	GROUNDWATER BEHIND SHEET PILE	SHEET PILE

- General notes
- All dimensions are in millimetres unless noted otherwise.
 - All levels are in metres above ordnance datum unless noted otherwise
 - All dimensions and levels are to be checked on site prior to any works being put in hand.
 - The contractor is responsible for the stability of the existing structure at all times during the works.
 - This drawing is to be read in conjunction with all other contract drawings and relevant specifications.
 - Any discrepancy between the information given to be brought to attention of the engineer as soon as possible.
 - All materials used in the works shall be to British standards or other applicable specifications
 - All works are to be carried out in accordance with good workmanship practice.
 - All proprietary materials used in the works are to be used in complete accordance with manufacturers recommendations.
 - All buried, surface and overhead service information contained within this drawing is shown indicatively. The services shown may not represent the entirety of all services that may be encountered. All source information should be referred to prior to undertaking works on site. Crouch Waterfall accept no responsibility for omissions or errors in the position of the services present on site, refer to all related engineering drawings, forms and specifications for further information. refer to the residual/ designers risk assessment for actions to minimise and mitigate risk associated with known and unknown services on site.

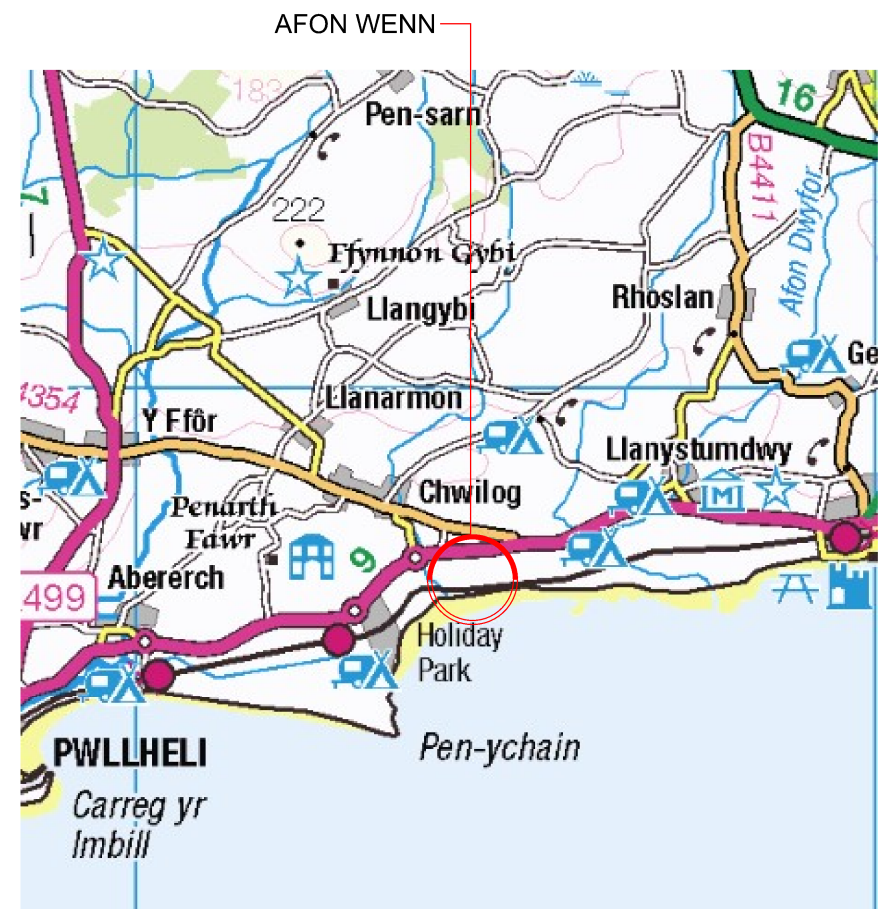

SITE LOCATION
NTS
OS GRID REFERENCE: SH 44800 37100

For Comments

A03	01/12/25	Updated as per client comments			
A02	27/11/25	Updated following comments	CA	BC	DB
A01	15/09/25	Draft for Review and Comments	CA	BC	VF
Rev	Date	Description of Revisions	Drawn	Chkd	Appr

For Internal Review and Comments S3

First Floor
Anchor Court
Keen Road
Cardiff
CF24 5JW

CROUCH
WATERFALL

Tel 07530 065652
cardiff@crouchwaterfall.co.uk



Drawing Title
Afon Wenn
Proposed Sheet Pile
Wall and Rock Armour
General Arrangement - Plan

Designed	M.Finnerty	Signed	Designed by eSign	Date	27/11/25
Drawn	C.Amalin	Signed	Drawn by eSign	Date	27/11/25
Checked	B.Core	Signed	Checked by eSign	Date	27/11/25
Approved	V.Faustino	Signed	Approved by eSign	Date	27/11/25
Scales	ELR & Mileage				
As Shown @ A1	128m 20ch	to	128m 60ch	Sheet	1 of 2
Alternative Reference	N/A			Revision	
Drawing Number	25912C-CWA-WLS-057-DRG-C-0001				A03