


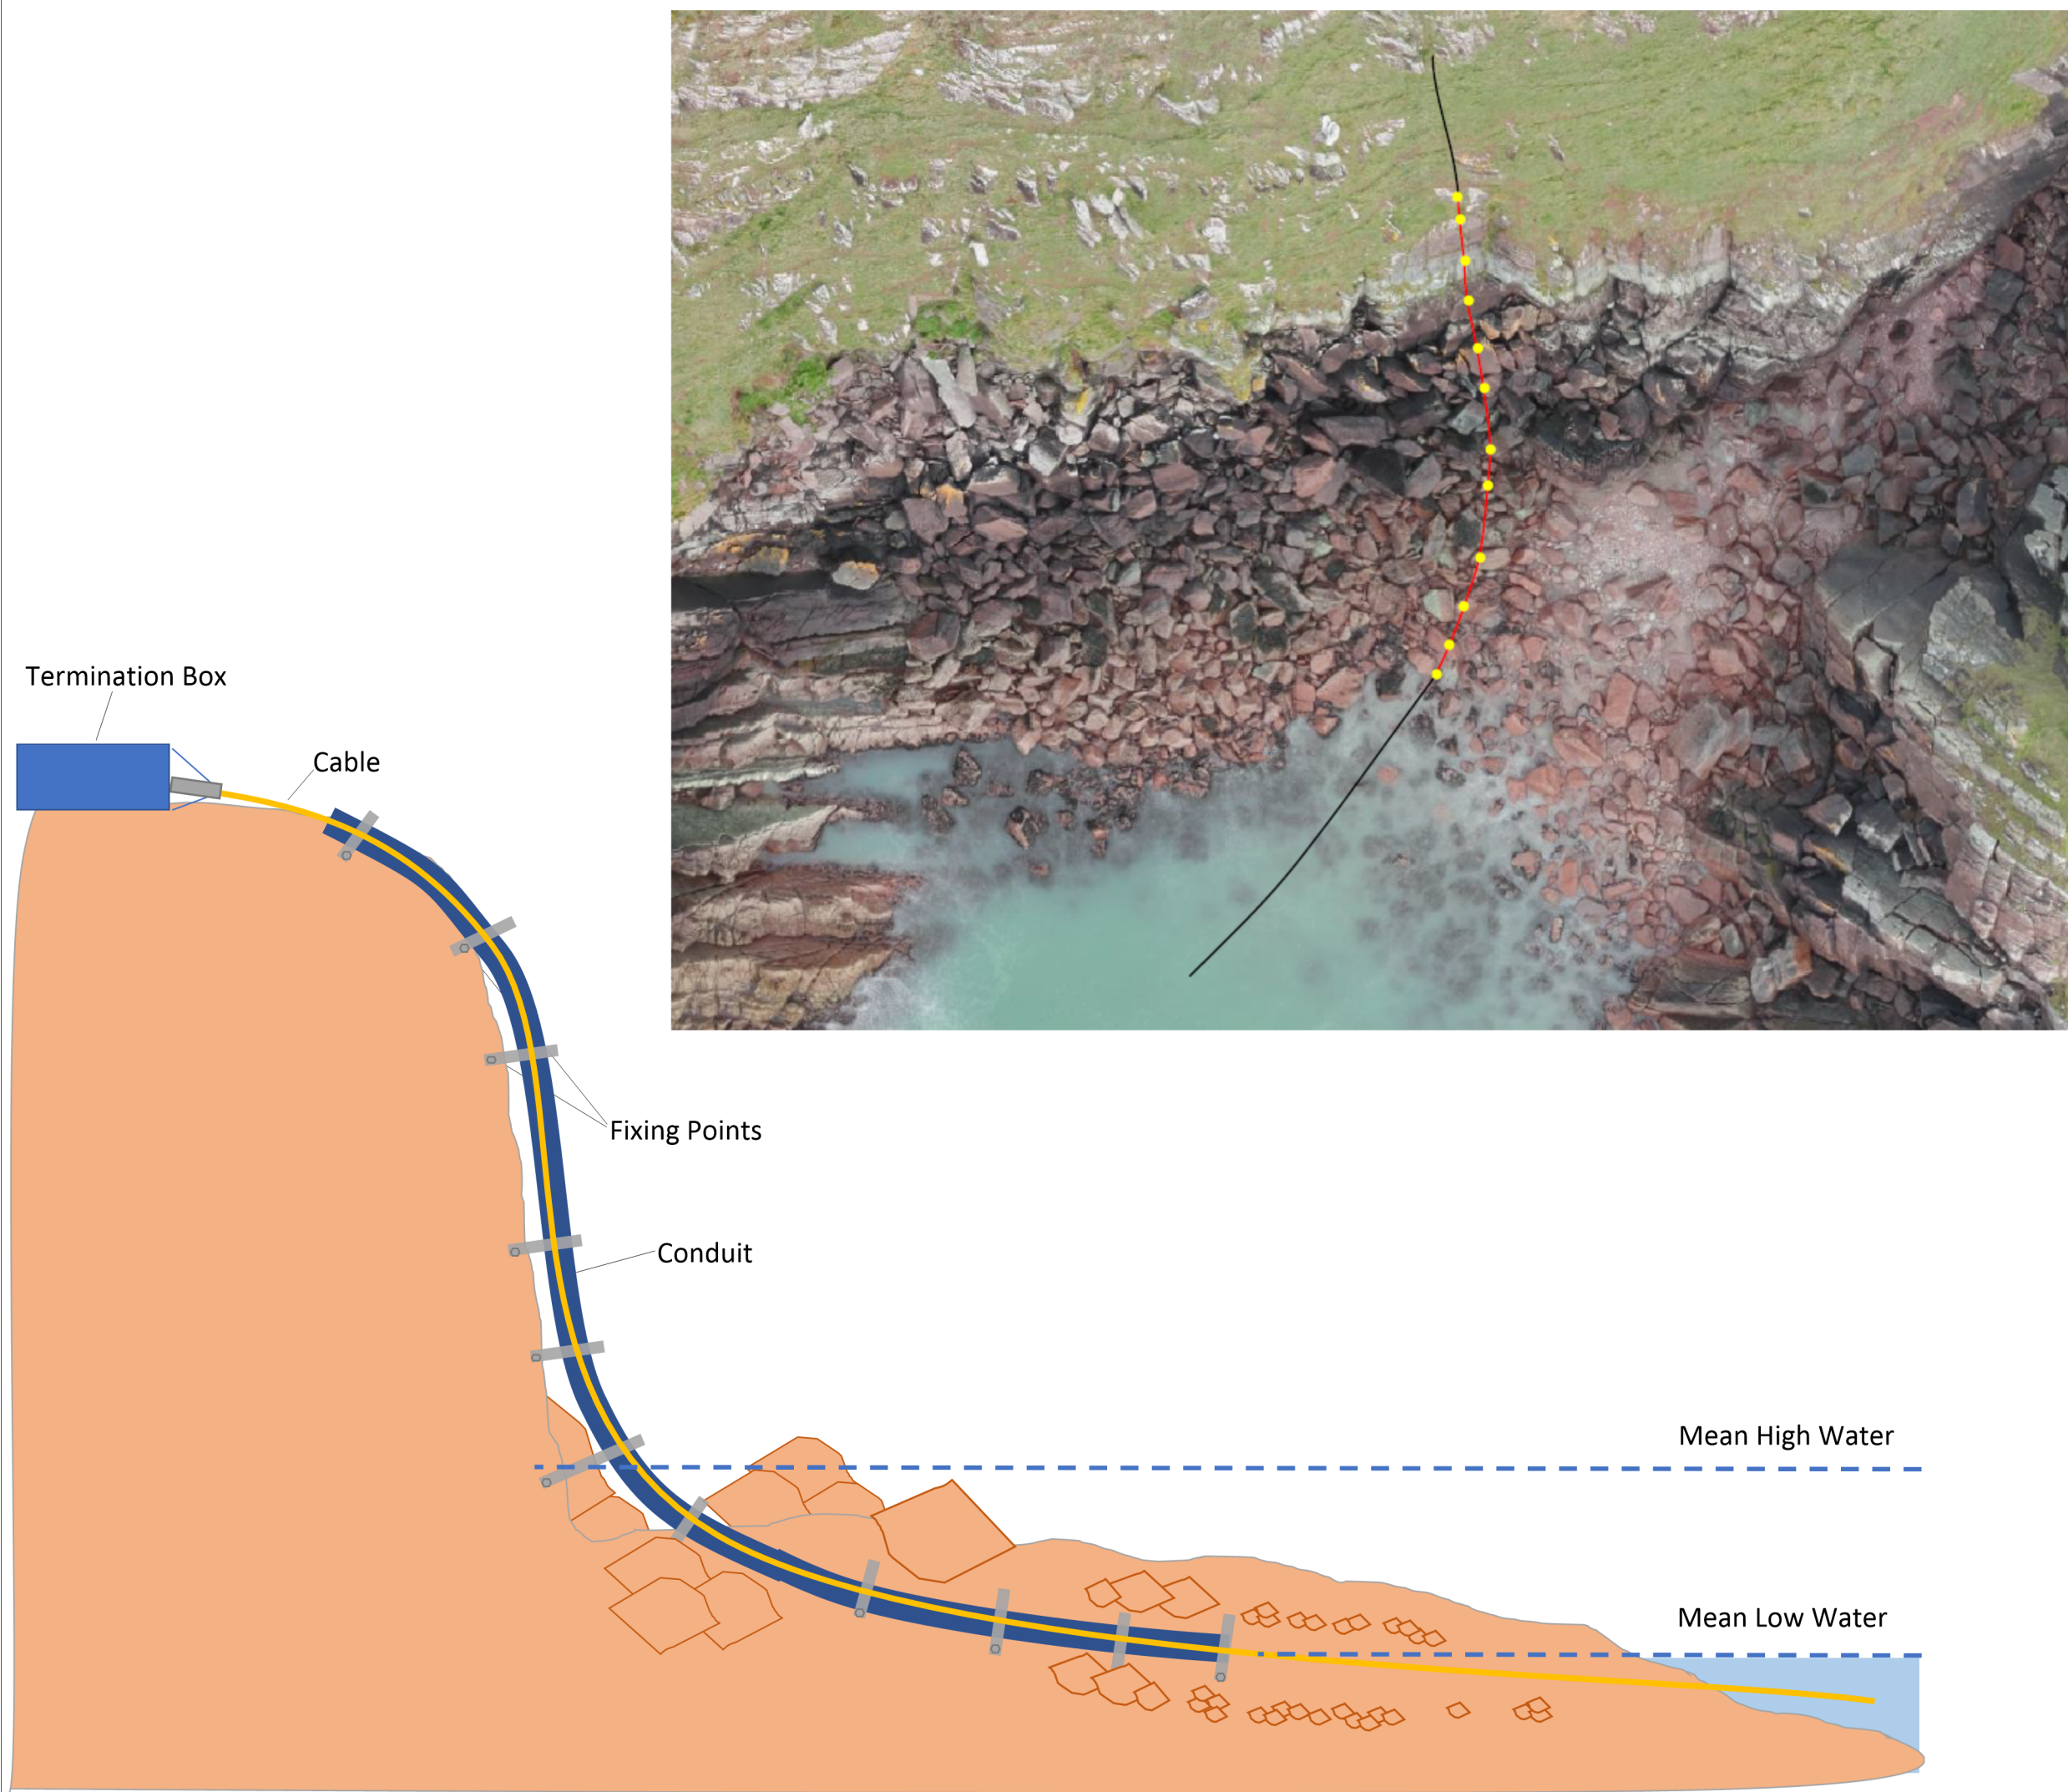

LEGEND

-  Cable
-  Conduit
-  Conduit Fixing Points

NOTES

From the point at which the cable comes onshore, there will be approximately 50m of cable in the intertidal section and approximately 350m to the control station. At East Pickard Bay the cable will be taken up the vertical western side of the gully to the cliff top. The cable will be within a plastic conduit that is fixed to the rock surface using clamps. A termination box and an anchor point (to take the strain of any cable movement from the tides) will be located at the top of the cliff.