

APPENDIX 2757/DAL/A1

Pump specification



Visit us online:
www.pumpsupplies.co.uk

Flygt BS2125

Electric Submersible Pump

- Dewatering pump designed for many applications operating under the toughest of environments
- Available in Aluminium or Cast Iron construction
- Wear parts of hardened cast iron for superior long lasting performance
- Complete with screened cable



T: 01452 726999

F: 01452 721746

E: sales@pumpsupplies.co.uk

www.pumpsupplies.co.uk



Require any pipework, accessories or pump control equipment? Please contact us for more information

BS 2125:



Product:	BS 2125.181 or .320
Installation:	S
Discharge:	3" & 4"
Weight (Max):	80 kg
kW:	8 kW - 9.7 kW
Voltage/Phase:	400/3
Rated Current (A)	15 (MT & HT) 16 (SH)
Height (Av):	865 mm
Width (Av):	485 mm

Available in:


- MT (Medium flow & head)
- HT (High head)
- SH (Super high head)

Options:


- Available with POLY-Life wear parts
- MT & HT option of SS impeller
- Available in special voltages
- Zinc Anodes (seawater)

Part	Material
Outer Casing:	Aluminium or Cast Iron
Impeller:	High Chrome Alloyed
Stator Housing:	Aluminium or Cast Iron
Volute/Strainer:	Galvanised Steel
Shaft:	Stainless Steel

2125.011 (Aluminium):

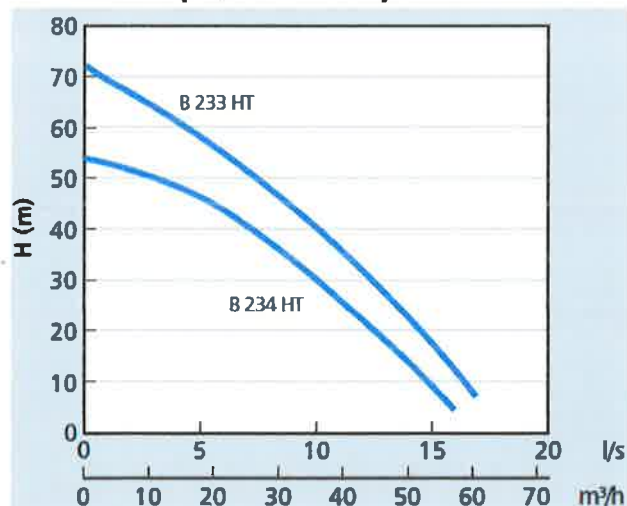

2125.320 (Cast Iron):

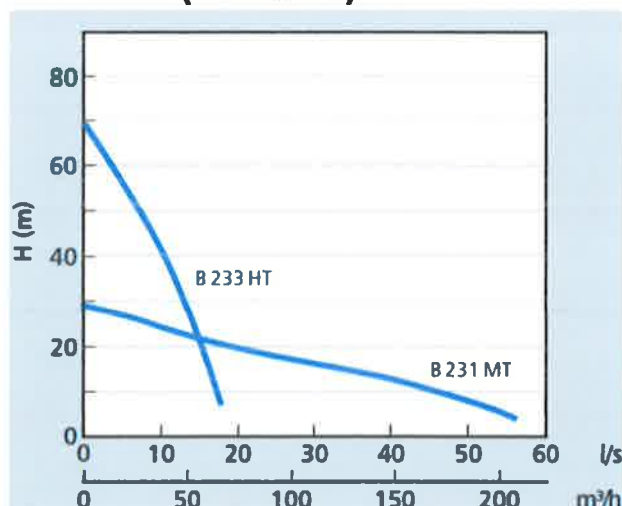

APPLICATIONS

Mining | Quarrying | Construction | Seawater | Final Effluent
Tunnelling | Industry | Flood relief | Storm Water | Dockyards

sales@pumpsupplies.co.uk

01452 726999

www.pumpsupplies.co.uk