

On behalf of  
Cambrian Pet Foods Limited.

Intended for  
Cambrian Pet Foods Limited.

Date  
February 2020

Project Number  
1620007074

# CAMBRIAN PET FOODS LTD, LLANGADOG AIR QUALITY MODELLING REPORT

## CAMBRIAN PET FOODS LTD, LLANGADOG AIR QUALITY MODELLING REPORT

Project No. 1620007074  
Issue No. 02  
Date 28/02/2020  
Made by Ben Madge  
Checked by Graham Harker  
Approved by Graham Harker

Made by:



Checked/Approved by:



*This report has been prepared by Ramboll UK Limited with all reasonable skill, care and diligence, and taking account of the Services and the Terms agreed between Ramboll UK Limited and the Client. This report is confidential to the Client, and Ramboll UK Limited accepts no responsibility whatsoever to third parties to whom this report, or any part thereof, is made known, unless formally agreed by Ramboll UK Limited beforehand. Any such party relies upon the report at their own risk. Ramboll UK Limited disclaims any responsibility to the Client and others in respect of any matters outside the agreed scope of the Services.*

### Version Control Log

Revision	Date	Made by	Checked by	Approved by	Description
01	03/09/2019	BM	GH	GH	First issue to client
02	28/02/2020	AG	GH	GH	Update with additional receptors

Ramboll  
Aston Court  
Pynes Hill  
Exeter  
Devon  
EX2 5AZ  
United Kingdom  
T +44 1392 440 600  
[www.ramboll.co.uk](http://www.ramboll.co.uk)

## CONTENTS

EXECUTIVE SUMMARY	1
1. INTRODUCTION	2
1.1 Site Description	2
1.2 Scope	3
2. METHODOLOGY	1
2.1 Introduction	1
2.2 Air Quality Strategy Objectives	1
2.3 Critical Loads	2
2.4 Significance Criteria	4
3. DISPERSION MODELLING	5
3.1 Introduction	5
3.2 Model Set Up	5
4. BASELINE	8
4.1 Local Monitoring Data	8
4.2 Defra Background Map Data	8
4.3 APIS Background Data	8
5. EXISTING SITE	10
5.1 Introduction	10
5.2 Human Health Impacts	10
5.3 Ecological Impacts	10
6. FUTURE SITE	13
6.1 Introduction	13
6.2 Stack Height Determination	13
6.3 Human Health Impacts	13
6.4 Ecological Impacts	14
7. CONCLUSIONS	17

## LIST OF TABLES

Table 2-1: National Air Quality Objective .....	1
Table 2-2: Derwen-Fach SSSI site relevant critical loads .....	3
Table 3-1: Modelled Receptor Locations.....	7
Table 4-1: Background Concentrations ( $\mu\text{g}/\text{m}^3$ ) .....	8
Table 4-2: Background Deposition Rates .....	8
Table 5-1: Predicted Mean $\text{NO}_2$ Concentrations.....	10
Table 5-2: Predicted $\text{NO}_x$ Concentrations .....	11
Table 5-3: Predicted Nitrogen Deposition.....	12
Table 5-4: Predicted Acid Deposition.....	12
Table 6-1: Predicted Mean $\text{NO}_2$ Concentrations.....	14
Table 6-2: Predicted $\text{NO}_x$ Concentrations .....	14

Table 6-3: Predicted Nitrogen Deposition.....	16
Table 6-4: Predicted Acid Deposition.....	16

## LIST OF FIGURES

Figure 1.1: Site Location.....	2
Figure 3.1: Exova Monitoring Report Summary Data.....	5
Figure 3.2: Wellman Robey Emissions Calculation .....	6
Figure 6.1: Stack Height Graph.....	13

## APPENDICES

Appendix 1  
Modelling set up

Appendix 2  
Daily Mean NO<sub>x</sub> Contour Plots

## EXECUTIVE SUMMARY

Ramboll UK Ltd (Ramboll) has been commissioned by Cambrian Pet Foods Ltd to undertake air dispersion modelling in support of an Environmental Permit application incorporating the operation of the existing boiler plant at The Tywi Valley Food Park, Llangadog. In addition, it is proposed to relocate the boiler plant to a new location in the east of the site, and an assessment has therefore been undertaken of the appropriate stack height for the relocation.

This report sets out the method and results of the dispersion modelling; broadly the scope of the air quality assessment includes:

- Review of local air quality data surrounding the Site;
- Desk study of the building arrangements and locations of human and ecological receptors sensitive to a change in local air quality resulting from the boiler emissions; and
- ADMS dispersion modelling of the operational boiler plant emissions to predict process contributions (PCs) at identified sensitive receptors for comparison against relevant ambient assessment levels.

The modelling has demonstrated that operation of the existing boiler plant would not lead to a breach of National Air Quality Strategy Objectives at the nearest human health receptors. The highest predicted annual mean NO<sub>2</sub> concentration at local human health receptors is 0.62µg/m<sup>3</sup> or 1.6% of the National Air Quality Strategy Objective for the existing site layout. The maximum Predicted Environmental Concentration is 4.0µg/m<sup>3</sup> or 10% of the National Air Quality Strategy Objective. Impacts of NO<sub>x</sub> and nitrogen deposition on the Afon Tywi Special Area of Conservation and Site of Special Scientific Interest (SSSI) and the Derwen-Fach SSSI are considered to be insignificant. The Chwara Talar Wen SSSI is a geological SSSI and therefore not susceptible to air pollution.

For the relocation of the boiler plant, a stack height of 18m is recommended to ensure no significant off-site impacts. Minimum exit velocities for the main boiler and Wellman Robey boiler have been calculated as 10.2m/s and 11.5m/s respectively. The modelling predicts no significant effects on the residential and ecological receptors in accordance with criteria used for Environmental Permitting or planning applications. Due to the relocation of the boilers further from the Afon Tywi and Derwen-Fach, impacts with the future site layout are lower than for the existing site layout.

## 1. INTRODUCTION


Ramboll UK Ltd (Ramboll) has been commissioned by Cambrian Pet Foods Ltd ('the client'), to undertake air dispersion modelling in support of an Environmental Permit application incorporating the operation of the existing boiler plant at The Tywi Valley Food Park, Llangadog ('the Site'). An assessment has also been undertaken of the appropriate stack height for a relocation of the boiler plant to a new location in the east of the site.

This report sets out the method and results of the dispersion modelling used to assess the air quality impacts of the boiler plant. The original version of the report did not consider the impacts on the Derwen-Fach SSSI nor the Chwral Talar Wen SSSI and these have been included in the assessment at the request of Natural Resources Wales.

### 1.1 Site Description

The site lies to the south of the A4069 and is bounded to the south east by The Heart of Wales Railway line with Llangadog railway station approximately 40m to the east of the site. The site location is shown in Figure 1.1

Figure 1.1: Site Location

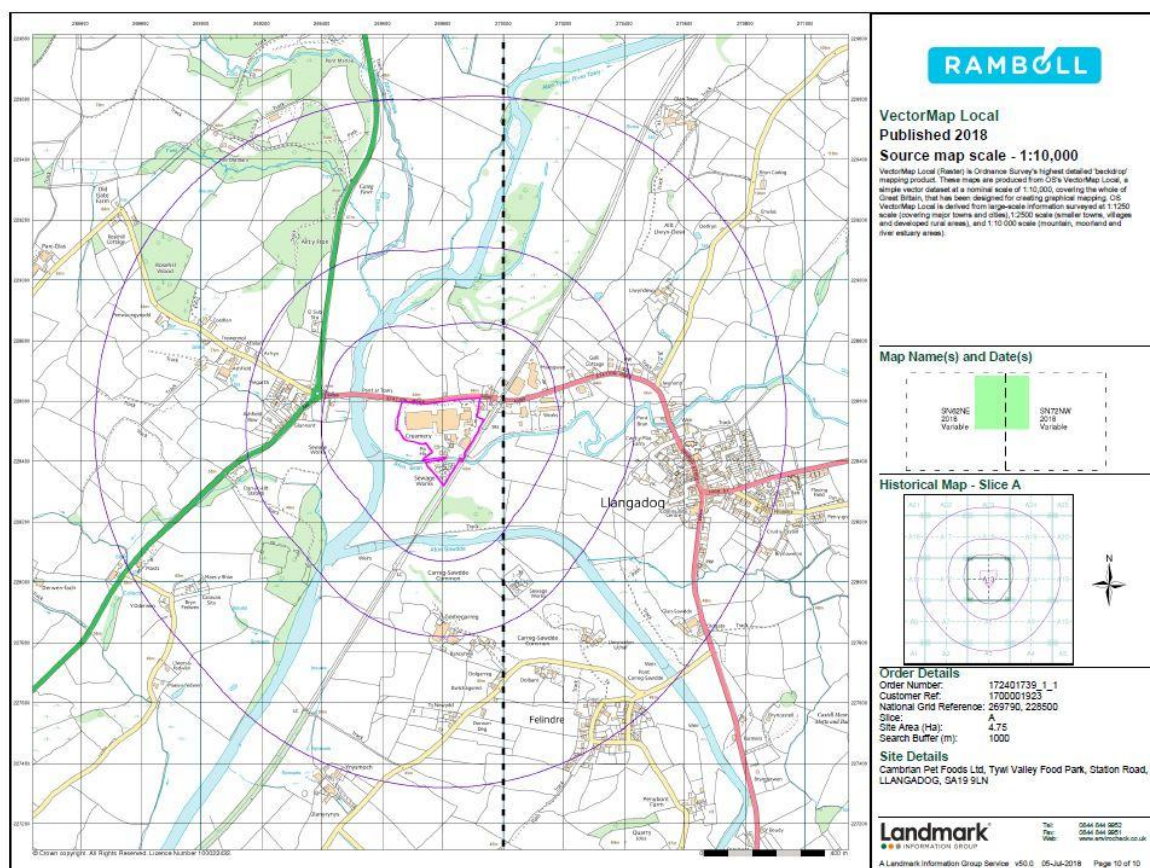

The Site is in a predominantly rural area with the nearest residential property adjacent to the north eastern boundary of the site and two further residential properties within approximately 40m of the site boundary. The site is not located within an Air Quality Management Area (AQMA) and given the predominantly rural nature of the surrounding land use, air quality is expected to be good.

The nearest ecological receptor is the Afon Tywi Special Area of Conservation (SAC) and SSSI. At the European level, the primary reason for the designation of the site is the presence of twaite chad and otters for which the water quality is important. Additional qualifying features of the site are the presence of five other fish species of conservation significance.

The Derwen-Fach SSSI is located approximately 1.6km to the west of the site and has a number of sensitive habitats including marshy grassland and semi-natural woodland. The Chwara Talar Wen SSSI is a geological SSSI with no features listed on the Air Pollution Information System (APIS)<sup>1</sup> website, it is therefore not susceptible to air pollution and has not been considered further in this assessment.

## 1.2 Scope

As the boiler plant is natural gas fired, the pollutant of concern is oxides of nitrogen (NO<sub>x</sub>). Whilst the boilers will also emit carbon monoxide, emissions of CO are very unlikely to lead to breaches of environmental assessment levels and therefore the assessment has concentrated on the emissions of NO<sub>x</sub>.

---

<sup>1</sup> <http://www.apis.ac.uk> accessed February 2020

## 2. METHODOLOGY

### 2.1 Introduction

The scope of the assessment has been determined by consideration of the following:

- Review of local air quality data surrounding the Site, including air quality monitoring data from;
  - Carmarthenshire County Council
  - Air Quality in Wales website<sup>2</sup>
- Desk study of the building arrangements and locations of human and ecological receptors sensitive to a change in local air quality resulting from the boiler emissions;
- ADMS dispersion models with operational energy centre emissions to predict process contributions (PCs) at identified sensitive receptors for comparison against relevant ambient National Air Quality Objectives (NAQOs).

### 2.2 Air Quality Strategy Objectives

The long term and short-term NAQOs that are applicable to this assessment are detailed below in Table 2-1.

Table 2-1: National Air Quality Objective

Pollutant	Concentration ( $\mu\text{g}/\text{m}^3$ )	Averaging Period	NAQO Exceedances Allowed	Percentiles
Human Health Impacts				
Nitrogen dioxide (NO <sub>2</sub> )	200	One hour mean	18	99.79
Nitrogen dioxide (NO <sub>2</sub> )	40	Annual mean	-	-
Ecological receptors				
Oxides of nitrogen (NO <sub>x</sub> )	30	Annual mean	-	-

Recent guidance produced by the Institute of Air Quality Management (IAQM)<sup>3</sup> provides an explanation of the reasoning behind setting of the annual mean NO<sub>x</sub> objective for the protection of ecosystems (paragraphs D.4.8 to D.4.10):

*'The critical level does not differentiate between the role of nitrogen deposition and NO<sub>x</sub> in the air. It is a precautionary general threshold, not specific to a particular habitat, plant species or impact pathway, below which there is currently a high degree of confidence that no adverse effects on vegetation will arise. Long term NO<sub>x</sub> concentrations below the critical level are therefore desirable. Some species or habitats may not show adverse effects until higher concentrations are present.*

*The long term (annual mean) concentration of NO<sub>x</sub> is most relevant for its impacts on vegetation, as the effects, particularly through the nitrogen deposition pathway, are*

<sup>2</sup> <https://airquality.gov.wales/> sourced August 2019.

<sup>3</sup> A guide to the assessment of air quality impacts on designated nature conservation sites, D.4.9, v1.0 June 2019



*additive over months and years. This is reflected in the adoption of the long term guideline in the EU Air Quality Directive as a limit value for vegetation. However, atmospheric exposure to very high concentrations of NO<sub>x</sub> for short periods (hours/days) may also have an adverse effect under certain conditions even if the long term concentrations are below the limit value. The WHO guidelines include a short term (24-hour average) NO<sub>x</sub> critical level of 75µg/m<sup>3</sup>. Originally set at 200µg/m<sup>3</sup> as a four-hour mean, the more detailed CD-ROM version of the 2000 WHO guidelines comments: "Experimental evidence exists that the CLE decreases from around 200µg/m<sup>3</sup> to 75µg/m<sup>3</sup> when in-combination with O<sub>3</sub> or SO<sub>2</sub> at or above their critical levels. In the knowledge that short-term episodes of elevated NO<sub>x</sub> concentrations are generally combined with elevated concentrations of O<sub>3</sub> or SO<sub>2</sub>, 75µg/m<sup>3</sup> is proposed for the 24 h mean." Ozone and SO<sub>2</sub> concentrations are typically low in the UK compared to many other countries. If a regulator does require the use of the short term NO<sub>x</sub> critical level, given the low UK SO<sub>2</sub> concentrations IAQM consider it is most appropriate to use 200µg/m<sup>3</sup> as the short term critical load.*

*The relative importance of the long term mean compared to the short term mean is reflected in several studies which state that the 'UNECE Working Group on Effects strongly recommended the use of the annual mean value, as the long term effects of NO<sub>x</sub> are thought to be more significant than the short term effects'. This IAQM guidance, therefore, recommends that only the annual mean NO<sub>x</sub> concentration is used in assessments unless specifically required by a regulator; for instance, as part of an industrial permit application where high, short term peaks in emissions, and consequent ambient concentrations, may occur.'*

In terms of the assessment of the impacts of NO<sub>x</sub> emissions for an Environmental Permit, the assessment is required to consider both the annual mean and daily mean concentrations. As the extract from the IAQM guidance makes clear however, compliance with the annual mean critical level is the more significant of the two parameters and is likely to be highly protective of vegetation in general.

In terms of the daily mean critical level, the published Environmental Assessment Level in EA guidance<sup>4</sup> is 75µg/m<sup>3</sup> and this is likely to be highly conservative in the context of UK O<sub>3</sub> and SO<sub>2</sub> concentrations and a critical level of 200µg/m<sup>3</sup> is likely to be more appropriate. The results of the dispersion modelling are therefore compared against both of these short-term criteria.

## 2.3 Critical Loads

### 2.3.1 Afon Tywi

For the deposition of air pollutants critical loads have been set for different habitats. The APIS website provides critical loads for nitrogen deposition (leading to eutrophication) and nitrogen acid deposition (leading to acidification) for different habitat types and specific site relevant critical loads for designated sites. The APIS website does not provide site relevant critical loads for the Afon Tywi SAC site interest features (sea lamprey, brook lamprey, river lamprey, allis shad, twaite shad, bullhead and otter). It is stated that there is '*No comparable habitat with established critical load estimate available*', with the additional comment:

*No Critical Load has been assigned to the EUNIS classes for meso/eutrophic systems. These systems are often P limited (or N/P co-limiting), therefore decisions should be*

---

<sup>4</sup> <https://www.gov.uk/guidance/air-emissions-risk-assessment-for-your-environmental-permit>

*taken at a site specific level. Furthermore, consideration should also be given to other sources of N, i.e. discharges to water, diffuse agricultural pollution etc.*

In relation to the potential impacts of nitrogen deposition on freshwater habitats, the APIS website also states in relation to nitrogen deposition to rivers and streams:

*Deposition of ammonia, nitrate and other forms of nitrogen from the atmosphere could be an important source of nitrogen in some upland catchments where intensive agricultural activity is absent. Detailed nitrogen budgets, however, do not exist, so the relative inputs from atmospheric deposition are unknown. In such cases, increasing nitrogen inputs from atmospheric sources are likely to have ecological impacts. In most lowland rivers and burns, nitrogen inputs from catchment land-use, not deposition from the atmosphere, are likely to be much more significant (Strong et al. 1997, Smith & Stewart 1989, Foy et al. 1982).*

Given the lowland location of the installation and the large amount of agricultural activity in the vicinity of the site, it is considered that nitrogen inputs from the land-use are likely to be much more significant than atmospheric nitrogen deposition.

Section 5.5.4.4 of the IAQM guidance also notes that where the change in NO<sub>x</sub> concentrations is less than 0.4µg/m<sup>3</sup> it is unlikely that it would exceed 1% of the most stringent critical loads for nitrogen and acid deposition. This is on the basis that the most stringent critical load for a grassland type habitat is 5kgN/ha/year; with the calculation based on a conversion factor for NO<sub>x</sub> to NO<sub>2</sub> of 0.7 and a deposition velocity of 1.5mm/s, a NO<sub>x</sub> concentration of 0.4µg/m<sup>3</sup> is equivalent to 0.04kgN/ha/year (0.8% of the critical load). The guidance also notes that the lowest critical load is for water plantain at 3kgN/ha/year albeit APIS recommends<sup>5</sup> that this critical load should only be applied to oligotrophic waters with low alkalinity with no significant agricultural or other human inputs. However, in the absence of a site relevant critical load for the habitat, a value of 3kgN/ha/year has been used as the assessment criteria and this is likely to be very conservative. For acid deposition, there are no critical loads available for rivers and streams on the APIS data and therefore the assessment of nitrogen deposition has been limited to eutrophication.

### 2.3.2 Derwen-Fach

The lowest site relevant critical loads for the Derwen-Fach SSSI are shown in Table 2-2.

**Table 2-2: Derwen-Fach SSSI site relevant critical loads**

Habitat	Nitrogen Deposition (kgN/ha/yr)	Nitrogen acid deposition (keqN/ha/yr)	Sulphur acid deposition (keqS/ha/yr)
Mountain hay meadows / calcareous grassland	10 - 20	1.071 – 5.071	4.000
Broadleaved mixed & yew woodland / broadleaved managed woodland	10 - 20	0.357 – 3.179	2.822

<sup>5</sup> APIS indicative critical load values: Recommended values within nutrient nitrogen critical load ranges for use in air pollution impact assessments <http://www.apis.ac.uk/indicative-critical-load-values>

Of the two types of habitat listed, the woodland habitat has the lowest acid deposition critical loads (and will have the highest deposition), and therefore the assessment has been undertaken against the woodland critical load criteria.

## 2.4 Significance Criteria

For Environmental Permitting, Natural Resources Wales currently follow guidance issued by the Environment Agency for assessing the risks of air pollution. For Environmental Permitting, the process contribution (PC) is compared against the relevant environmental standard. PCs that meet both the following criteria can be screened out from further assessment:

- the short-term PC is less than 10% of the short-term environmental standard
- the long-term PC is less than 1% of the long-term environmental standard

It is not explicitly stated within the guidance what is meant by 'short-term' beyond applying to concentrations measured over a 1-hour period. However, conversion factors are provided to convert 1-hour concentrations to 8-hour and 24-hour means, and therefore for the purposes of environmental permitting, these are also considered to be short-term. Note, however, that this differs from guidance provided by the IAQM which does not consider 24-hour mean concentrations as corresponding to short-term (see below).

Whilst intended to apply to screening assessments and the need to undertake dispersion modelling of emissions, the above criteria are commonly applied to the consideration of the impacts from dispersion modelling. Where the PCs do not screen out, the Predicted Environmental Concentration (PEC) must also be calculated. The PEC includes the background concentration and assesses whether the cumulative impact in relation to the environmental standard.

The following screening criteria are then applied to the PECs:

- the short-term PC is less than 20% of the short-term environmental standards minus twice the long-term background concentration
- the long-term PEC is less than 70% of the long-term environmental standards

Again, whilst these are screening criteria they are commonly applied to the consideration of the results of modelling assessments.

For ecological assessments, similar criteria apply:

- the short-term PC is less than 10% of the short-term environmental standard for protected conservation areas
- the long-term PC is less than 1% of the long-term environmental standard for protected conservation areas

Where the above assessment criteria are not met, the long term PEC is assessed:

- If the long-term PEC is less than 70% of the long-term environmental standard, the emissions are insignificant and dispersion modelling is not required.

If the PEC is greater than 70% of the long-term environmental standard, detailed modelling is required, but thereafter, the assessment of significance is whether or not the PEC exceeds the environmental standard.

### 3. DISPERSION MODELLING

#### 3.1 Introduction

Air quality impacts were modelled using the ADMS5<sup>6</sup> air quality dispersion model. This uses representative meteorological data for the local area and plant emissions data to predict ambient concentrations of pollutants in the vicinity of the stack. Details of the ADMS 5 model set up are provided in Appendix 1 with an overview in the following sections.

#### 3.2 Model Set Up

##### 3.2.1 Emission Rates and Operating Hours

There are two boilers that provide heat to the installation; the main boiler and a back-up Wellman Robey boiler. The back-up boiler is only operational when the main boiler is unavailable. For modelling purposes, the main boiler is assumed to be operating continuously all year round for the assessment of annual average impacts.

For hourly and daily mean impacts it is assumed that both boilers will be operational all year round although this is likely to over-estimate short-term concentrations as simultaneous operation of both boilers is only likely to occur for short periods of time.

Emission rates and volumetric flowrates for the main boiler were taken from the Exova monitoring report dated 23<sup>rd</sup> November 2018. A copy of the measured data from the Exova report is shown in Figure 3-1.

Figure 3.1: Exova Monitoring Report Summary Data

9th November 2018

*where MU = Measurement Uncertainty associated with the Result*

Parameter	Concentration				Mass Emission			
	Units	Result	MU +/-	Limit	Units	Result	MU +/-	Limit
Total Particulate Matter <sup>1</sup>	mg/m <sup>3</sup>	1.29	2.22	-	g/hr	3.2	6.0	-
PM <sub>10</sub> <sup>1</sup>	mg/m <sup>3</sup>	0.17	0.34	-	g/hr	0.4	0.9	-
PM <sub>2.5</sub> <sup>1</sup>	mg/m <sup>3</sup>	0.17	0.33	-	g/hr	0.4	0.9	-
Sulphur Dioxide <sup>1</sup>	mg/m <sup>3</sup>	0.55	0.05	-	g/hr	1.3	1.1	-
Nitrogen Monoxide <sup>1</sup>	mg/m <sup>3</sup>	59.2	2.9	-	g/hr	148.6	118.5	-
Oxides of Nitrogen (as NO <sub>2</sub> ) <sup>1</sup>	mg/m <sup>3</sup>	88.9	4.4	-	g/hr	223.2	178.0	-
Carbon Monoxide <sup>1</sup>	mg/m <sup>3</sup>	3	0.68	-	g/hr	8.5	6.9	-
Carbon Dioxide	% v/v	Dry 8.5	0.2					
Oxygen	% v/v	Dry 6.0	0.2					
Water Vapour	% v/v	5.5	0.28					
Stack Gas Temperature	°C	149						
Stack Gas Velocity	m/s	3.7	2.9					
Volumetric Flow Rate (ACTUAL)	m <sup>3</sup> /hr	4423	3520					
Volumetric Flow Rate (REF)	m <sup>3</sup> /hr	2511	1999					

NOTE: VOLUMETRIC FLOW RATE & VELOCITY DATA TAKEN FROM AN AVERAGE OF ALL OF THE ISOKINETIC RUNS.

<sup>1</sup> Reference Conditions (REF) are: 273K, 101.3kPa, dry gas, 5% oxygen.

The only available data on the Wellman Robey boiler is the Saake burner data sheet which shows that the thermal input into the boiler is 9MW gross and 8.1MW net. The AEA Technology Unit Conversion and Screening Tool<sup>7</sup> was used to estimate the volumetric flowrate from the Wellman Robey boiler and the emissions calculated assuming that it meets the Medium Combustion Plant

<sup>7</sup> Unit Conversion Workbook V1.0 John Abbott AEA, 22 Dec 08

Directive emission limit of 100mg/Nm<sup>3</sup>. The results of the emission calculation are shown in Figure 3.2.

Figure 3.2: Wellman Robey Emissions Calculation

**UNIT CONVERSION TOOL TO CALCULATE EMISSIONS**

1. Select fuel type and properties: Natural Gas

2. Select basis of boiler capacity estimate: 3D: Heat input

Check the calorific value, moisture content and ash content in the Fuel Properties spreadsheet.

Select on the basis of the available information. Only one of the Boiler capacity input boxes requires completion.

3. Boiler capacity data input

3A: Fuel use  
Fuel use: 839 m<sup>3</sup>/h

3B: Heat output  
Thermal efficiency: 79% Gross basis  
88% Net basis  
Heat output: 7.11 MW

3C: Volumetric flowrate of flue gas  
Volumetric flowrate: 0.0141 m<sup>3</sup>/s  
at discharge conditions  
0.0% moisture  
3.0% oxygen, dry  
273.0 K

3D: Heat input  
Heat input: 9 MW  
Gross/net: Gross basis  
Heat input: 8.084486203 MW, net

Fuel use: 233.04 litre/s  
Heat input: 8084.49 kW, net; 9000.00 kW, gross  
Volumetric flowrate of flue gas: 3.901 m<sup>3</sup>/s at 6% moisture, 5% oxygen, dry, 393 K

The stack diameter for the Wellman Robey boiler was assumed to be the same as for the main boiler for the existing site modelling.

For the future site modelling, the minimum exit velocities for both boilers were calculated from the heat release and discharge momentum in accordance with Section 6.1.1 of HMIP Technical Guidance Note D1, and the flue diameter set in the model to achieve it. The minimum discharge velocities were calculated to be 10.2 and 11.5m/s for the main boiler and Wellman Robey boiler respectively.

### 3.2.2 Meteorological Data

The modelling has used 5 years' worth of meteorological data for 2014-2018 from the Sennybridge meteorological station which is located approximately 23km to the east of the site. The results from the year that gave the highest predicted concentrations have been reported in the assessment.

### 3.2.3 Receptor Locations

Annual mean and the 99.8<sup>th</sup> percentile of one hour mean NO<sub>2</sub> concentrations have been predicted at the three residential properties immediately to the east of the site boundary.

For the assessment of the impacts within the Afon Tywi SAC/SSSI annual mean and daily mean NO<sub>x</sub> concentrations have been predicted at seven receptor locations representing the eastern and western boundaries of the designated site at its closest point to the installation. For the assessment of the impacts within the Derwen-Fach SSSI, annual mean and daily mean NO<sub>x</sub> concentrations have been predicted on the eastern boundary of the SSSI, which is the closest boundary to the site.

In addition to predicting concentrations at individual receptor locations, a grid of receptors was used to provide a visual interpretation of the dispersion of emissions within the vicinity of the site. The receptor grid was 1500 metres west to east and 1000 metres north to south approximately centred on the site, with a grid spacing of 15 and 10 metres respectively.

Table 3-1: Modelled Receptor Locations

Receptor name	Description	X(m)	Y(m)	Height (m)
Res_1	Residential property	269926	228576	0
Res_2	Residential property	269943	228624	0
Res_3	Residential property	269970	228620	0
SAC_1	Afon Tywi east	269544	228566	0
SAC_2	Afon Tywi	269551	228508	0
SAC_3	Afon Tywi	269582	228465	0
SAC_4	Afon Tywi	269600	228426	0
SAC_5	Afon Tywi	269610	228383	0
SAC_6	Afon Tywi	269607	228334	0
SAC_7	Afon Tywi	269517	228420	0
SSSI_1	Derwen-Fach	268321	228394	0

Nitrogen deposition has been calculated from the predicted annual mean NO<sub>x</sub> concentrations by using a conversion factor of 0.7 to convert NO<sub>x</sub> to NO<sub>2</sub>. A deposition velocity of 1.5mm/s was used to convert NO<sub>2</sub> concentrations into a deposition flux for Afon Tywi, and a deposition velocity of 3mm/s was used for Derwen-Fach. The deposition fluxes were then converted into kgN/ha/year in accordance with the AQTAG06 guidance<sup>8</sup>.

#### 3.2.4 Existing Site

Modelling was undertaken for the existing boiler and stack locations and with the existing buildings on the site.

#### 3.2.5 Future Site

For the future site operations, available information for the modelling included the proposed building layout and therefore the existing site model was adjusted to include the proposed building layout. The emission point for the new boiler plant was placed to the east of the proposed new boiler house as this is the most conservative location for the consideration of the impacts on the nearby residential receptors.

In order to ascertain an appropriate stack height, the model was iterated with stack heights from 10m to 27.5m at 2.5m intervals, and the annual mean NO<sub>2</sub> concentrations were predicted at the residential receptor locations.

<sup>8</sup> AQTAG06 Technical Guidance on detailed modelling approach for an appropriate assessment for emissions to air. 20/4/10, v10

## 4. BASELINE

### 4.1 Local Monitoring Data

A review of the Carmarthenshire County Council monitoring data confirms that there are no nitrogen dioxide monitoring locations in the vicinity of the site. This is to be expected given the lack of pollution sources in the local area.

### 4.2 Defra Background Map Data

The 2019 Defra predicted background concentrations for the grid square covering the site and the receptor locations are shown in Table 4-1 below. As anticipated, these show very low NO<sub>x</sub> and NO<sub>2</sub> concentrations reflecting the rural nature of the area surrounding the site.

Table 4-1: Background Concentrations (µg/m<sup>3</sup>)

Year	X (m)	Y (m)	NO <sub>x</sub>	NO <sub>2</sub>
2019	268500	228500	3.9	3.1
	269500	228500	4.3	3.4

Apart from the site boiler plant, the only local pollution sources are the roads in the vicinity of the site and the railway line adjacent to the site. The A4069 past the site has very low traffic flows; the DFT count data<sup>9</sup> shows a flow of only 2,842 vehicles per day in 2018. The A40 to the west of the site has higher flows<sup>10</sup>, with an estimated flow of 7,330 vehicles per day in 2018. These volumes of traffic are insufficient to significantly increase background pollutant concentrations. Train services on the Llangadog Heart of Wales line are infrequent (10 per day) and also would not significantly increase background pollutant concentrations. The Derwen-Fach SSSI is located in a predominantly rural area and not close to any main roads.

In terms of the assessment, the Defra background concentrations will therefore be used as the baseline concentrations which are likely to be only slightly under-predicted. To assess the short-term PEC against the short-term air quality objectives, a baseline concentration of double the annual mean has been used.

### 4.3 APIS Background Data

The APIS website provides estimates of background pollutant concentrations and deposition for ecological sites averaged over 5km grid squares. The background deposition data are currently 3-year averages for 2015-2017. The deposition data for the designated sites are provided in Table 4-2 below.

Table 4-2: Background Deposition Rates

Site	N deposition (kgN/ha/yr)	Nitrogen acid deposition (keqN/ha/yr)	Sulphur acid deposition (keqS/ha/yr)
Afon-Tywi	19.5	-	-

<sup>9</sup> <https://roadtraffic.dft.gov.uk/manualcountpoints/627>

<sup>10</sup> <https://roadtraffic.dft.gov.uk/manualcountpoints/50513>

Site	N deposition (kgN/ha/yr)	Nitrogen acid deposition (keqN/ha/yr)	Sulphur acid deposition (keqS/ha/yr)
Derwen-Fach	27.58	1.97	0.55

The background nitrogen deposition rates are above the relevant critical loads for the sites. The background acid deposition is below the critical load for Derwen-Fach.



## 5. EXISTING SITE

### 5.1 Introduction

For the existing site operations, the impacts have been considered in terms of the Environmental Permitting criteria.

### 5.2 Human Health Impacts

The maximum predicted PCs and PECs for the five years' worth of meteorological data modelled at the three residential receptor locations in the vicinity of the site are shown in Table 5-1.

Table 5-1: Predicted Mean NO<sub>2</sub> Concentrations

Receptor	AQAL µg/m <sup>3</sup>	Background Concentration µg/m <sup>3</sup>	PC µg/m <sup>3</sup>	PC as % of the AQAL	PEC µg/m <sup>3</sup>	PEC as a % of the AQAL
Annual Mean Concentrations						
Res_1	40	3.4	0.62	1.6	4.0	10.1
Res_2	40	3.4	0.45	1.1	3.8	9.6
Res_3	40	3.4	0.41	1.0	3.8	9.5
99.8 <sup>th</sup> %ile of Hourly Mean Concentrations						
Res_1	200	6.8	13.5	6.7	20.3	10.1
Res_2	200	6.8	9.9	4.9	16.7	8.3
Res_3	200	6.8	9.0	4.5	15.8	7.9

The maximum annual mean PC occurs at Receptor 1 and this contribution is 1.6% of the assessment level and therefore is not insignificant in accordance with Environmental Permitting criteria. The maximum annual mean PEC is only 10.1% of the assessment level, and is therefore not significant.

The maximum hourly mean PC also occurs at Receptor 1 and is 6.7% of the assessment level and therefore can be considered insignificant.

### 5.3 Ecological Impacts

#### 5.3.1 NO<sub>x</sub> Concentrations

The maximum predicted PCs and PECs for the five years' worth of meteorological data modelled at the receptor locations in the Afon Tywi SAC/SSSI and the Derwen-Fach SSSI are shown in Table 5-2.

Table 5-2: Predicted NO<sub>x</sub> Concentrations

Receptor	AQAL µg/m <sup>3</sup>	Background Concentration µg/m <sup>3</sup>	PC µg/m <sup>3</sup>	PC as % of the AQAL	PEC µg/m <sup>3</sup>	PEC as a % of the AQAL
Annual Mean Concentrations						
SAC_1	30	4.3	0.07	0.22	4.4	14.6
SAC_2	30	4.3	0.09	0.28	4.4	14.6
SAC_3	30	4.3	0.12	0.39	4.4	14.7
SAC_4	30	4.3	0.15	0.50	4.4	14.8
SAC_5	30	4.3	0.17	0.57	4.5	14.9
SAC_6	30	4.3	0.16	0.52	4.5	14.9
SAC_7	30	4.3	0.09	0.31	4.4	14.6
SSSI_1	30	3.9	0.03	0.11	3.9	13.0
Daily Mean Concentrations						
SAC_1	75	8.6	9.6	12.8	18.2	24.3
SAC_2	75	8.6	11.7	15.6	20.3	27.1
SAC_3	75	8.6	13.9	18.5	22.5	30.0
SAC_4	75	8.6	10.6	14.1	19.2	25.6
SAC_5	75	8.6	7.4	9.9	16.0	21.4
SAC_6	75	8.6	7.3	9.8	15.9	21.3
SAC_7	75	8.6	7.1	9.5	15.7	21.0
SSSI_1	75	7.8	1.5	2.0	9.3	12.4
SAC_1	200	8.6	9.6	4.8	18.2	9.1
SAC_2	200	8.6	11.7	5.8	20.3	10.1
SAC_3	200	8.6	13.9	6.9	22.5	11.2
SAC_4	200	8.6	10.6	5.3	19.2	9.6
SAC_5	200	8.6	7.4	3.7	16.0	8.0
SAC_6	200	8.6	7.3	3.7	15.9	8.0
SAC_7	200	8.6	7.1	3.6	15.7	7.9
SSSI_1	200	7.8	1.5	0.8	9.3	4.7

Afon Tywi

The maximum annual mean PC occurs at Receptor 5 and this contribution is only 0.6% of the assessment level and therefore can be considered insignificant. The maximum PEC is only 14.9% of the critical level and is dominated by the existing baseline concentration.

The maximum daily mean PC occurs at Receptor 3 and this contribution is 18.5% of the 75µg/m<sup>3</sup> critical level and 6.9% of the 200µg/m<sup>3</sup> critical level. When assessed against the lower critical level the PC is potentially significant, but not so against the higher critical level. The maximum

PEC is  $22.5\mu\text{g}/\text{m}^3$  which is well below both critical levels. Overall, the  $\text{NO}_x$  emissions are unlikely to have an adverse impact on the SAC/SSSI at the point of maximum concentration. In addition, the impacts above 10% of the critical level impact only a short section of the river, the remaining sections have lower concentrations. This is illustrated by the contour plot of daily mean  $\text{NO}_x$  concentrations shown in Appendix 2.

#### Derwen-Fach

The maximum annual mean PC is only 0.11% of the critical level and therefore can be considered insignificant. The maximum daily mean PC is only 2% of the  $75\mu\text{g}/\text{m}^3$  critical level and therefore can be considered insignificant.

#### 5.3.2 Nitrogen Deposition

The maximum predicted PCs for the five years' worth of meteorological data modelled at the receptor locations in the Afon Tywi SAC/SSSI and the Derwen-Fach SSSI are shown in Table 5-3.

Table 5-3: Predicted Nitrogen Deposition

Receptor	Critical Load $\text{kgN}/\text{ha}/\text{yr}$	Background Deposition $\text{kgN}/\text{ha}/\text{yr}$	PC $\text{kgN}/\text{ha}/\text{yr}$	PC as % of the Critical Load
SAC_1	3	19.5	0.007	0.22
SAC_2	3	19.5	0.009	0.29
SAC_3	3	19.5	0.012	0.40
SAC_4	3	19.5	0.015	0.50
SAC_5	3	19.5	0.017	0.58
SAC_6	3	19.5	0.016	0.52
SAC_7	3	19.5	0.007	0.22
SSSI_1	10	27.58	0.007	0.07

For the Afon Tywi SSSI, the maximum predicted nitrogen deposition occurs at Receptor 5 and is 0.6% of the assessment level (which is the lowest critical load for any habitat on APIS). The PC is therefore insignificant.

For the Derwen-Fach SSSI, the maximum predicted nitrogen deposition is only 0.07% of the critical load and is therefore insignificant.

#### 5.3.3 Acid Deposition

The maximum predicted PC for the five years' worth of meteorological data modelled at the receptor location in the Derwen-Fach SSSI is shown in Table 5-4.

Table 5-4: Predicted Acid Deposition

Receptor	Critical Load $\text{keqN}/\text{ha}/\text{yr}$	Background Deposition $\text{keqN}/\text{ha}/\text{yr}$	PC $\text{keqN}/\text{ha}/\text{yr}$	PC as % of the Critical Load
SSSI_1	3.179	1.97	0.0005	0.02

The acid deposition at the Derwen-Fach SSSI is only 0.02% of the critical load and therefore insignificant.

## 6. FUTURE SITE


### 6.1 Introduction

For the future site operations, the impacts have been considered in terms of the Environmental Permitting and planning criteria (as planning permission will be required for the alteration of the site).

### 6.2 Stack Height Determination

The modelling undertaken for different stack heights shows that Receptor 3 is the receptor that requires the highest minimum stack height. Figure 6-1 shows the predicted annual mean NO<sub>2</sub> concentration for the main boiler and both boilers operating together for iterations of the stack height.

Figure 6.1: Stack Height Graph

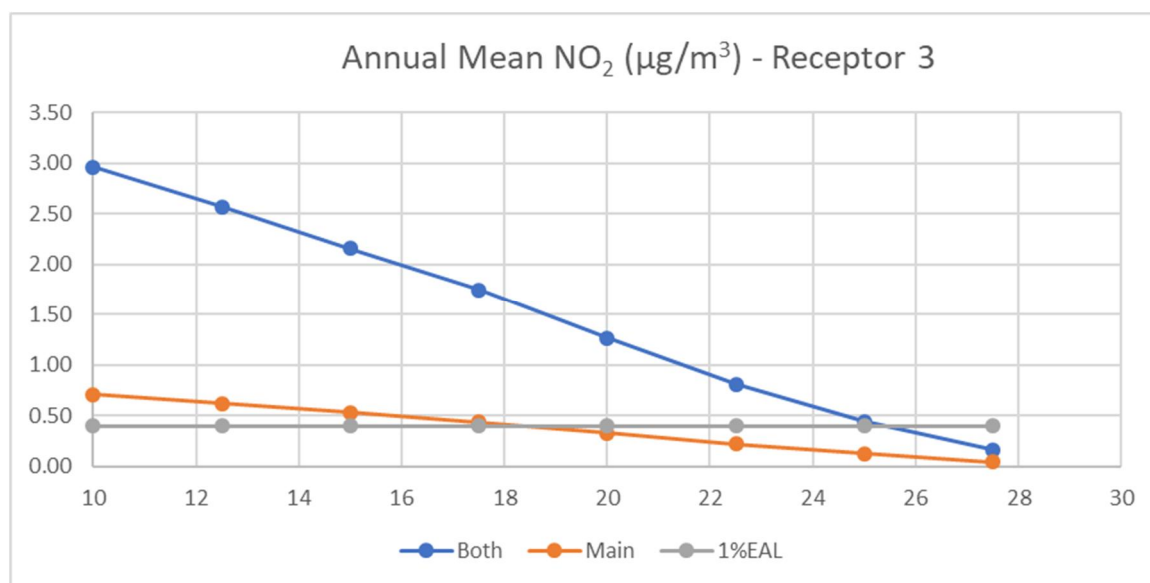

A stack height of approximately 18m is the point at which the impacts from the main boiler become insignificant in terms of Environmental Permitting, where-as for both boilers operating the height would need to increase to 25m.

In terms of planning criteria, given the very low baseline concentrations in the area, in accordance with Table 2-2 a contribution of greater than 5% (2µg/m³) is required before slight adverse impacts occur, and 10% (4 µg/m³) before moderate adverse impacts. In terms of significance, slight adverse is not regarded as a significant impact where-as moderate is. When judged against the planning criteria, a stack height of 18m would give negligible impacts for the main boiler operating alone and for both boilers operating together. Overall therefore, it is recommended that a stack height of 18m is used for the new site layout.

### 6.3 Human Health Impacts

The maximum predicted PCs and PECs for the five years' worth of meteorological data modelled at the three residential receptor locations in the vicinity of the site for a stack height of 18m are shown in Table 6-1.

Table 6-1: Predicted Mean NO<sub>2</sub> Concentrations

Receptor	AQAL µg/m <sup>3</sup>	Background Concentration µg/m <sup>3</sup>	PC µg/m <sup>3</sup>	PC as % of the AQAL	PEC µg/m <sup>3</sup>	PEC as a % of the AQAL
Annual Mean Concentrations						
Res_1	40	3.4	0.43	1.1	3.8	9.6
Res_2	40	3.4	0.35	0.9	3.8	9.4
Res_3	40	3.4	0.43	1.1	3.8	9.6
99.8 <sup>th</sup> %ile of Hourly Mean Concentrations						
Res_1	200	6.8	7.9	3.9	14.7	7.3
Res_2	200	6.8	6.8	3.4	13.6	6.8
Res_3	200	6.8	6.2	3.1	13.0	6.5

The maximum annual mean PC is 1.1% of the assessment level and therefore is marginally above the level that is considered insignificant in Environmental Permitting terms. The maximum annual mean PEC is only 9.6% of the assessment level and can be considered insignificant in Environmental Permitting terms. The maximum PC is negligible in planning terms and therefore insignificant.

The hourly mean PCs and PECs are insignificant as they are well below 10% of the assessment level.

## 6.4 Ecological Impacts

### 6.4.1 NO<sub>x</sub> Concentrations

The maximum predicted PCs and PECs for the five years' worth of meteorological data modelled at the seven receptor locations in the Afon Tywi SAC/SSSI and the Derwen-Fach SSSI for a stack height of 18m are shown in Table 6-2.

Table 6-2: Predicted NO<sub>x</sub> Concentrations

Receptor	AQAL µg/m <sup>3</sup>	Background Concentration µg/m <sup>3</sup>	PC µg/m <sup>3</sup>	PC as % of the AQAL	PEC µg/m <sup>3</sup>	PEC as a % of the AQAL
Annual Mean Concentrations						
SAC_1	30	4.3	0.06	0.18	4.4	14.5
SAC_2	30	4.3	0.07	0.23	4.4	14.6
SAC_3	30	4.3	0.08	0.27	4.4	14.6
SAC_4	30	4.3	0.09	0.29	4.4	14.6
SAC_5	30	4.3	0.09	0.31	4.4	14.6
SAC_6	30	4.3	0.08	0.28	4.4	14.6
SAC_7	30	4.3	0.06	0.21	4.4	14.5
SSSI_1	30	3.9	0.03	0.10	3.9	13.0

Receptor	AQAL $\mu\text{g}/\text{m}^3$	Background Concentration $\mu\text{g}/\text{m}^3$	PC $\mu\text{g}/\text{m}^3$	PC as % of the AQAL	PEC $\mu\text{g}/\text{m}^3$	PEC as a % of the AQAL
Daily Mean Concentrations						
SAC_1	75	8.6	7.8	10.4	16.4	21.9
SAC_2	75	8.6	9.2	12.3	17.8	23.8
SAC_3	75	8.6	6.5	8.7	15.1	20.1
SAC_4	75	8.6	4.8	6.4	13.4	17.9
SAC_5	75	8.6	4.6	6.1	13.2	17.6
SAC_6	75	8.6	4.0	5.4	12.6	16.9
SAC_7	75	8.6	4.2	5.6	12.8	17.1
SSSI_1	75	7.8	1.5	2.0	9.3	12.4
SAC_1	200	8.6	7.8	3.9	16.4	8.2
SAC_2	200	8.6	9.2	4.6	17.8	8.9
SAC_3	200	8.6	6.5	3.3	15.1	7.6
SAC_4	200	8.6	4.8	2.4	13.4	6.7
SAC_5	200	8.6	4.6	2.3	13.2	6.6
SAC_6	200	8.6	4.0	2.0	12.6	6.3
SAC_7	200	8.6	4.2	2.1	12.8	6.4
SSSI_1	200	7.8	1.5	0.8	9.3	4.7

#### Afon Tywi

The maximum annual mean PC occurs at Receptor 5 and this contribution is only 0.3% of the assessment level and therefore can be considered insignificant. The maximum PEC is only 14.6% of the critical level and is dominated by the existing baseline concentration.

The maximum daily mean PC occurs at Receptor 2 and this contribution is 12.3% of the  $75\mu\text{g}/\text{m}^3$  critical level and 4.6% of the  $200\mu\text{g}/\text{m}^3$  critical level. When assessed against the lower critical level the PC is not insignificant, but would be insignificant when assessed against the higher critical level. The maximum PEC is  $17.8\mu\text{g}/\text{m}^3$  which is well below both critical levels.

Overall, the impacts on the SAC/SSSI are lower than for the existing site layout as the boiler plant is located further from the habitat. The  $\text{NO}_x$  emissions are unlikely to have an adverse impact on the SAC/SSSI at the point of maximum concentration. In addition, the impacts above 10% of the critical level affect only a short section of the river, the remaining sections have lower concentrations. This is illustrated by the contour plot of daily mean  $\text{NO}_x$  concentrations shown in Appendix 2.

#### Derwen-Fach

The maximum annual mean PC is only 0.10% of the critical level and therefore can be considered insignificant. The maximum daily mean PC is only 2% of the  $75\mu\text{g}/\text{m}^3$  critical level and therefore can be considered insignificant.

#### 6.4.2 Nitrogen Deposition

The maximum predicted PCs and PECs for the five years' worth of meteorological data modelled at the seven receptor locations in the Afon Tywi SAC/SSSI are shown in Table 6-3.

Table 6-3: Predicted Nitrogen Deposition

Receptor	Critical Load kgN/ha/yr	Background Deposition kgN/ha/yr	PC kgN/ha/yr	PC as % of the Critical Load
SAC_1	3	14.0	0.01	0.19
SAC_2	3	14.0	0.01	0.24
SAC_3	3	14.0	0.01	0.27
SAC_4	3	14.0	0.01	0.29
SAC_5	3	14.0	0.01	0.31
SAC_6	3	14.0	0.01	0.28
SAC_7	3	14.0	0.01	0.21
SSSI_1	10	27.58	0.006	0.06

For the Afon Tywi SAC/SSSI, the maximum predicted nitrogen deposition occurs at Receptor 5 and is 0.3% of the assessment level (which is the lowest critical load for any habitat on APIS). The PC is therefore insignificant.

For the Derwen-Fach SSSI, the maximum predicted nitrogen deposition is only 0.06% of the critical load and is therefore insignificant.

#### 6.4.3 Acid Deposition

The maximum predicted PC for the five years' worth of meteorological data modelled at the receptor location in the Derwen-Fach SSSI is shown in Table 5-4.

Table 6-4: Predicted Acid Deposition

Receptor	Critical Load keqN/ha/yr	Background Deposition keqN/ha/yr	PC keqN/ha/yr	PC as % of the Critical Load
SSSI_1	3.179	1.97	0.0004	0.01

The acid deposition at the Derwen-Fach SSSI is only 0.02% of the critical load and therefore insignificant.

## 7. CONCLUSIONS

An assessment of the impacts of emissions from the boilers at the Cambrian Pet Foods site at Llangadog has been carried out. The assessment has assumed that the main (existing) boiler operates continuously all year round for the assessment of annual average impacts. For the assessment of short-term (hourly and daily) impacts, the assessment has assumed that both site boilers operate concurrently.

There are three residential properties located close to the eastern boundary of the site; and the Afon Tywi SAC/SSSI and Derwen-Fach SSSI are located to the west of the site. The Chwral Talar Wen SSSI is a geological SSSI and therefore not susceptible to air pollution. Background  $\text{NO}_2$  and  $\text{NO}_x$  concentrations in the area are very low due to the predominantly rural nature of the site and the lack of heavily trafficked roads in the area.

Two operating scenarios have been considered; the existing site layout and the future site layout. For the existing site layout the emissions from the boiler do not have any significant effects on the human health or ecological receptors; with pollutant concentrations well below NAQOs and critical levels respectively. Impacts on the Afon Tywi are not significant and are restricted to a short length of the river; it is likely that inputs of nitrogen to the river are dominated by agricultural sources with atmospheric emissions providing very low contributions. Nitrogen deposition is insignificant when considered against the lowest critical load available. Impacts on the Derwen-Fach SSSI are insignificant.

For the future site layout a stack height of 18m is recommended to ensure adequate dispersion of emissions; minimum exit velocities for the main boiler and Wellman Robey boiler have been calculated as 10.2m/s and 11.5m/s respectively. Assuming these input values, the modelling predicts no significant effects on the residential and ecological receptors in accordance with criteria used for Environmental Permitting or planning applications. Due to the relocation of the boilers further from the Afon Tywi and Derwen-Fach, impacts from the future site layout are lower than for the existing site layout.



## APPENDIX 1 MODELLING SET UP

## Stack Emissions Modelling Input Parameters – Existing Site

Parameter	Main Boiler	Wellman Robey
Modelled Stack Location	269823.6 228466.5	269823.6 228466.5
Flue diameter (m)	0.65	0.65
Exit velocity (m/s)	3.7	11.8
Flue exit Temperature (°C)	149	120
Actual flue volumetric flow (m³/s)	1.229	3.901
Normalised flue volumetric flow (Nm³/s)	0.698	2.33
NO <sub>x</sub> emission	88.9mg/Nm³	100mg/Nm³
NO <sub>x</sub> emission, each (g/s)	0.062	0.233

## Stack Emissions Modelling Input Parameters – Future Site

Parameter	Main Boiler	Wellman Robey
Modelled Stack Location	269901 228512	269901 228512
Flue diameter (m)	0.391	0.656
Exit velocity (m/s)	10.2	11.5
Flue exit Temperature (°C)	149	120
Actual flue volumetric flow (m³/s)	1.229	3.901
Normalised flue volumetric flow (Nm³/s)	0.698	2.33
NO <sub>x</sub> emission	88.9mg/Nm³	100mg/Nm³
NO <sub>x</sub> emission, each (g/s)	0.062	0.233

## Operational Hours

For modelling purposes, the equipment is assumed to be operating continuously, 24 hours every day. The annual average results are presented for the main boiler operating alone and the 1-hour and 24-hour mean results are presented for both boilers operating. As this is an infrequent occurrence, the short-term concentrations are likely to be over-predicted.

## Special Treatments

Conversion ratios of 70% and 35% have been applied for the conversion of NO<sub>x</sub> to NO<sub>2</sub> for annual and hourly mean concentrations in accordance with the *EA Conversion Ratios for NO<sub>x</sub> and NO<sub>2</sub>*<sup>11</sup>.

## Buildings Effects

Tall buildings can have a substantial impact on the dispersion of pollutants from stacks, as a result of building downwash i.e. pollutants being drawn down in the wake of a building, giving rise to high concentrations close to the base of the buildings. ADMS5 is able to take account of this

<sup>11</sup> Air Quality Modelling and Assessment Unit, available at  
[file:///Z:/Modelling%20Data/Guidance/noxno2conv2005\\_1233043.pdf](file:///Z:/Modelling%20Data/Guidance/noxno2conv2005_1233043.pdf)


potential impact by the inclusion of rectangular buildings in the model. The buildings included within the modelling are provided in the tables below and the model layouts are shown pictorially.

### Receptor Locations

Receptor locations are shown as green squares; the receptors to the west of the site are arranged along the boundary of the Afon Tywi SAC/SSSI, the receptors to the east of the site are located on the three residential properties close to the site boundary.





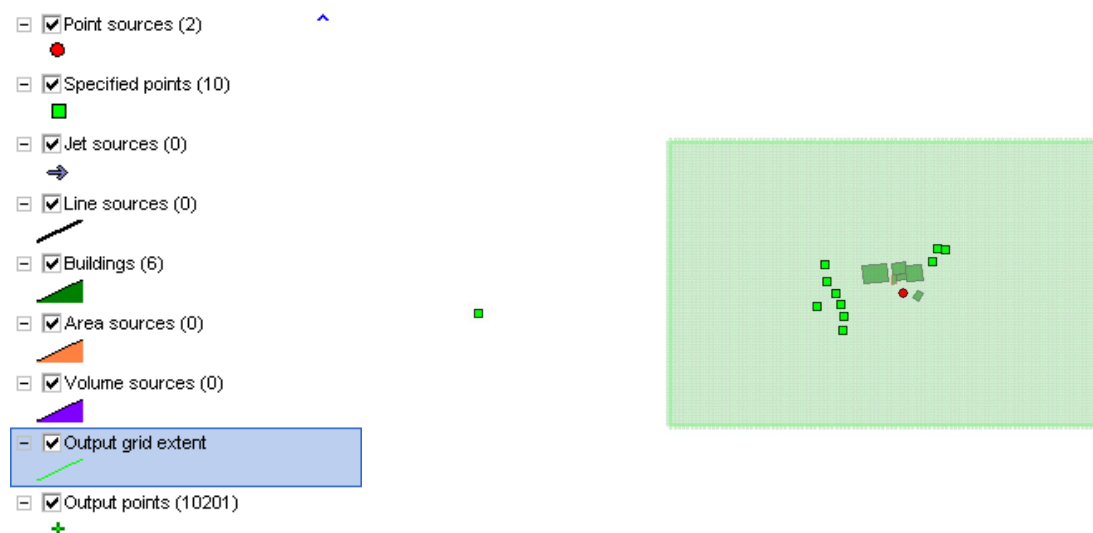




### Buildings – Existing Site


Buildings								
<input type="button" value="New"/> <input type="button" value="Delete"/>								
Main	Name	Shape	X (m)	Y (m)	Height (m)	Length / Diameter (m)	Width (m)	Angle (°)
<input checked="" type="checkbox"/>	Dryer	Rectangular	269789	228514	21	18	33	85.39
<input type="checkbox"/>	Warehouse	Rectangular	269722	228536	9	87	62	85.39
<input type="checkbox"/>	Canning	Rectangular	269806.5	228553	9	47	42	85.39
<input type="checkbox"/>	Niro building	Rectangular	269815	228522.2	11.5	35	21	85.39
<input type="checkbox"/>	Cold store	Rectangular	269874	228457	9	31	25	30.9
<input type="checkbox"/>	Preparation	Rectangular	269860.6	228536.6	7	58	58	85.39
<input type="checkbox"/>								
<input type="checkbox"/>								
<input type="checkbox"/>								
<input type="checkbox"/>								



Buildings – Future Site

Buildings								
<div>NewDelete</div>								
Main	Name	Shape	X (m)	Y (m)	Height (m)	Length / Diameter (m)	Width (m)	Angle (°)
<input checked="" type="checkbox"/>	Dryer	Rectangular	269789	228514	21	18	33	85.39
<input type="checkbox"/>	Warehouse	Rectangular	269722	228536	9	87	62	85.39
<input type="checkbox"/>	Canning	Rectangular	269806.5	228553	9	47	42	85.39
<input type="checkbox"/>	New production	Rectangular	269815.5	228516.5	9	35	33	85.39
<input type="checkbox"/>	Cold store	Rectangular	269874	228457	9	31	25	30.9
<input type="checkbox"/>	Preparation	Rectangular	269860.6	228536.6	7	58	58	85.39
<input type="checkbox"/>	New production 2	Rectangular	269809.6	228478.9	9	53	41	85.39
<input type="checkbox"/>								
<input type="checkbox"/>								
<input type="checkbox"/>								

- ☐ ☒ Point sources (2)  

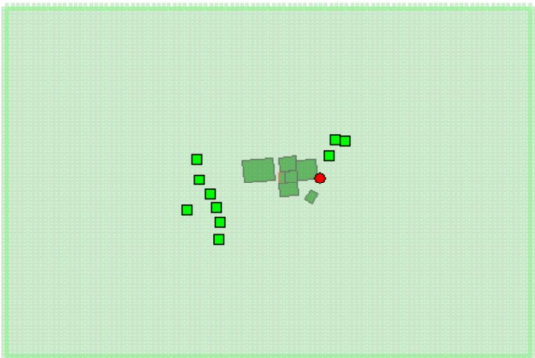- ☐ ☒ Specified points (10)  

- ☐ ☒ Jet sources (0)  

- ☐ ☒ Line sources (0)  

- ☐ ☒ Buildings (7)  

- ☐ ☒ Area sources (0)  

- ☐ ☒ Volume sources (0)  

- ☐ ☒ Output grid extent  

- ☐ ☒ Output points (10201)  




### Terrain and Surface Roughness


The terrain in the vicinity of the development is relatively flat, and therefore terrain effects have not been included within the modelling.

The modelling adopts the maximum surface roughness value of 0.2m for the Site, to take account of the rural location of the site. The meteorological measurement site's surface roughness was set to the same value of the site.

## APPENDIX 2

### DAILY MEAN NO<sub>x</sub> CONTOUR PLOTS

Existing Site

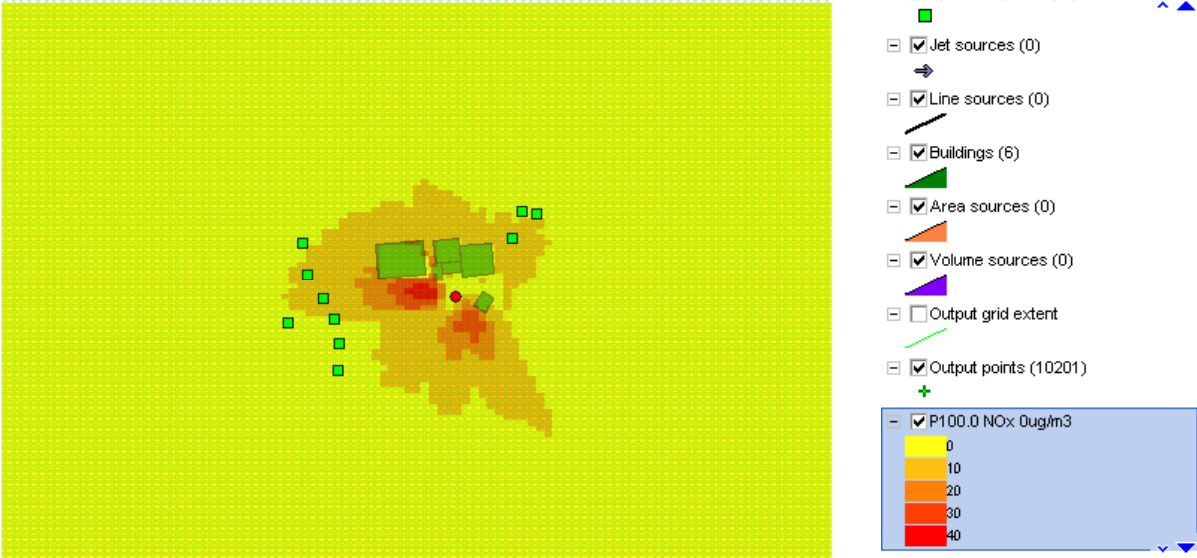

Future Site

