




ccr
energy

Nige Williams

outfall repairs and quotes

Outfalls (at low tide)

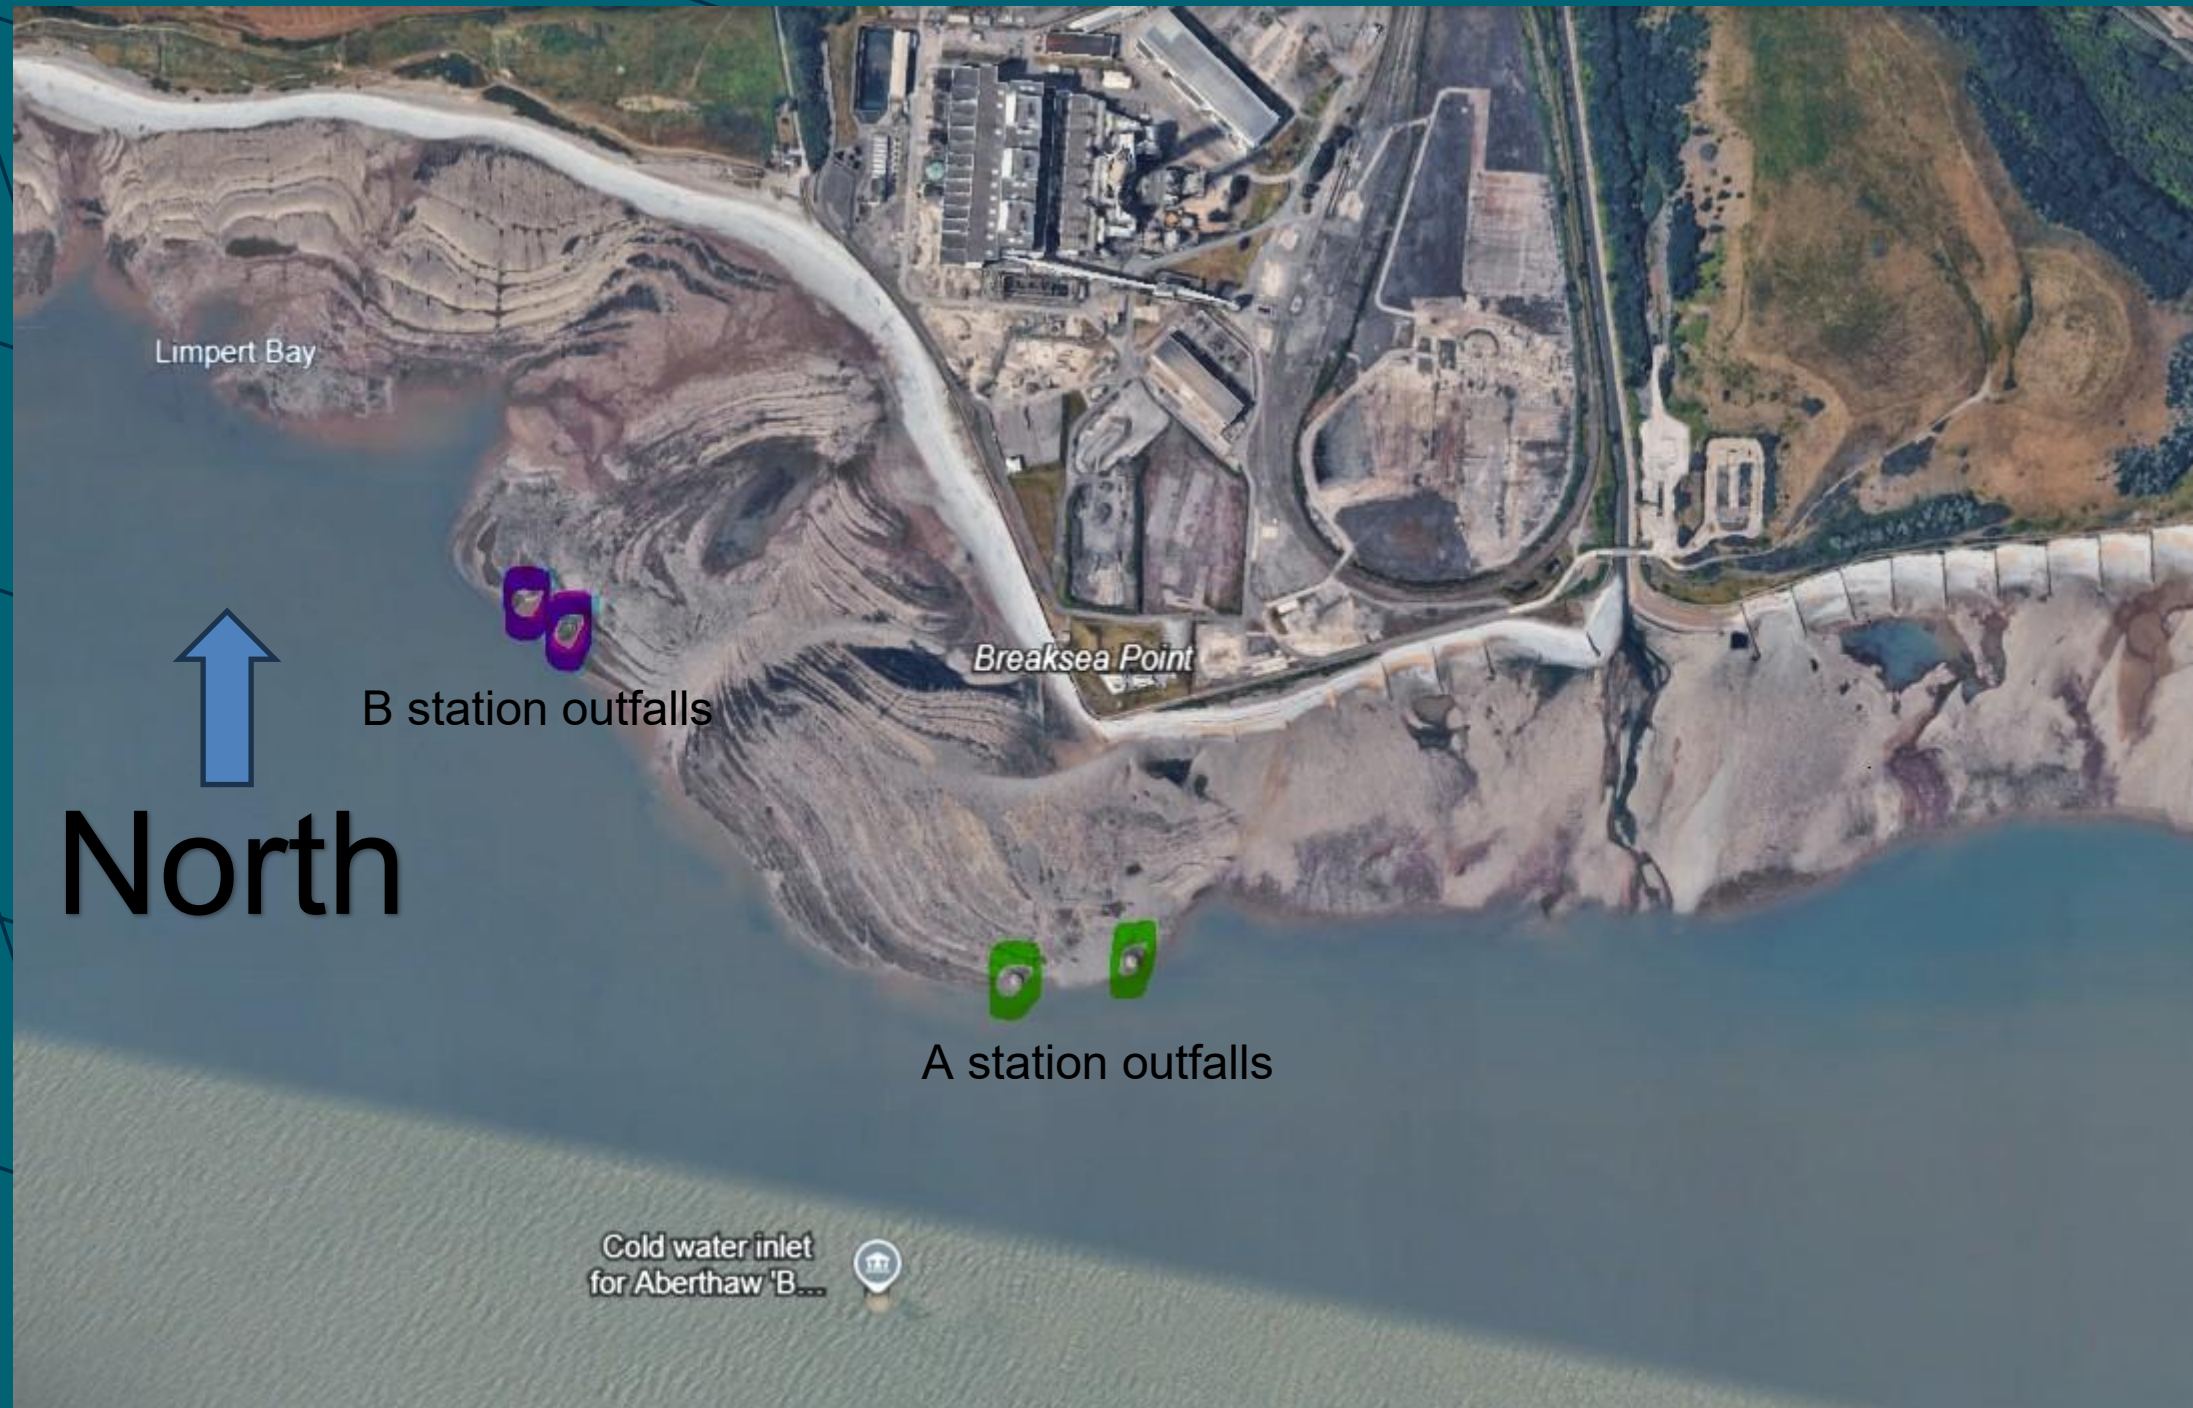

Outfalls A station

51.379153 -3.404408



Outfalls B station 51.382615 -3.413967



51.383057 -3.414482





Out Fall Repairs (No VAT)

Materials only	Galv	stainless	Delta
A station out fall			
West	N/A	£1,650	N/A
B station			
East	N/A	£175	N/A
West	£5,095	£6,895	£1,800

Installation of Security Screens A & B Stations

Item	Installation of Security Screens-	Cost Per Day	Number Required	Total
1	Five-man Installation Team – B station installation	£2,250.00	1	£2,250.00
2	Four-man Team- A station installation	£1,800.00	1	£1,800.00
3	Welding generator,110v drills, hand tools	£ 85.00	2	£ 170.00
4	Lifting aids, chain bocks, tirsors, fall arrest winches, harness's, safety lines	£ 110.00	1	£ 110.00
5	6 Tonne dumpers, inclusive of delivery/collection costs- minimum one week hire	£795.00	Set rate	£ 795.00
6	Site steel brackets, anchor bolts, to assist in lowering/lifting the security screens into the correct position	£ 160.00	Set rate	£ 160.00
7	RAMS & Health & Safety Documentation	£54.00	2	£ 108.00
	Total Cost			£ 5,393.00

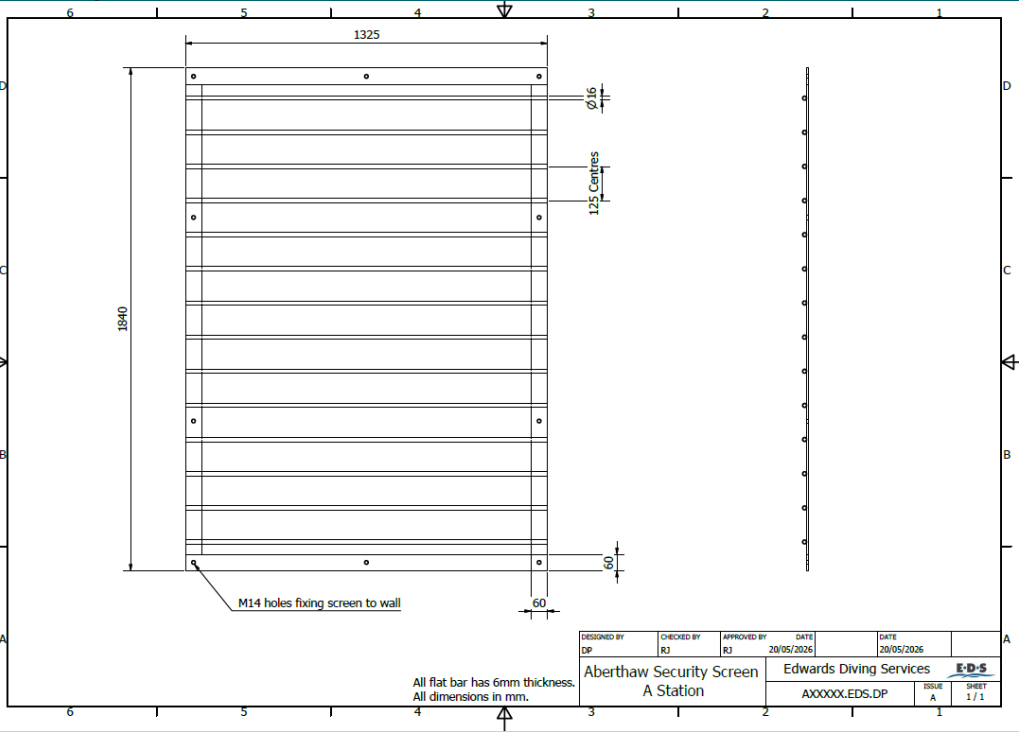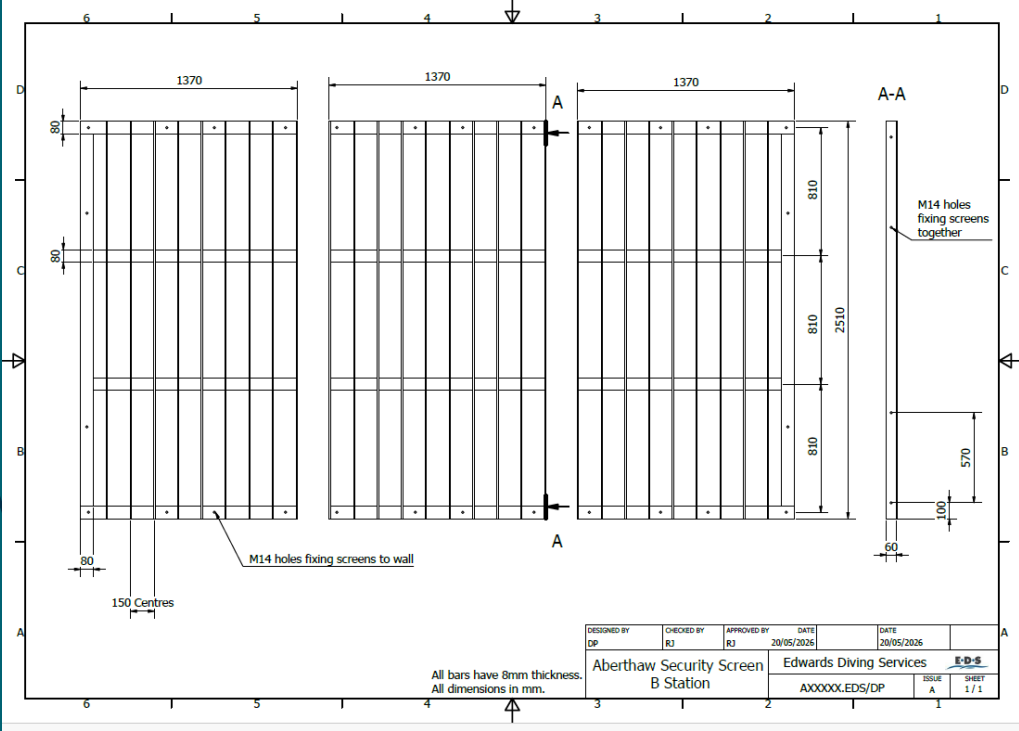

The installation will be completed over 2 days, using 6 tonne dumpers to transport the equipment/ screens to each station. Spring tides will be required to complete the installation, from memory 0.7m tide is a good tide to complete the installation.