

**A Dispersion Modelling Study of the Impact of Odour from the
Proposed Pullet Chicken Rearing Houses at Garn Farm, near
Llanbadarn Fynydd in Powys**

Prepared by Phil Edgington

AS Modelling & Data Ltd.

Email: philedgington@asmodata.co.uk

Telephone: 01952 462500

13th July 2018

1. Introduction

AS Modelling & Data Ltd. has been instructed by Gail Lewis of Roger Parry & Partners LLP, on behalf of the applicant V. E. Lewis & Son, to use computer modelling to assess the impact of odour emissions from the proposed pullet chicken rearing houses at Garn Farm, Llanbadarn Fynydd, Llandrindod Wells, Powys. LD1 6YE.

Odour emission rates from the proposed poultry houses have been assessed and quantified based upon an emissions model that takes into account the likely internal odour concentrations and ventilation rates of the poultry houses. The odour emission rates so obtained have then been used as inputs to an atmospheric dispersion model which calculates odour exposure levels in the surrounding area.

This report is arranged in the following manner:

- Section 2 provides relevant details of the site and potentially sensitive receptors in the area.
- Section 3 provides some general information on odour; details of the methods used to estimate odour emissions from the poultry houses; relevant guidelines and legislation on exposure limits and where relevant, details of likely background levels of odour.
- Section 4 provides some information about ADMS, the dispersion model used for this study and details the modelling parameters and procedures.
- Section 5 contains the results of the modelling.
- And Section 6 provides a discussion of the results and conclusions.

2. Background Details


The site of the proposed pullet rearing houses at Garn Farm is in an isolated rural area, approximately 3.5 km to the north of the village of Llanbadarn Fynydd in Powys. The surrounding land is used largely for livestock farming, although there are some isolated wooded areas and extensive areas of upland heath on the mountains to the north-east. The site is within a col at an altitude of around 441 m, with land rising towards hill/mountain tops to the north-east and south-west and falling towards the River Ithon Valley to the north-west and the valley formed by the Cwm Nant-ddu to the south-east.

It is proposed that two new poultry houses be constructed. Each house would provide accommodation for up to 38,000 pullets, which would be reared from day old chicks to between 18 to 20 weeks old, prior to transfer to egg laying units elsewhere. The houses would be ventilated by uncapped high speed ridge fans, each with a short chimney. Every four days, the birds' droppings would be removed by a belt collection system and stored temporarily on the farm, prior to being removed from site or spreading to land.

There are isolated residences and commercial properties in the area surrounding the site of the proposed poultry houses at Garn Farm. Excluding the farm house at the site, the closest residence is approximately 230 m to the east of the proposed poultry houses and there are further residences at Blaen-nant-du, which is approximately 450 m to the east, at Nanty, which is approximately 575 m to the south and a further residence which is approximately 850 m to the north-east of the site.

A map of the surrounding area is provided in Figure 1; the positions of the proposed poultry houses at Garn Farm are outlined in blue.

Figure 1. The area surrounding the site of the poultry unit at Garn Farm

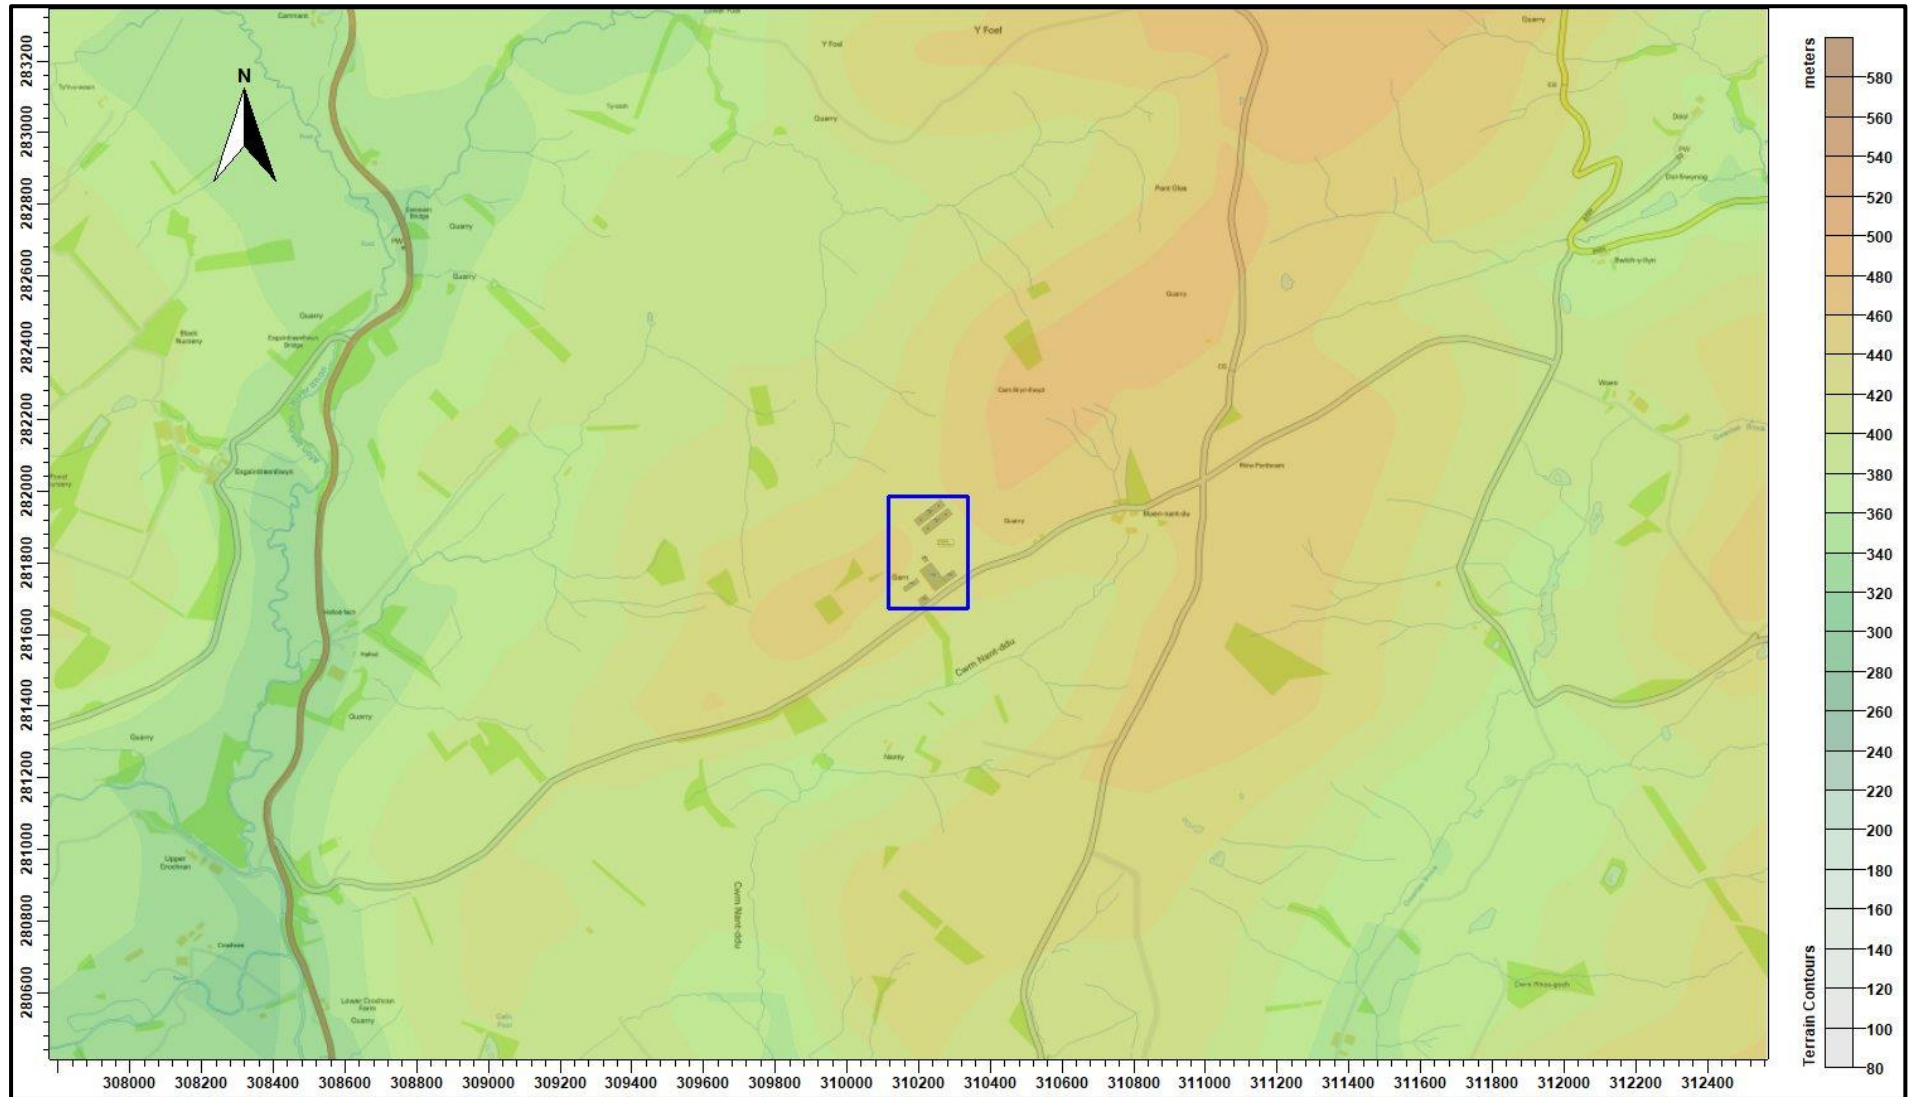

© Crown copyright and database rights 2018.

3. Odour, Emission Rates, Exposure Limits & Background Levels

3.1 Odour concentration, averaging times, percentiles and FIDOR

Odour concentration is expressed in terms of European Odour Units per metre cubed of air (ou_E/m^3). The following definitions and descriptions of how an odour might be perceived by a human with an average sense of smell may be useful, however, it should be noted that within a human population there is considerable variation in acuity of sense of smell.

- $1.0\ ou_E/m^3$ is defined as the limit of detection in laboratory conditions.
- At $2.0 - 3.0\ ou_E/m^3$, a particular odour might be detected against background odours in an open environment.
- When the concentration reaches around $5.0\ ou_E/m^3$, a particular odour will usually be recognisable, if known, but would usually be described as faint.
- At $10.0\ ou_E/m^3$, most would describe the intensity of the odour as moderate or strong and if persistent, it is likely that the odour would become intrusive.

The character, or hedonic tone, of an odour is also important; typically, odours are grouped into three categories.

Most offensive:

- Processes involving decaying animal or fish remains.
- Processes involving septic effluent or sludge.
- Biological landfill odours.

Moderately offensive:

- Intensive livestock rearing.
- Fat frying (food processing).
- Sugar beet processing.
- Well aerated green waste composting.

Less offensive:

- Brewery.
- Confectionery.
- Coffee roasting.
- Bakery.

Dispersion models usually calculate hourly mean odour concentrations and Environment Agency guidelines and findings from UK Water Industry Research (UKWIR) are also framed in terms of hourly mean odour concentration.

The Environment Agency guidelines and findings from UKWIR use the 98th percentile hourly mean; this is the hourly mean odour concentration that is equalled or exceeded for 2% of the time period considered, which is typically one year. The use of the 98th percentile statistic allows for some consideration of both frequency and intensity of the odours.

At some distance from a source, it would be unusual if odour concentration remained constant for an hour and in reality, due to air turbulence and changes in wind direction, short term fluctuations in concentration are observed. Therefore, although average exposure levels may be below the detection threshold, or a particular guideline, a population may be exposed to short term concentrations which are higher than the hourly average. It should be noted that a fluctuating odour is often more noticeable than a steady background odour at a low concentration. It is implicit that within the models hourly averaging time and the Environment Agency guidelines and findings from UKWIR that there would be variation in the odour concentration around this mean, i.e. there would be short periods when odour concentration would be higher than the mean and lower than the mean.

The FIDOR acronym is a useful reminder of the factors that will determine the degree of odour pollution:

- **F**requency of detection.
- **I**ntensity as perceived.
- **D**uration of exposure.
- **O**ffensiveness.
- **R**eceptor sensitivity.

3.2 Environment Agency guidelines (Rebranded by Natural Resources Wales)

In April 2011, the Environment Agency published H4 Odour Management guidance (H4). In Appendix 3 – Modelling Odour Exposure, benchmark exposure levels are provided. The benchmarks are based on the 98th percentile of hourly mean concentrations of odour modelled over a year at the site/installation boundary. The benchmarks are:

- 1.5 ou_E/m³ for most offensive odours.
- 3.0 ou_E/m³ for moderately offensive odours.
- 6.0 ou_E/m³ for less offensive odours.

Any modelled results that project exposures above these benchmark levels, after taking uncertainty into account, indicates the likelihood of unacceptable odour pollution.

3.3 UK Water Industry Research findings

The main source of research into odour impacts in the UK has been the wastewater industry. An in-depth study of the correlation between modelled odour impacts and human response was published by UKWIR in 2001. This was based on a review of the correlation between reported odour complaints and modelled odour impacts in relation to nine wastewater treatment works in the UK with on-going odour complaints. The findings of this research and subsequent UKWIR research indicated the following, based on the modelled 98th percentile of hourly mean concentrations of odour:

- At below 5.0 ou_E/m³, complaints are relatively rare at only 3% of the total registered.
- At between 5.0 ou_E/m³ and 10.0 ou_E/m³, a significant proportion of total registered complaints occur, 38% of the total.
- The majority of complaints occur in areas of modelled exposures of greater than 10.0 ou_E/m³, 59% of the total.

3.4 Choice of odour benchmarks for this study

Odours from poultry rearing are usually placed in the moderately offensive category. Therefore, for this study, the Environment Agency's benchmark for moderately offensive odours, a 98th percentile hourly mean of 3.0 ou_E/m³ over a one year period, is used to assess the impact of odour emissions from the proposed poultry unit at potentially sensitive receptors in the surrounding area.

3.5 Quantification of odour emissions

Odour emission rates from poultry houses depend on many factors and are highly variable. At the beginning of a crop cycle, when chicks are small, litter is clean and only minimum ventilation is required, the odour emission rate may be small. Towards the end of the crop, odour production within the poultry housing increases and ventilation requirements are greater, particularly in hot weather, therefore emission rates are considerably greater than at the beginning of the crop.

Peak odour emission rates are likely to occur when the housing is cleared of spent litter at the end of each crop. There is little available information on the magnitude of this peak emission, but it is likely to be greater than any emission that might occur when there are birds in the house. The time taken to perform the operation is usually around two hours per house. Note that it is normal to maintain ventilation during this time. There are measures that can be taken to minimise odour production whilst the housing is being cleared of spent litter and there is usually some discretion as to when the operation is carried out; therefore, to avoid high odour levels at nearby sensitive receptors it may be possible to time the operation to coincide with winds blowing in a favourable direction.

For the calculation for pullet rearing houses, the internal concentration is assumed to be a function of the age of the crop and the stocking density. The internal concentrations used in the calculations increase exponentially from 300 ou_E/m³ at day 1 of the crop, to approximately 3,200 ou_E/m³ at day 140 of the crop.

The ventilation rates used in the calculations are based on industry practices and standard bird growth factors. Minimum ventilation rates are as those of an operational poultry house and maximum ventilation rates are based on Defra guidelines. Target internal temperature is 32 Celsius at the beginning of the crop and is decreased to 21 Celsius by day 91 of the cycle. If the external temperature is 7 Celsius, or more, lower than the target temperature, minimum ventilation only is assumed for the calculation. Above this, ventilation rates are increased in proportion to the difference between ambient temperature and target internal temperature. A maximum transitional ventilation rate (35% of the maximum possible ventilation rate) is reached when the temperature is equal to the target temperature. A high ventilation rate (70% maximum possible ventilation rate) is reached when the temperature is 4 degrees above target and if external temperature is above 33 Celsius the maximum ventilation rate is assumed.

At high ventilation rates, it is likely that internal odour concentrations fall because odour is extracted much faster than it is created. Therefore, if the calculated ventilation rate exceeds that required to replace the volume of air in the house every 5 minutes, internal concentrations are reduced (by a factor of the square root of 7.5 times the shed volume/divided by the ventilation rate as an hourly figure).


Based upon these principles, an emission rate for each hour of the period modelled is calculated by multiplying the concentration by the ventilation rate. Both the crop length and period the housing is empty can be varied. An estimate of the emission during the cleaning out process can also be included. In this case, it is assumed that the houses are cleared sequentially and each house takes 2 hours to clear.

In this case, it is assumed for the calculations that the crop length is 140 days and that there is an empty period of 42 days after each crop. To provide robust statistics, four sets of calculations were performed; the first with the first day of the meteorological record coinciding with day 1 of the crop cycle, the second coinciding with day 45 of the crop, the third coinciding with day 91 of the crop and the fourth coinciding with day 136 of the crop. A summary of the emission rates used in this study is provided in Table 1. It should be noted that the figures in this table refer to the whole of the crop length whilst most figures quoted in literature are figures obtained from the latter stages of the crop cycle and therefore should not be compared directly to the AS Modelling & Data Ltd. figures in the table. The specific odour emission rate used for the clearing process is approximately 3.3 ou_E/bird/s and the 98th percentile emission rate is approximately 1.2 ou_E/bird/s. As an example, a graph of the specific emission rate over the first year of the meteorological record for each of the four crop cycles is shown in Figure 2.

Table 1. Summary of odour emission rates (average/maximum of all 4 cycles)

Emission rate (ou _E /s per bird as stocked, during crop)				
Season	Average	Night-time Average	Day-time Average	Maximum
Winter	0.339	0.305	0.407	1.492
Spring	0.371	0.307	0.436	2.183
Summer	0.411	0.310	0.472	2.291
Autumn	0.313	0.267	0.359	1.691

Figure 2. Specific emission rate over the first year of year of the meteorological data

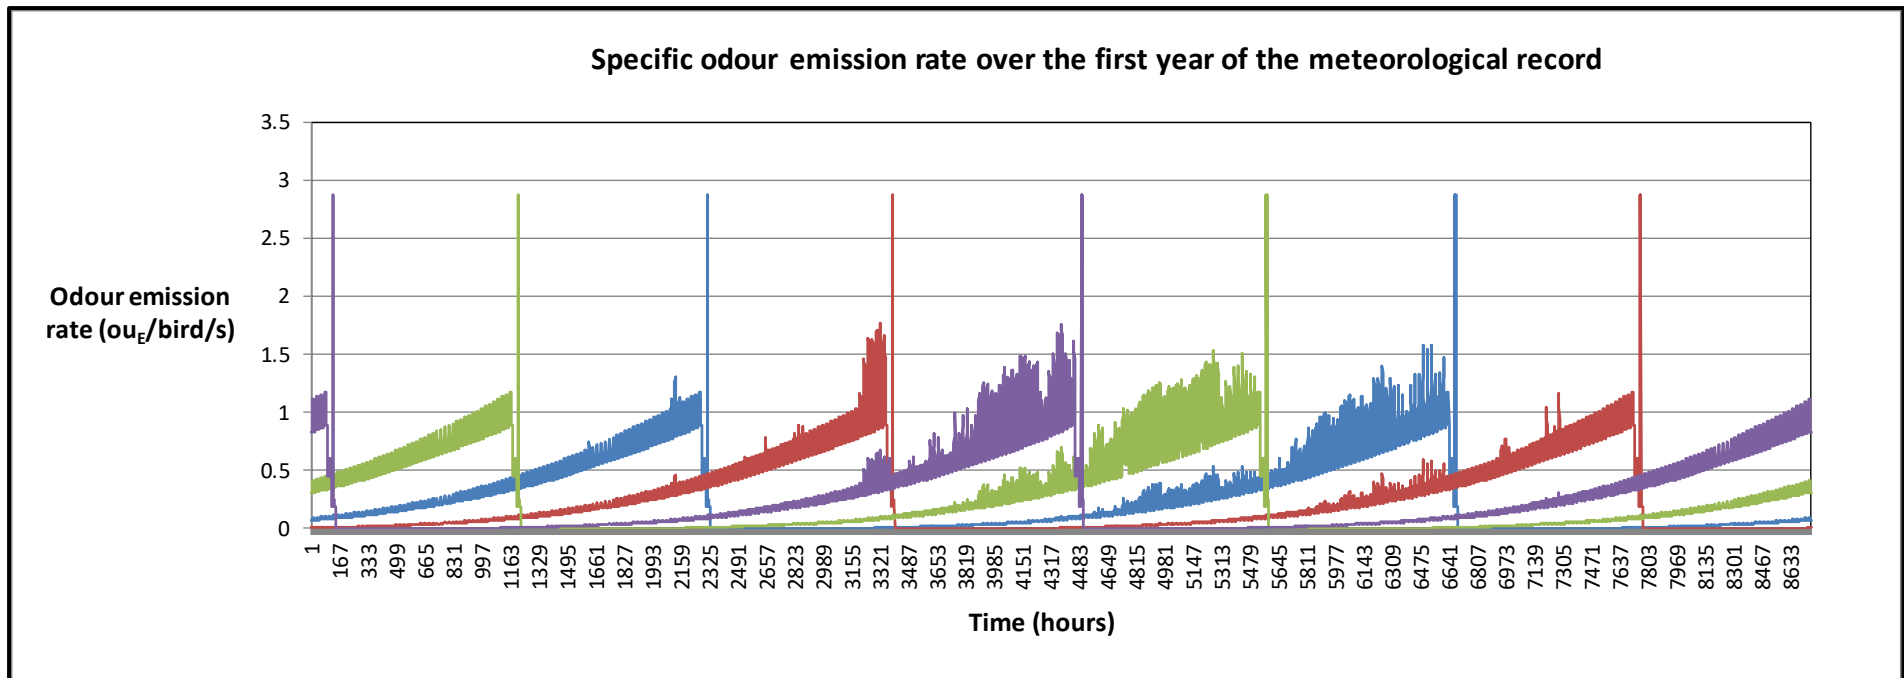

4. The Atmospheric Dispersion Modelling System (ADMS) and Model Parameters

The Atmospheric Dispersion Modelling System (ADMS) ADMS 5 is a new generation Gaussian plume air dispersion model, which means that the atmospheric boundary layer properties are characterised by two parameters; the boundary layer depth and the Monin-Obukhov length rather than in terms of the single parameter Pasquill-Gifford class.

Dispersion under convective meteorological conditions uses a skewed Gaussian concentration distribution (shown by validation studies to be a better representation than a symmetrical Gaussian expression).

ADMS has a number of model options including: dry and wet deposition; NO_x chemistry; impacts of hills, variable roughness, buildings and coastlines; puffs; fluctuations; odours; radioactivity decay (and γ -ray dose); condensed plume visibility; time varying sources and inclusion of background concentrations.

ADMS has an in-built meteorological pre-processor that allows flexible input of meteorological data both standard and more specialist. Hourly sequential and statistical data can be processed and all input and output meteorological variables are written to a file after processing.

The user defines the pollutant, the averaging time (which may be an annual average or a shorter period), which percentiles and exceedance values to calculate, whether a rolling average is required or not and the output units. The output options are designed to be flexible to cater for the variety of air quality limits, which can vary from country to country and are subject to revision.

4.1 Meteorological data

Computer modelling of dispersion requires hourly sequential meteorological data and to provide robust statistics, the record should be of a suitable length; preferably four years or longer.

The meteorological data used in this study is obtained from assimilation and short term forecast fields of the Numerical Weather Prediction (NWP) system known as the Global Forecast System (GFS). Data from the meteorological stations at Sennybridge, Shobdon and Trawscoed have also been considered.

The GFS is a spectral model and data are archived at a horizontal resolution of 0.25 degrees, which is approximately 25 km over the UK (formerly 0.5 degrees, or approximately 50 km). The GFS resolution adequately captures major topographical features and the broad-scale characteristics of the weather over the UK. Smaller scale topological features may be included in the dispersion modelling by using the flow field module of ADMS (FLOWSTAR). The use of NWP data has advantages over traditional meteorological records because:

- Calm periods in traditional observational records may be over represented, this is because the instrumentation used may not record wind speeds below approximately 0.5 m/s and start up wind speeds may be greater than 1.0 m/s. In NWP data, the wind speed is continuous down to 0.0 m/s, allowing the calms module of ADMS to function correctly.
- Traditional records may include very local deviations from the broad-scale wind flow that would not necessarily be representative of the site being modelled; these deviations are difficult to identify and remove from a meteorological record. Conversely, local effects at the site being modelled are relatively easy to impose on the broad-scale flow and provided horizontal resolution is not too great, the meteorological records from NWP data may be expected to represent well the broad-scale flow.
- Information on the state of the atmosphere above ground level which would otherwise be estimated by the meteorological pre-processor may be included explicitly.

The wind rose for the raw GFS data at the site of the poultry unit is shown in Figure 3a.

Wind speeds are modified by the treatment of roughness lengths (see Section 4.7) and because terrain data is included in the modelling, wind speeds and directions will be modified. The terrain and roughness length modified wind rose for the area around Garn Farm is shown in Figure 3b. Note that elsewhere in the modelling domain modified wind roses may differ more markedly and that the resolution of the wind field in terrain runs is 100 m. In addition, the wind roses for the data recorded at Sennybridge, Shobdon and Trawscoed are shown in Figures 3c, 3d and 3e respectively.

Figure 3a. The wind rose. GFS derived data for 52.428 N, 3.320 W, 2014 – 2017

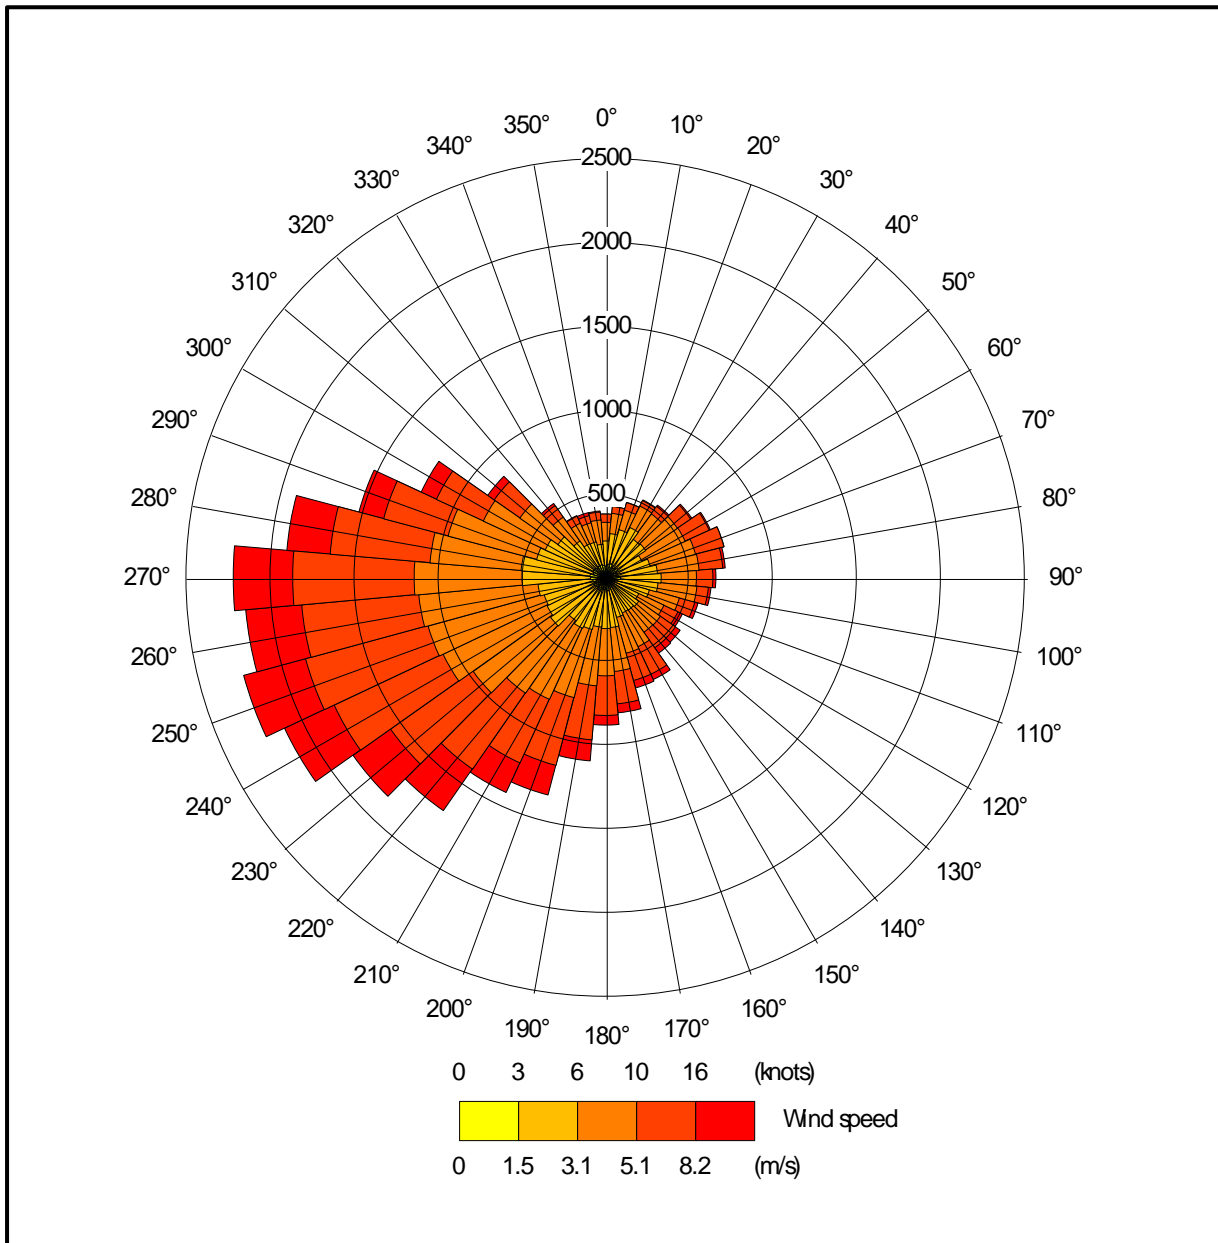


Figure 3b. The wind rose. FLOWSTAR modified GFS data for the site of the poultry unit (NGR 310225, 281860)

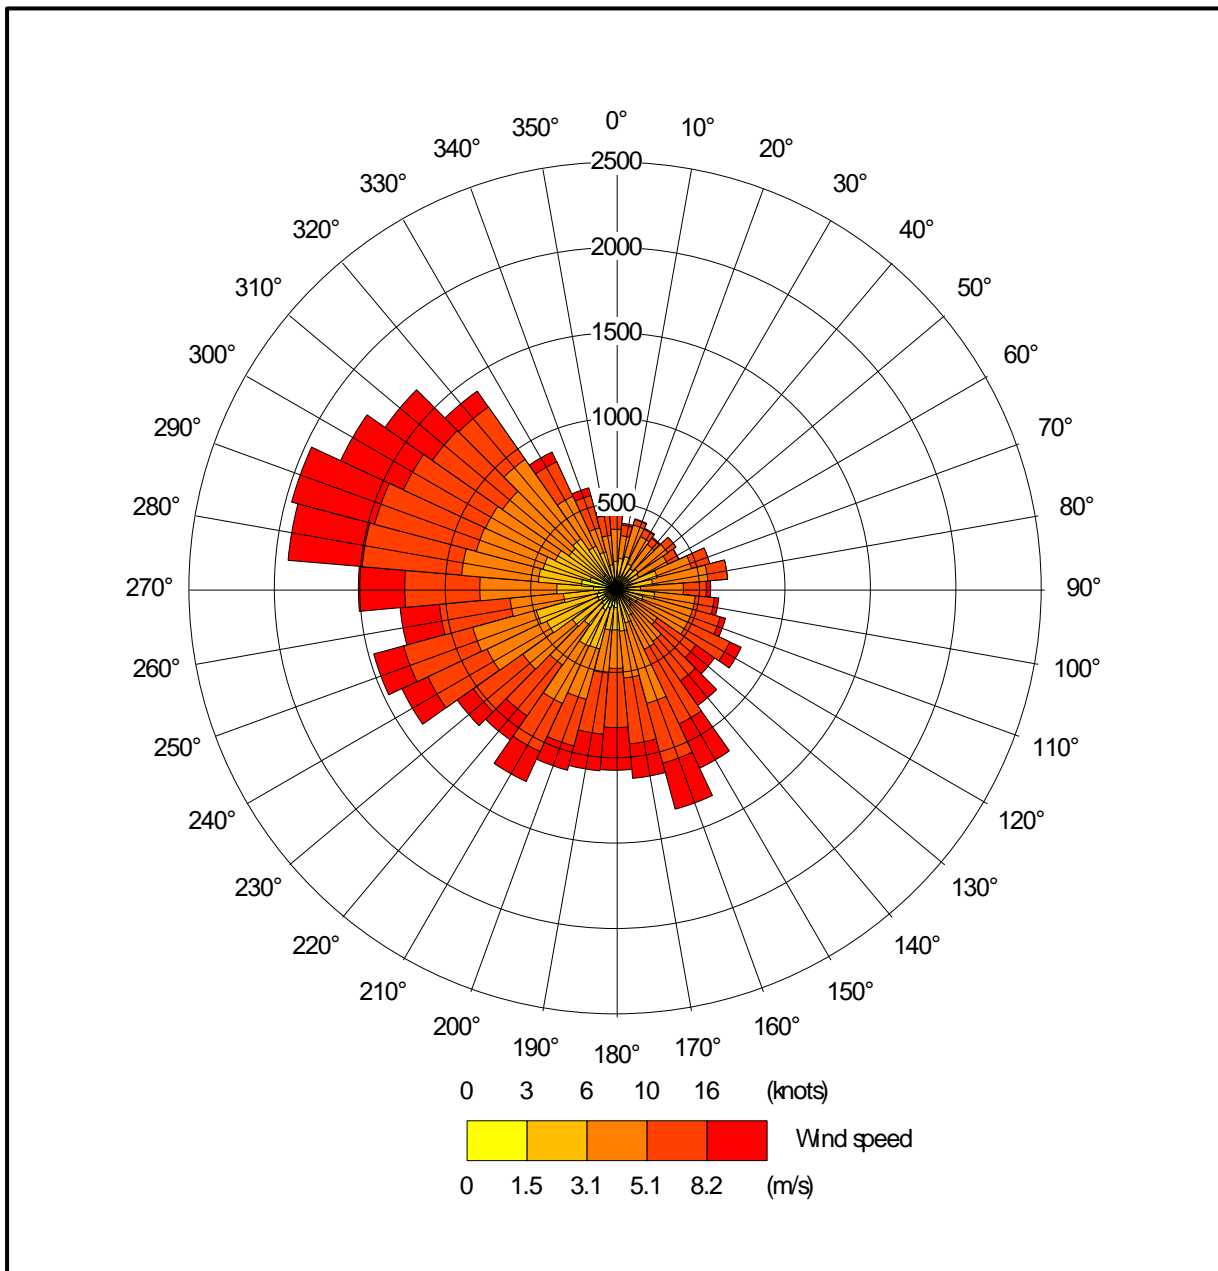


Figure 3c. The wind rose. Derived data from the Sennybridge weather station, 2014-2017

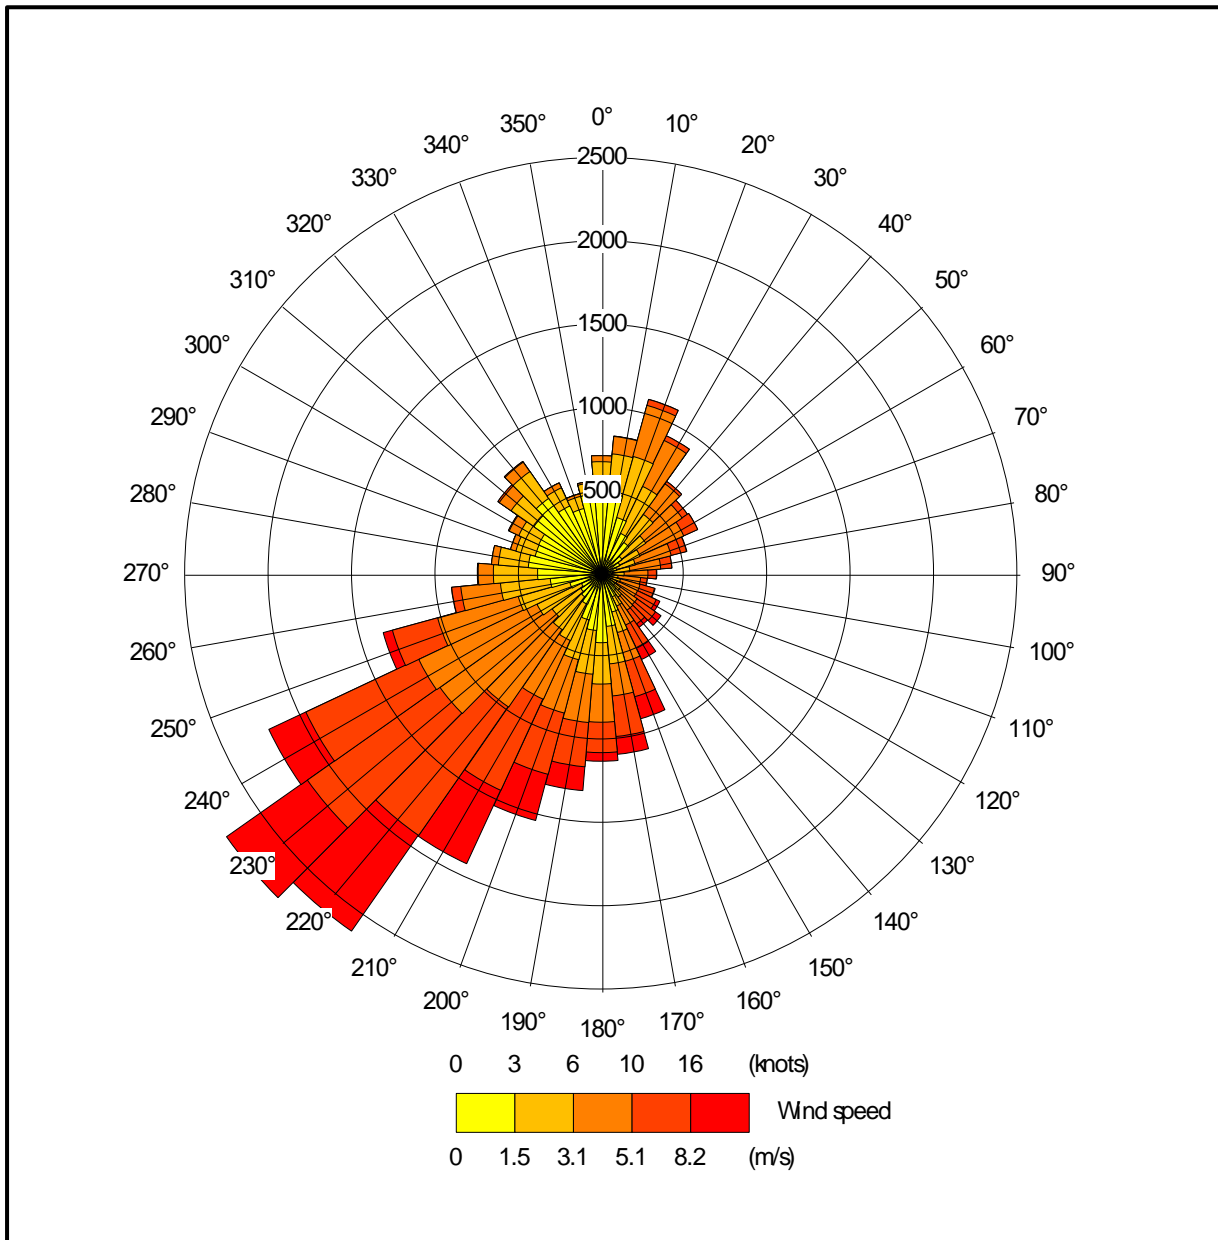


Figure 3d. The wind rose. Derived data from the Shobdon weather station, 2014-2017


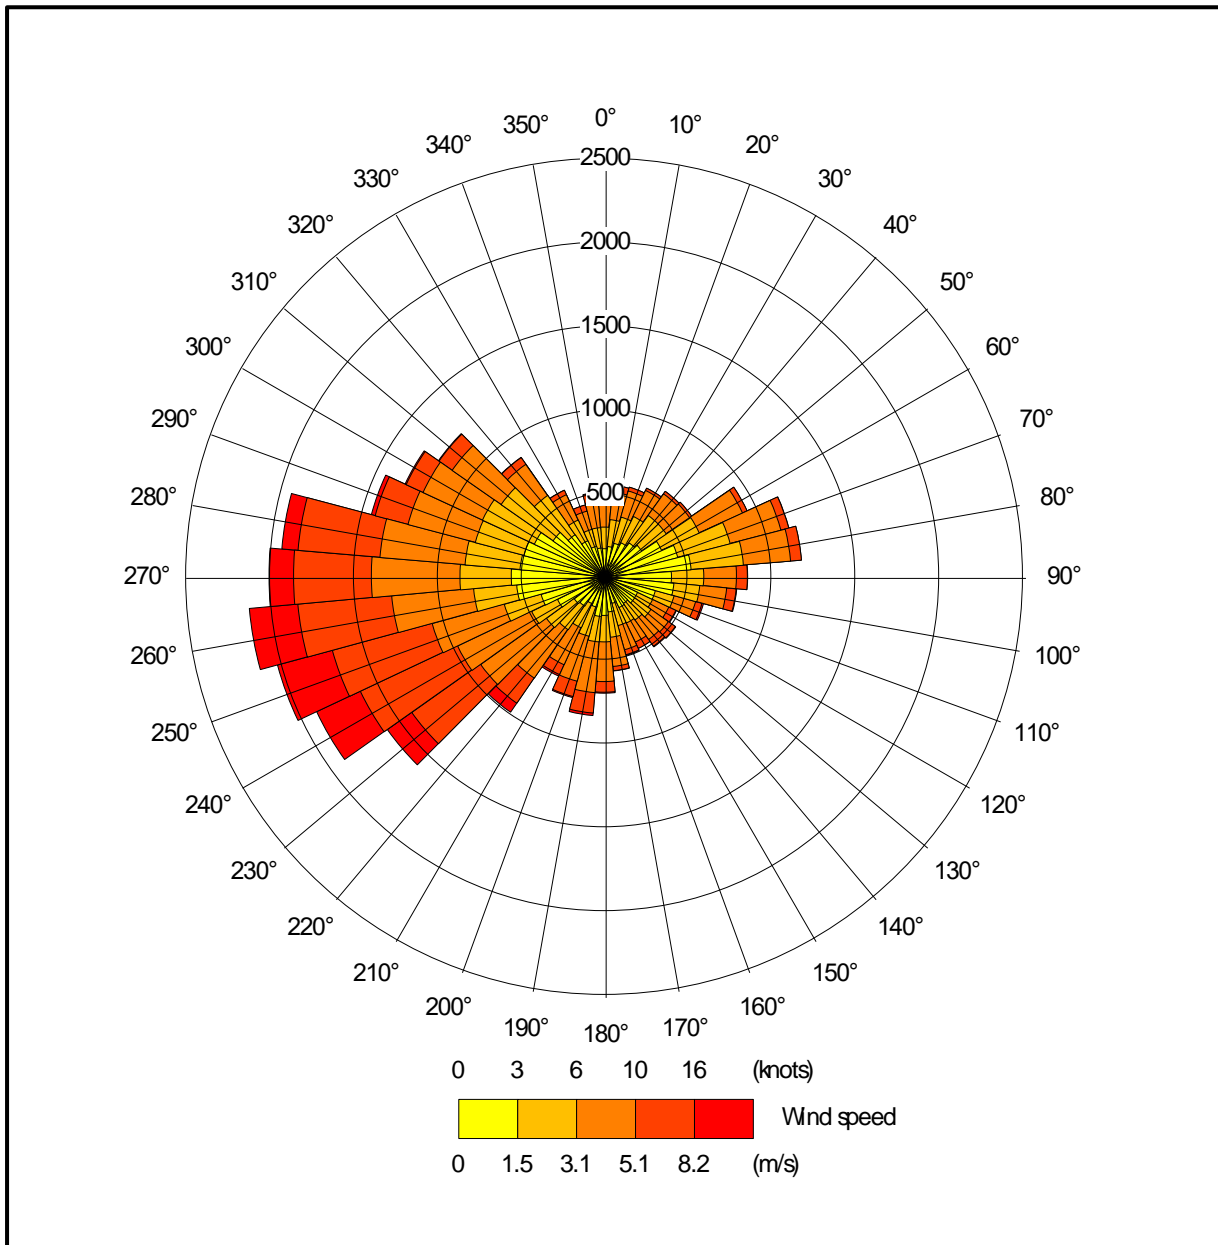


Figure 3e. The wind rose. Derived data from the Trawscoed weather station, 2014-2017

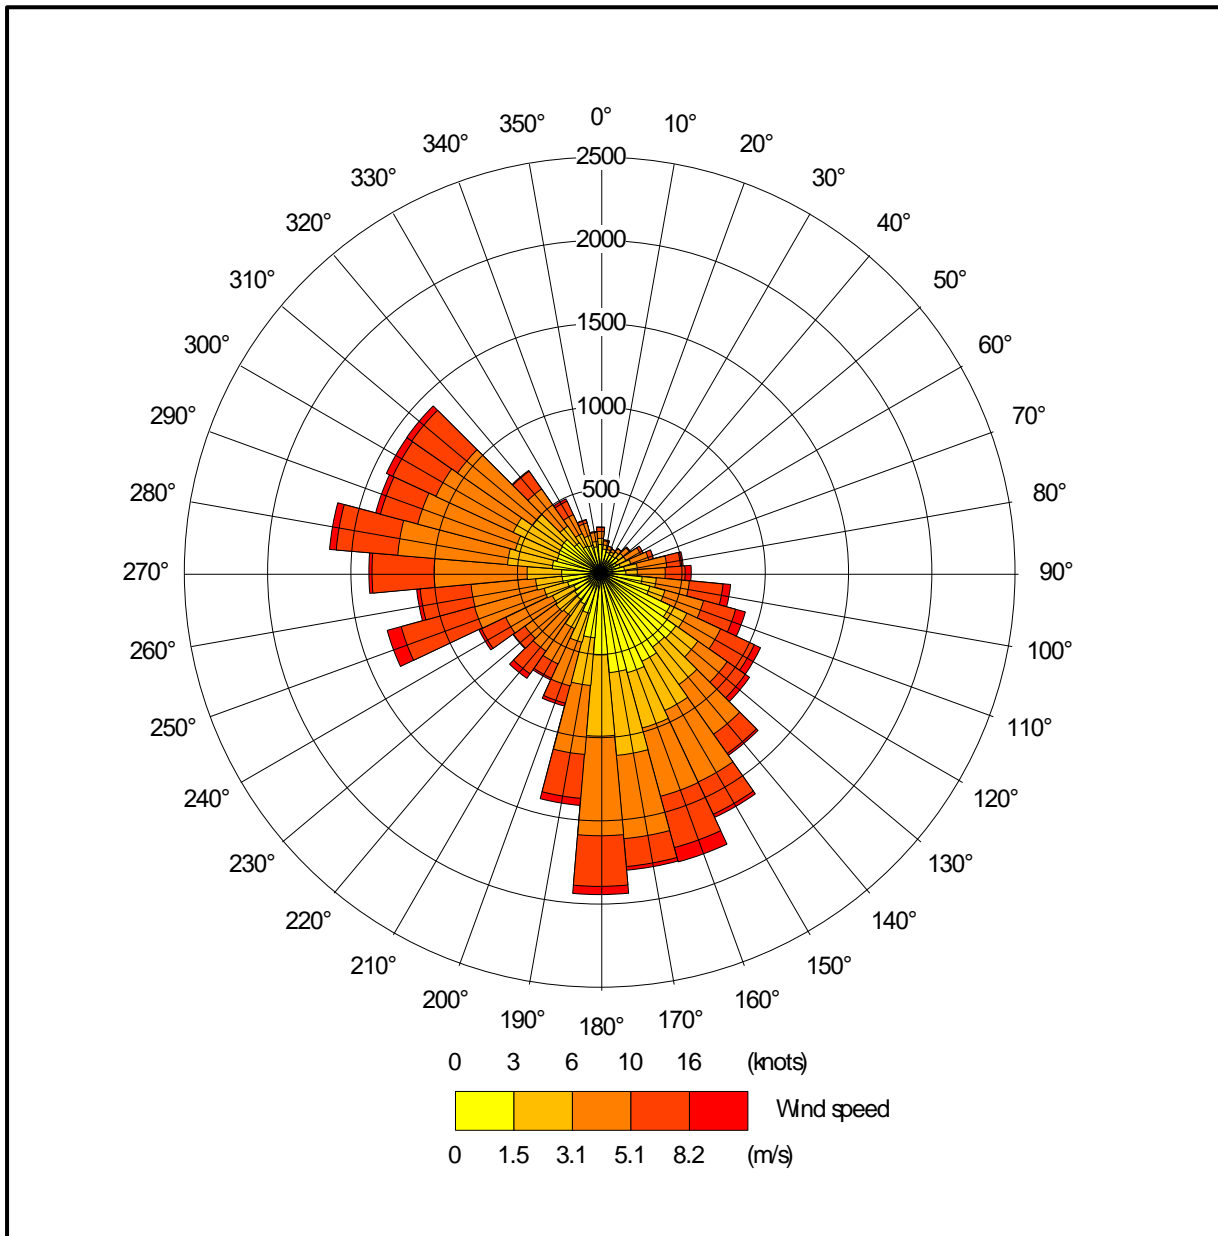

4.2 Emission sources

Emissions from the chimneys of the uncapped high speed ridge or roof fans that would be used for the ventilation of the proposed poultry houses are represented by three point sources per house within ADMS (PR1 and PR2 a, b & c). Details of the point source parameters are shown in Table 2 and their positions may be seen in Figure 4, where they are marked by red stars.

Table 2. Point source parameters

Source ID	Height (m)	Diameter (m)	Efflux velocity (m/s)	Emission temperature (°C)	Emission rate per source (OU _E /s)
PR1 a, b & c	6.5	0.8	11.0	Variable ¹	Variable ¹
PR2 a, b & c	6.5	0.8	11.0	Variable ¹	Variable ¹

1. Dependent on crop stage and ambient temperature.

4.3 Modelled buildings

The structure of the proposed poultry houses and other nearby buildings may affect the odour plumes from the point sources; therefore, the buildings are modelled within ADMS. The positions of the modelled buildings may be seen in Figure 4, where they are marked by grey rectangles.

4.4 Discrete receptors

Fourteen discrete receptors have been defined at a selection of nearby residences and commercial properties. The receptors are defined at 1.5 m above ground level within ADMS and their positions may be seen in Figure 5 where they are marked by enumerated pink rectangles.

4.5 Nested Cartesian grid

To produce the contour plots presented in Section 5 of this report, a nested Cartesian grid has been defined within ADMS. The grid receptors are defined at 1.5 m above ground level within ADMS. The positions of the receptors may be seen in Figure 5, where they are marked by green crosses bounded by a purple rectangle.


4.6 Terrain data

Terrain has been considered in the modelling. The terrain data are based upon the Ordnance Survey 50 m Digital Elevation Model. A 6.4 km x 6.4 km domain has been resampled at 50 m horizontal resolution for use within ADMS. N.B. The resolution of FLOWSTAR is 64 x 64 grid points; therefore, the effective resolution of the wind field for the terrain runs is 100 m.

4.7 Other model parameters


A fixed surface roughness length of 0.2 m has been applied over the entire modelling domain. As a precautionary measure, the GFS meteorological data is assumed to have a roughness length of 0.175 m. The effect of the difference in roughness length is precautionary as it increases the frequency of low wind speeds and the stability and therefore increases predicted ground level concentrations.

Figure 4. The positions of modelled buildings & sources

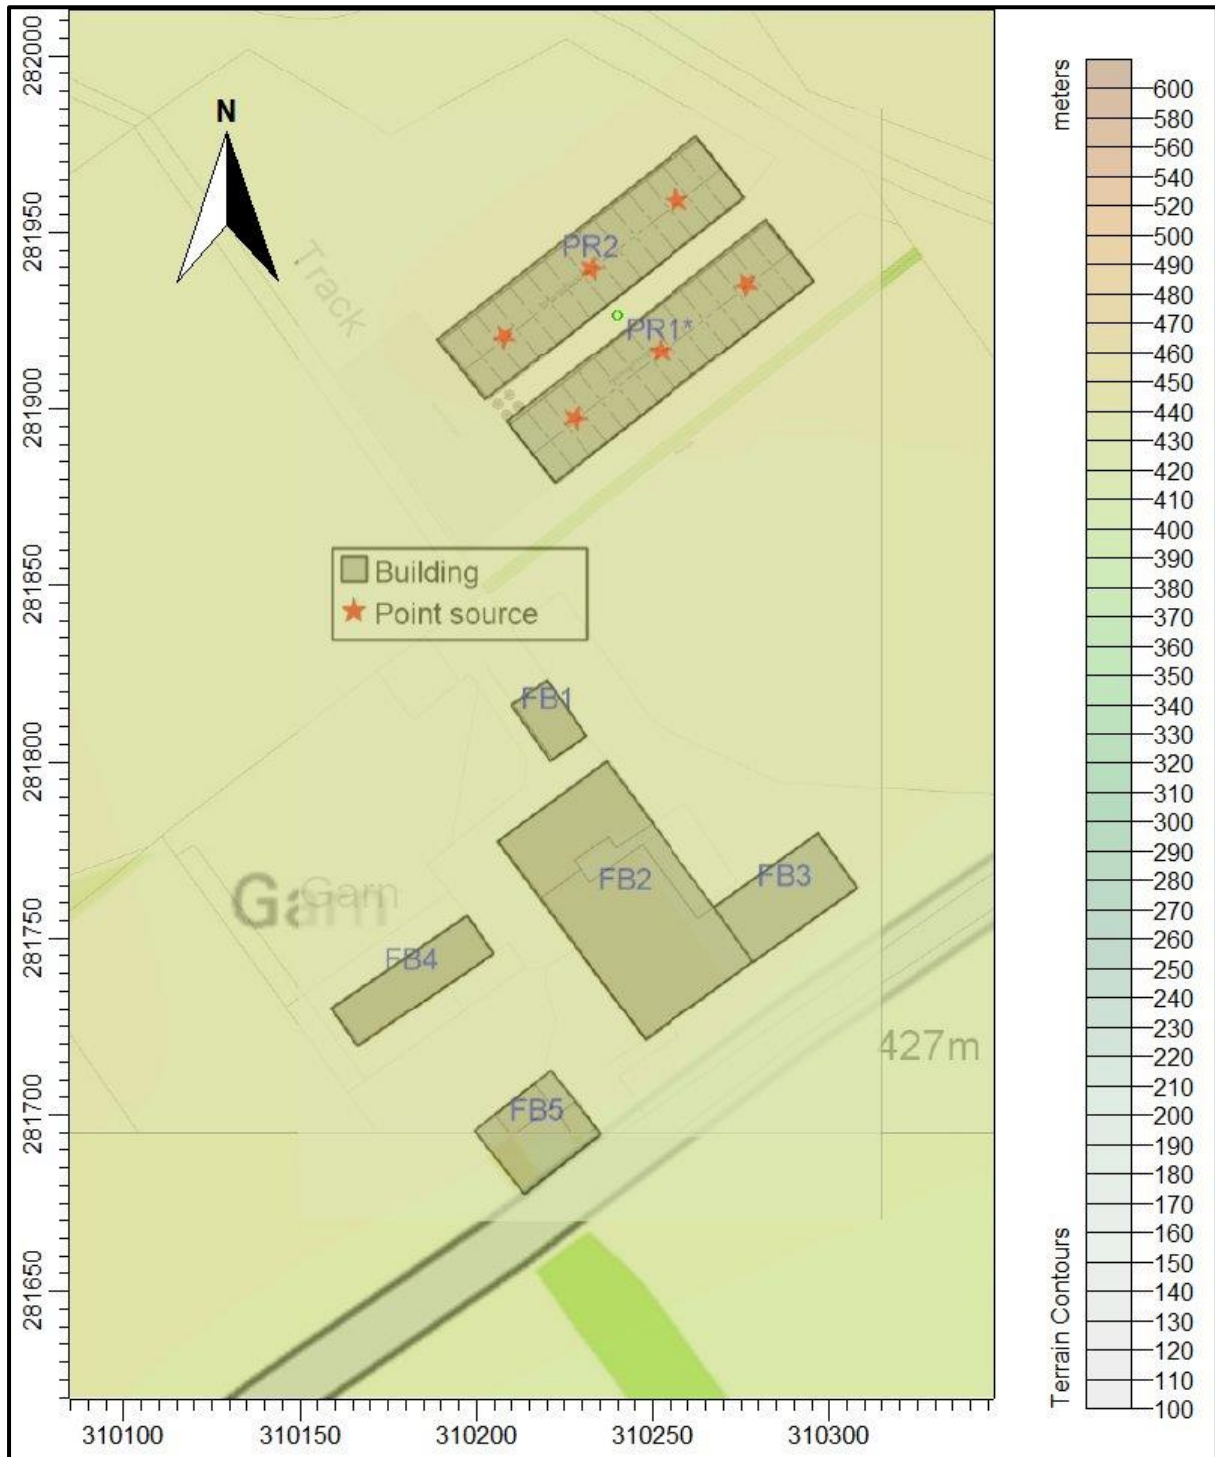

© Crown copyright and database rights 2018.

Figure 5. The discrete receptors and nested Cartesian grid receptors

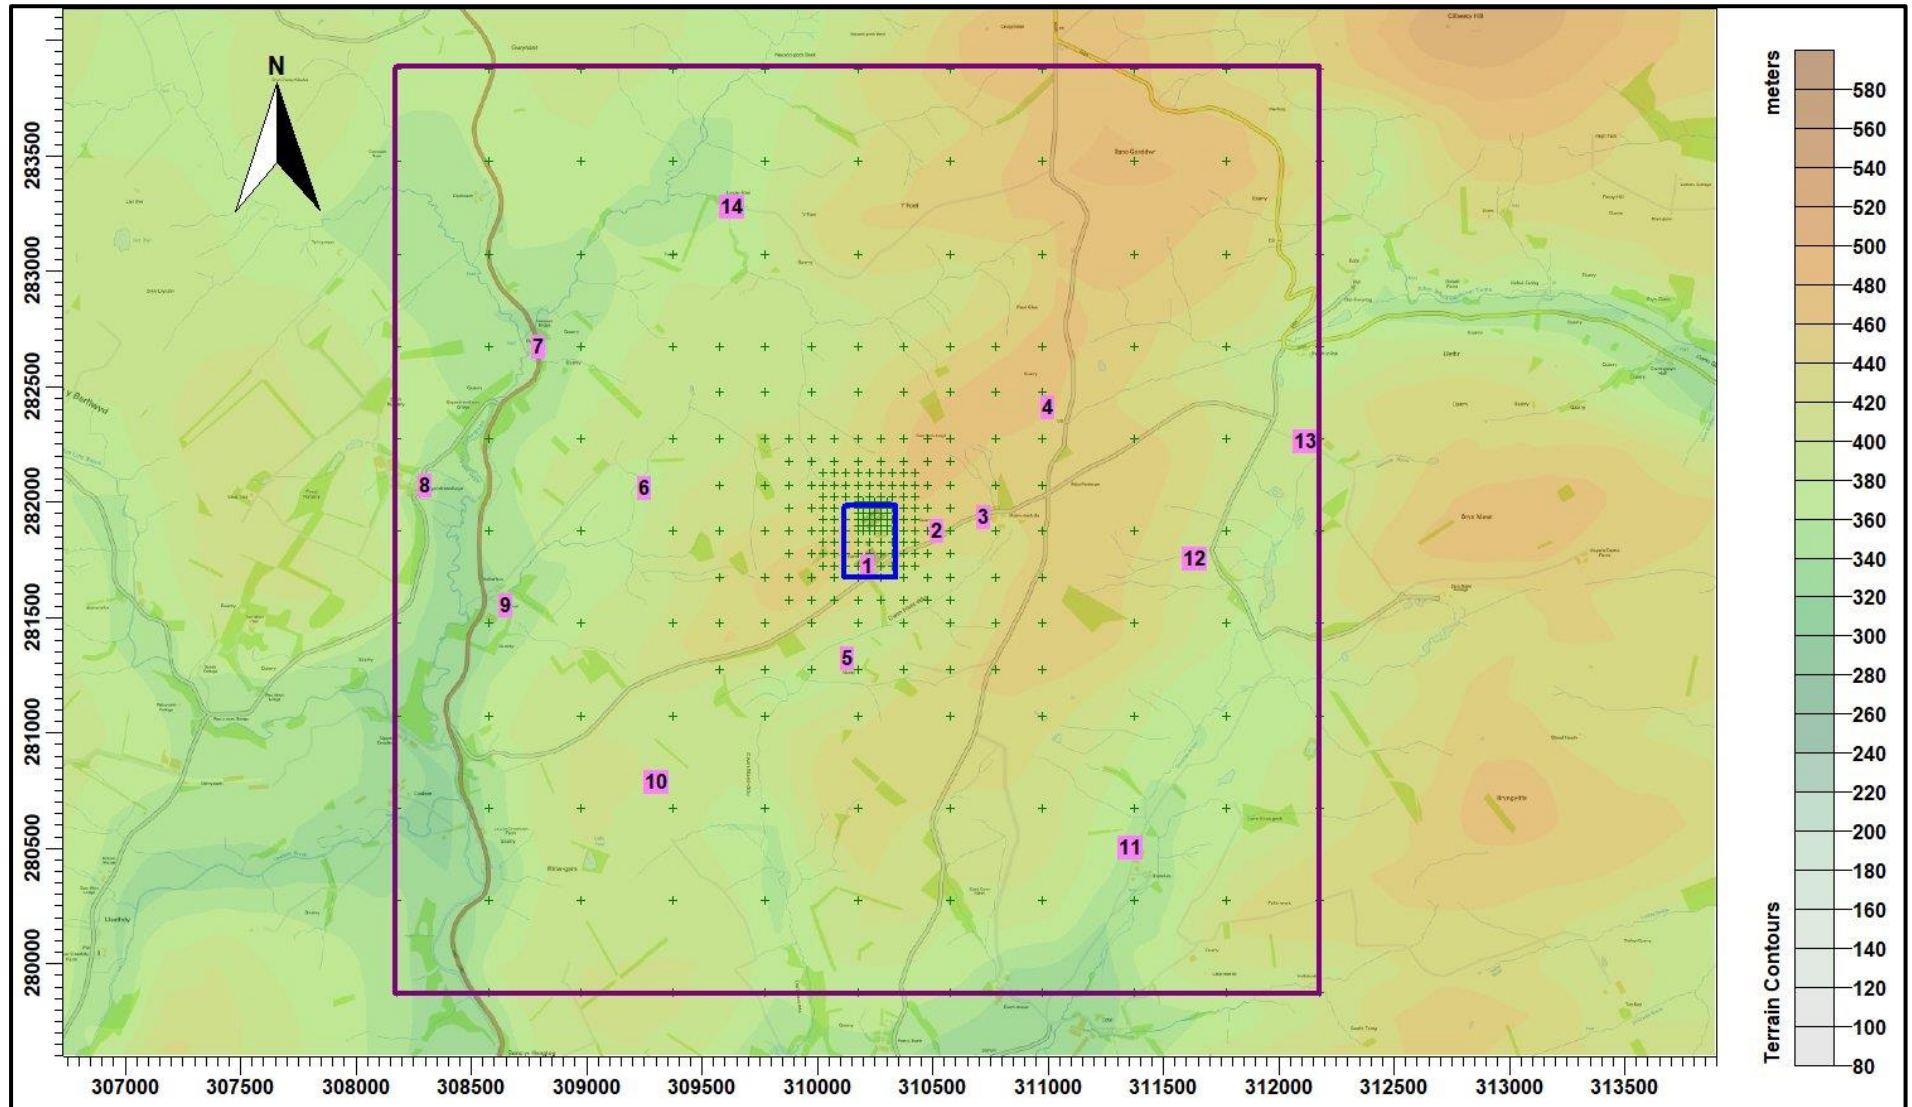

© Crown copyright and database rights 2018.

5. Details of the Model Runs and Results

For this study, ADMS was run with calms module of ADMS and with terrain. ADMS was run a total of sixteen times, once for each year of the four year meteorological record in the following four modes:

- GFS meteorological data.
- Recorded meteorological data from the Sennybridge weather station.
- Recorded meteorological data from the Shobdon weather station.
- Recorded meteorological data from the Trawscoed weather station.

Statistics for the annual 98th percentile hourly mean odour concentration at each receptor were compiled for each of the sixteen runs.


A summary of the results at the discrete receptors is shown in Table 3, where the maximum annual 98th percentile hourly mean odour for each mode is shown. A contour plot of the maximum annual 98th percentile hourly mean odour concentration for proposed poultry houses is shown in Figures 6.

In Table 3, predicted odour exposures in excess of the Environment Agency's benchmark of 3.0 ou_E/m³ as an annual 98th percentile hourly mean are coloured blue; those in the range that UKWIR research suggests gives rise to a significant proportion of complaints, 5.0 ou_E/m³ to 10.0 ou_E/m³ as an annual 98th percentile hourly mean, are coloured orange and predicted exposures likely to cause annoyance and complaint, those in excess of 10.0 ou_E/m³ as an annual 98th percentile hourly mean, are coloured red.

Table 3. Predicted maximum annual 98th percentile hourly mean odour concentrations at the discrete receptors

Receptor number	X(m)	Y(m)	Site	Maximum annual 98 th percentile hourly mean odour concentration (ouE/m ³)			
				GFS Calms Terrain	Sennybridge Calms Terrain	Shobdon Calms Terrain	Trawscoed Calms Terrain
1	310220	281721	Garn Farmhouse	1.05	1.64	0.81	0.13
2	310516	281873	Residence	1.97	1.04	1.98	1.97
3	310721	281934	Blaen-nant-du	1.07	0.61	1.09	0.81
4	311001	282410	Residence	0.31	0.35	0.26	0.20
5	310131	281321	Nanty	0.29	0.30	0.24	0.04
6	309250	282060	Agricultural building	0.16	0.06	0.11	0.15
7	308794	282673	PW A483	0.06	0.03	0.04	0.06
8	308299	282071	Esgairdraenllwyn	0.05	0.02	0.04	0.05
9	308651	281550	Hafod	0.13	0.08	0.18	0.06
10	309304	280783	Agricultural building	0.05	0.05	0.05	0.01
11	311357	280503	Gwenlas	0.06	0.10	0.12	0.10
12	311636	281751	Residence	0.14	0.07	0.17	0.12
13	312114	282262	Waen	0.13	0.08	0.16	0.08
14	309630	283277	Lower Foel	0.08	0.07	0.05	0.15

Figure 6. Predicted maximum annual 98th percentile hourly mean odour concentration

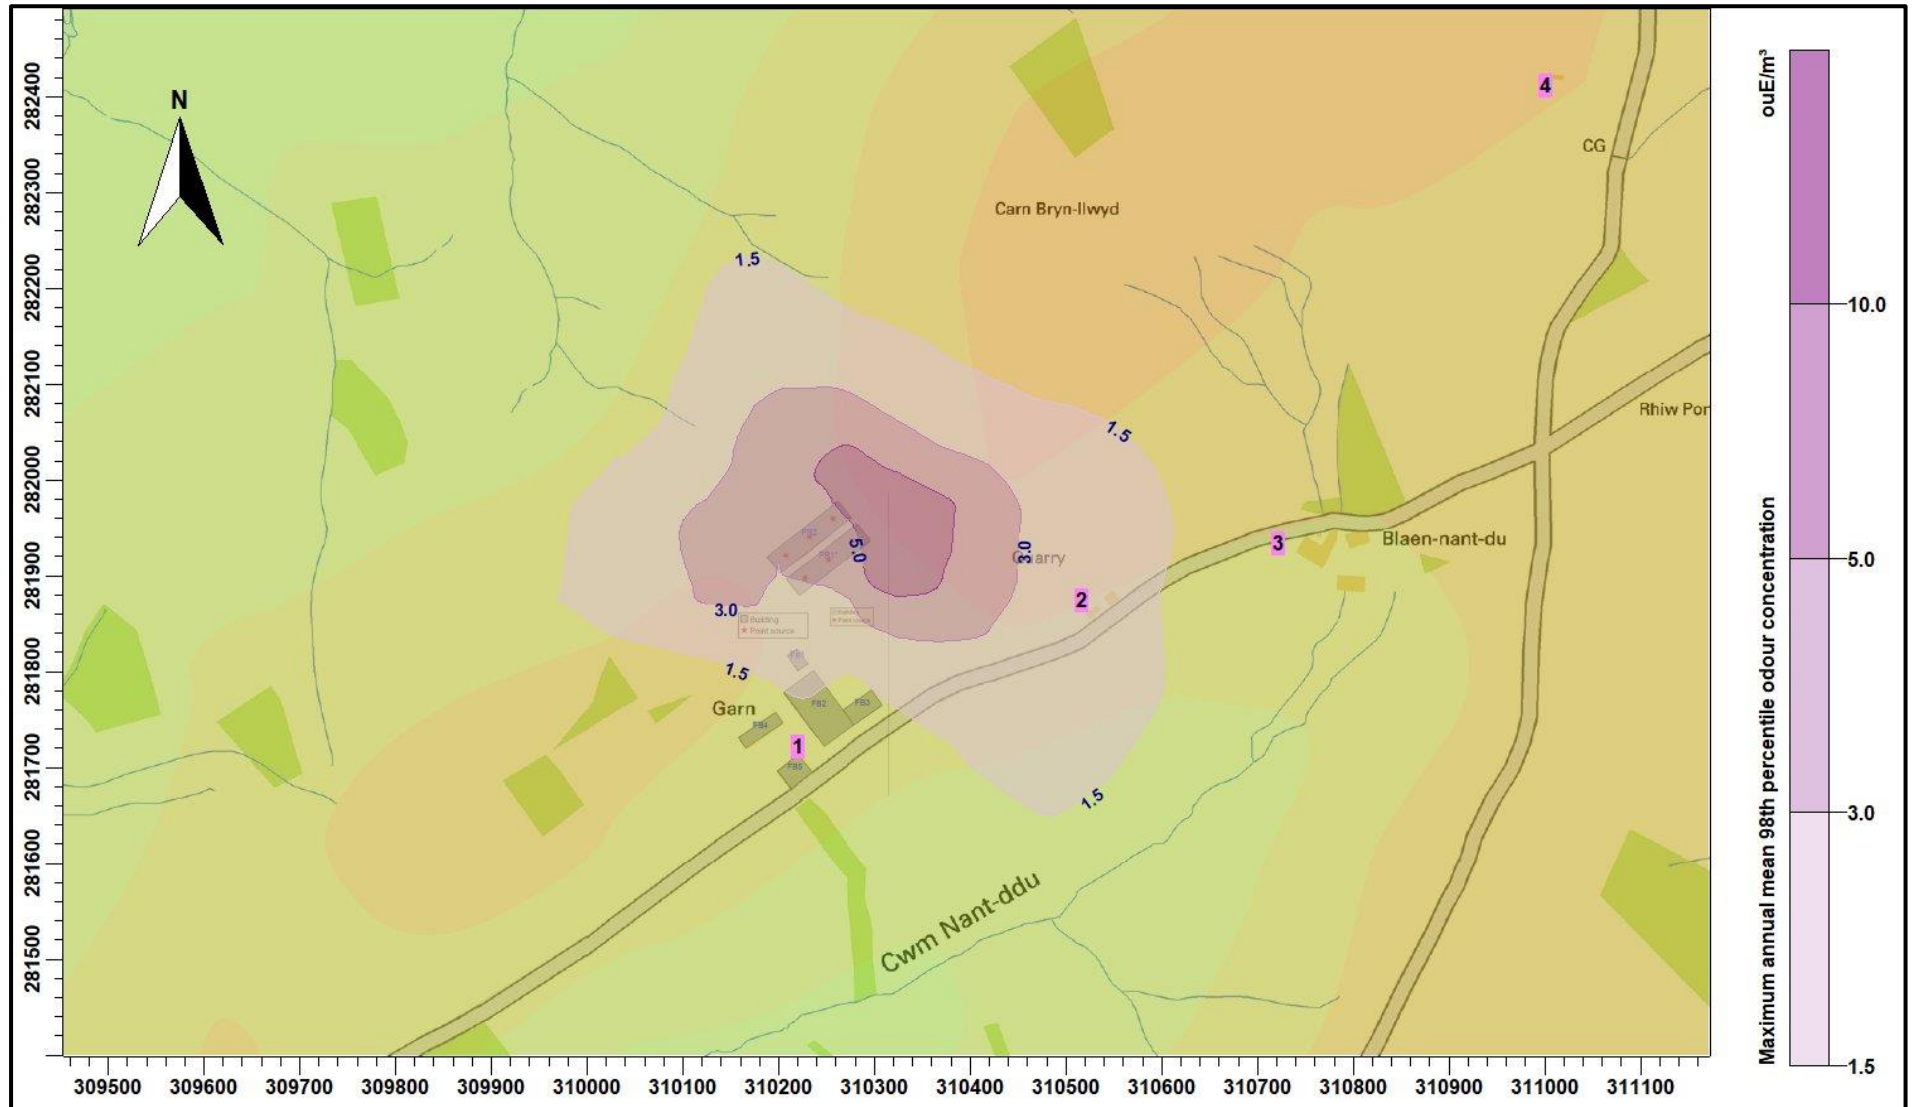

© Crown copyright and database rights 2018.

6. Summary and Conclusions

AS Modelling & Data Ltd. has been instructed by Gail Lewis of Roger Parry & Partners LLP, on behalf of the applicant V. E. Lewis & Son, to use computer modelling to assess the impact of odour emissions from the proposed pullet chicken rearing houses at Garn Farm, Llanbadarn Fynydd, Llandrindod Wells, Powys. LD1 6YE.

Odour emission rates from the proposed poultry houses have been assessed and quantified based upon an emissions model that takes into account the likely internal odour concentrations and ventilation rates of the poultry houses. The odour emission rates so obtained have then been used as inputs to an atmospheric dispersion model which calculates odour exposure levels in the surrounding area.

The results of the modelling indicate that the process contribution of the proposed pullet rearing unit at Garn Farm to local odour concentrations would not exceed the Environment Agency's benchmark for moderately offensive odours, a 98th percentile hourly mean of 3.0 ou_E/m³ over a one year period at any of the discrete receptors considered.

7. References

Chartered Institution of Water and Environmental Management website. Control of Odour.
<http://www.ciwem.org/policy-and-international/policy-position-statements/control-of-odour.aspx>

Defra. Heat Stress in Poultry - Solving the Problem

Environment Agency, April 2007. H4 Odour Management, How to comply with your environmental permit.

<http://a0768b4a8a31e106d8b0-50dc802554eb38a24458b98ff72d550b.r19.cf3.rackcdn.com/geho0411btqm-e-e.pdf>

R. E. Lacey, S. Mukhtar, J. B. Carey and J. L. Ullman, 2004. A Review of Literature Concerning Odors, Ammonia, and Dust from Broiler Production Facilities.

<http://iaqr.fass.org/content/13/3/500.full.pdf+html>

S. Fournela, F. Pelletierb, S. Godboutb. Odour emissions, hedonic tones and ammonia emissions from three cage layer housing systems.

Nimmermark S. & Gustafsson G. Influence of Temperature, Humidity and Ventilation Rate on the Release of Odour and Ammonia in a Floor Housing System for Laying Hens.

Fardausur Rahaman et al. ESTIMATION OF ODOUR EMISSIONS FROM BROILER FARMS
– AN ALTERNATIVE APPROACH

A. P. Robertson *et al*, 2002. Commercial-scale Studies of the Effect of Broiler-protein Intake on Aerial Pollutant Emissions.

ROSS. Environmental Management in the Broiler House