



INFINIS ENERGY SERVICES LIMITED

Periodic monitoring of raw landfill gas

Silent Valley Landfill Site

Report LS0180412-TG

Date 3 May 2018

Issue 1



## PERIODIC MONITORING OF RAW LANDFILL GAS

### SILENT VALLEY LANDFILL SITE

Report prepared for

Infinis Energy Services Limited  
500 Pavilion Drive  
Northampton Business Park  
Northamptonshire  
NN4 7YJ

Report prepared by

SOCOTEC UK Limited  
Unit D  
Bankside Business Park  
Cirencester  
Gloucestershire  
GL7 1YT

Approved Dr N Ford

*N Ford*

---

## Issue history

---

Issue	Date	Approved
LS0180412-TG, 1	3 May 2018	N Ford
First issue		N Ford

This Report has been prepared by SOCOTEC UK Limited with all reasonable skill and care, within the terms and conditions of the contract between SOCOTEC UK Limited and the Client ("Contract") and within the limitations of the resources devoted to it by agreement with the Client. Any reliance upon the Report is subject to the Contract terms and conditions.

This Report is confidential between the Client and SOCOTEC UK Limited. SOCOTEC UK Limited accepts no responsibility whatsoever to third parties to whom this document, or any part thereof, is made known. Any such party relies upon the Report at their own risk. The Contracts (Rights of Third Parties) Act 1999 does not apply to this Report nor the Contract and the provisions of the said Act are hereby excluded.

This Report shall not be used for engineering or contractual purposes unless signed above by the author, checker and the approver for and on behalf of SOCOTEC UK Limited and unless the Report status is 'Final'.

Unless specifically assigned or transferred within the terms and conditions of the Contract, SOCOTEC UK Limited asserts and retains all Copyright and other Intellectual Property Rights in and over the Report and its contents. The Report may not be copied or reproduced, in whole or in part, without the written authorisation from SOCOTEC UK Limited. SOCOTEC UK Limited shall not be liable for any use of the Report for any purpose other than that for which it was originally prepared.

Whilst every effort has been made to ensure the accuracy of the data supplied and any analysis interpretation derived from it, the possibility exists of variations in the ground and groundwater conditions around and between the exploratory positions. No liability can be accepted for any such variations in these conditions. Furthermore, any recommendations are specific to the development as detailed in this Report and no liability will be accepted should they be used for the design of alternative schemes without prior consultant with SOCOTEC UK Limited

## 1 Introduction

Infinis Energy Services Limited (Infinis) contracted SOCOTEC UK Limited (SOCOTEC) to undertake monitoring of the landfill gas supply to its combustion operations at the Silent Valley Landfill site.

## 2 Test methodology

Infinis requested that duplicate samples of landfill gas be collected and analysed for the priority trace components (LFGTGN04, Table 1.1) specified in Environment Agency guidance (Guidance for monitoring trace components in landfill gas – LFGTGN04 v3.0, 2010). The test methodology should be in accordance with that specified within LFGTGN04.

Based on LFGTGN04 the priority trace gas components are sampled using a combination of four sampling media as shown in Table 1.

Table 1 Sampling media and analytical methods

Trace component	CAS number	Sampling method	Analytical method
1,1-dichloroethane	75-34-3	Dual solid sorbent	ATD-GC-MS
1,2-dichloroethane	107-06-2	Dual solid sorbent	ATD-GC-MS
1,1-dichloroethene	75-35-4	Dual solid sorbent	ATD-GC-MS
1,2-dichloroethene	540-59-0	Dual solid sorbent	ATD-GC-MS
1,3-butadiene	106-99-0	Dual solid sorbent	ATD-GC-MS
1-butanethiol	109-79-5	Dual solid sorbent	ATD-GC-MS
1-pentene	109-67-1	Dual solid sorbent	ATD-GC-MS
1-propanethiol	107-03-9	Dual solid sorbent	ATD-GC-MS
2-butoxyethanol	111-76-2	Dual solid sorbent	ATD-GC-MS
Arsenic (as As)	7440-38-2	Charcoal	ICP-MS
Benzene	71-43-2	Dual solid sorbent	ATD-GC-MS
Butyric acid	107-92-6	Dual solid sorbent	ATD-GC-MS
Carbon disulphide	75-15-0	Dual solid sorbent	ATD-GC-MS
Chloroethane	75-00-3	Dual solid sorbent	ATD-GC-MS
Chloroethene (vinyl chloride)	75-01-4	Dual solid sorbent	ATD-GC-MS
Dichloromethane	75-09-2	Dual solid sorbent	ATD-GC-MS
Dimethyl disulphide	624-92-0	Dual solid sorbent	ATD-GC-MS
Dimethyl sulphide	75-18-3	Dual solid sorbent	ATD-GC-MS
Ethanal (acetaldehyde)	75-07-0	Silica gel/2,4 DNPH	HPLC-DAD
Ethanethiol	75-08-1	Dual solid sorbent	ATD-GC-MS
Ethyl butyrate	105-54-4	Dual solid sorbent	ATD-GC-MS
Furan (1,4-epoxy-1,3-butadiene)	110-00-9	Dual solid sorbent	ATD-GC-MS
Hydrogen sulphide	7783-06-4	Charcoal	IC
Methanal (formaldehyde)	50-00-0	Silica gel/2,4 DNPH	HPLC-DAD
Methanethiol	74-93-1	Dual solid sorbent	ATD-GC-MS
Styrene	100-42-5	Dual solid sorbent	ATD-GC-MS
Tetrachloromethane	56-23-5	Dual solid sorbent	ATD-GC-MS
Toluene	108-88-3	Dual solid sorbent	ATD-GC-MS
Trichloroethene	79-01-6	Dual solid sorbent	ATD-GC-MS

ATD – automated thermal desorption

GC-MS – gas chromatography and mass spectrometry


ICP-MS – inductively couple plasma/mass spectrometry

HPLC-DAD – high performance liquid chromatography and diode array detection

IC – ion chromatography

Sampling for all components is undertaken simultaneously using a multiple stream sampler as shown in Figure 1.

Figure 1 Landfill gas sampling arrangement

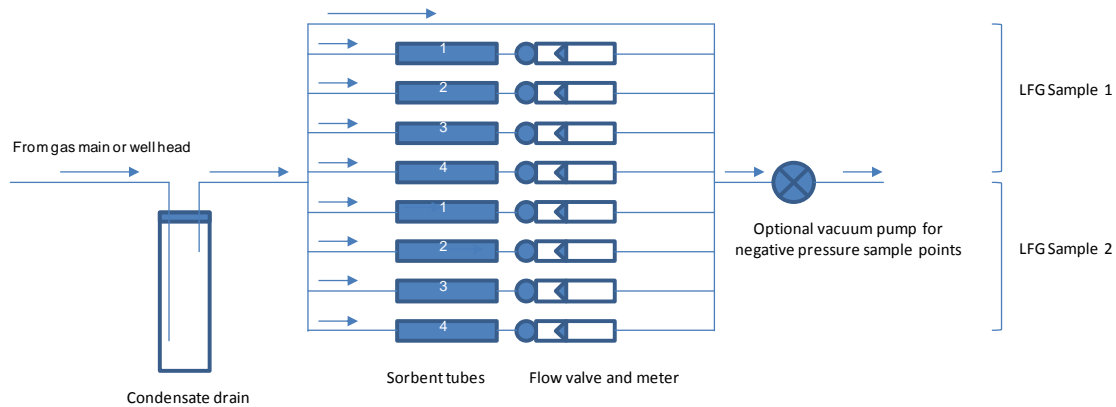

A sample is taken from either the gas main or well head and passed through a condensate drain to remove excess moisture. The sample gas is then split to pass through a series of eight regulated rotameters arranged in two banks of four. There is also a bypass stream for excess sample. This allows the duplicate simultaneous sampling at regulated flow rates onto four sampling media. The flow rates and sampling duration are set in accordance with LFGTGN04 requirements as summarised in Table 2.

Table 2 Sampling media and analytical methods

Media	Target species	Sampling rate (ml/min)	Sampling duration (min)	Sample volume (l)
Dual solid sorbent (Tenax/Sulficarb)	VOCs	20	10	0.2
Silica gel and 2,4 DNPH (SKC 226-119)	Aldehydes	20	50	1.0
Activated carbon 1 (SKC 226-09)	Arsenic	100	50	5.0
Activated carbon 2 (SKC 226-09)	Hydrogen sulphide	100	50	5.0

In the case of negative pressure sources it is necessary to employ a vacuum pump at the sampler's common outlet. This is not normally required with positive pressure systems

This results in two duplicate samples of landfill gas with each sample comprising the four sub-samples above covering all of the priority trace components within Table 1.

The samples are subject to the analytical procedures described in Table 1 to provide a mass on the collected sample which can then be related to the volume of gas sampled to provide a component concentration in the sampled landfill gas.

The sampling followed internal procedure GAS15 and is accredited under test certificate 1015.

### 3 Site information

Sample point details			
Date	19 April 2018	Site	Silent Valley landfill site
Ambient temperature	14°C	Atmospheric pressure	98.2 kPa
Monitoring organisation	SOCOTEC UKAS 1015	Analytical laboratory	SOCOTEC UKAS 1015
Location of sampling point	Gas main to compound After blower	Area of influence of collection system sampled	All
Type of sample point	¼" Tefen	Temperature of gas	23°C
Pressure at sample point	182 mb	Type of waste	Not recorded
Status of gas system	Active	Age of waste	Not recorded

### 4 Preliminary checks and field measurements

Parameter	Concentration
Methane %	40.5
Carbon dioxide %	30
Oxygen %	0.4
Nitrogen (by difference) %	29.1
Hydrogen sulphide ppmv	3.5
Carbon monoxide ppmv	<1

\*carbon monoxide is measured with a hydrogen sulphide filter in the sampling line.

Preliminary bulk gas measurements were undertaken using a Gasdata LMSxi electrochemical cell analyser (no 1227). Reported measurements are spot readings following gas sampling for a period of 5 minutes.

## 5 Results of landfill gas analysis

The results of the sampling and analysis are summarised in Table 3 below.

Table 3 Priority trace component measurement results

Parameter		Concentration ( $\mu\text{g}/\text{m}^3$ ,STP)
1 Pentene		488
1,1-Dichloroethane		43
1,1-Dichloroethylene		<49
1,2-Dichloroethane		<54
1,2-Dichloroethylene		1247
1,3-Butadiene		<38
1,4 epoxy 1,3 butadiene		1627
1-Propanethiol		<108
2-butoxyethanol		<108
Benzene		5965
Butyric acid		<217
Carbon disulphide		8134
Carbon tetrachloride		<54
Chloroethane		<54
Dichloromethane		108
Dimethyl disulphide		3037
Dimethyl sulphide		19520
Ethyl butyrate		<49
Ethyl mercaptan		<163
Methyl mercaptan		<542
N-Butyl mercaptan		<163
Styrene		<54
Toluene		7591
Trichloroethylene		54
Vinyl chloride monomer		542
Arsenic		187
Hydrogen sulphide		80251
Acetaldehyde	*	<108
Formaldehyde	*	108


\* indicates result is UKAS accredited

< indicates result is below the method limit of detection

The above reported results are the maximum concentrations measured for each parameter in two samples.

The maximum results of the current analyses are compared with historical data and the UK database average in Figure 2.

Figure 2 Historical priority trace component analysis results at Silent Valley

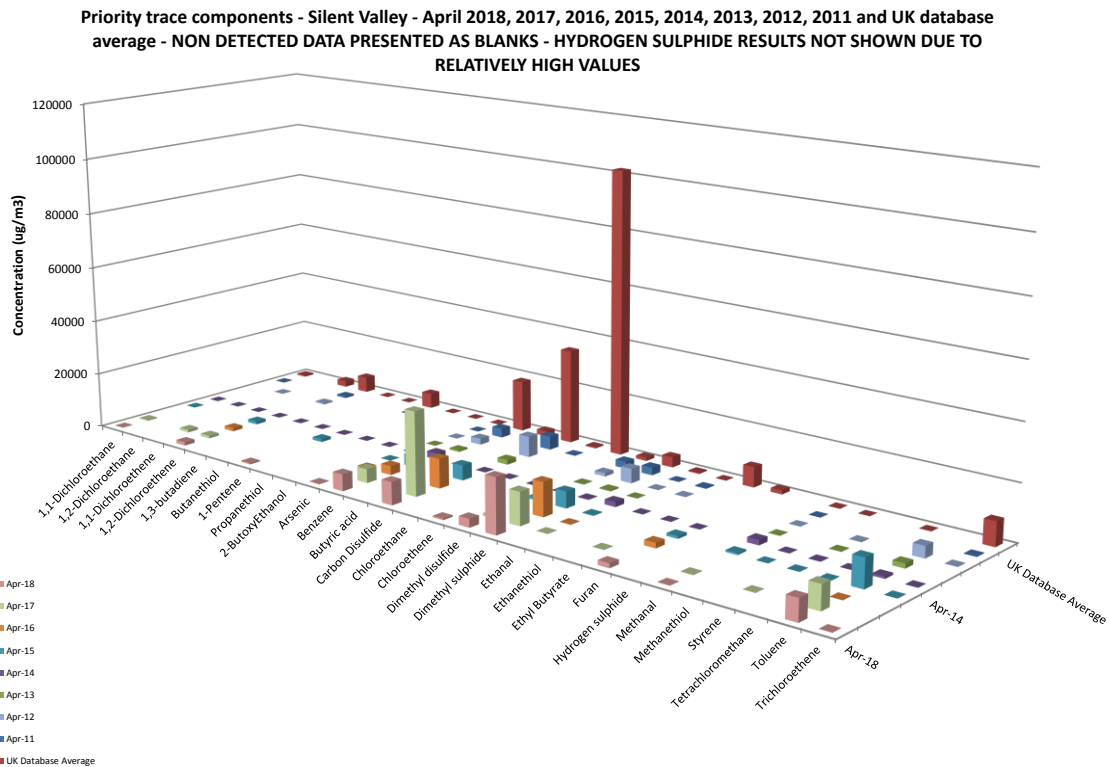

## 6 Notes

Sampling of landfill gas was undertaken in accordance with Socotec procedure GAS15 and is UKAS accredited under certificate 1015.

Analysis of collected samples was undertaken by SOCOTEC's Bretby laboratory. The analytical results which fall within SOCOTEC's scope of accreditation under certificate 1015 are identified in Table 3.

The priority component measurements which can be considered to be within the scope of UKAS accreditation are identified in Table 3.

Any interpretations and opinions expressed are outside of the scope of UKAS accreditation.



**Contact:**

Dr Nick Ford  
SOCOTEC UK Limited  
Bankside Trade Park  
Cirencester  
Gloucestershire  
GL7 1YT  
T: 07768 257628  
E: [nick.ford@socotec.com](mailto:nick.ford@socotec.com)