



Unit 7-8 Hawarden Business Park  
Manor Road (off Manor Lane)  
Hawarden  
Deeside  
CH5 3US

Tel: (01244) 528700

Fax: (01244) 528701

email: hawardencustomerservices@alsglobal.com

Website: www.alsenvironmental.co.uk

Newport City Council  
Civic Centre  
Newport  
NP20 4UR

**Attention:** Meirion Humphreys

## CERTIFICATE OF ANALYSIS

**Date:** 08 January 2018  
**Customer:** H\_NCC\_NPT  
**Sample Delivery Group (SDG):** 171220-4  
**Your Reference:**  
**Location:** Docksway Landfill Site  
**Report No:** 439315

We received 1 sample on Wednesday December 20, 2017 and 1 of these samples were scheduled for analysis which was completed on Monday January 08, 2018. Accredited laboratory tests are defined within the report, but opinions, interpretations and on-site data expressed herein are outside the scope of ISO 17025 accreditation.

Should this report require incorporation into client reports, it must be used in its entirety and not simply with the data sections alone.

Chemical testing (unless subcontracted) performed at ALS Environmental Hawarden (Method codes TM) or ALS Environmental Aberdeen (Method codes S).

Approved By:

**Sonia McWhan**

Operations Manager





# CERTIFICATE OF ANALYSIS

Validated

<b>SDG:</b>	171220-4	<b>Client Reference:</b>		<b>Report Number:</b>	439315
<b>Location:</b>	Docksway Landfill Site	<b>Order Number:</b>	700111791	<b>Superseded Report:</b>	

## Received Sample Overview

Lab Sample No(s)	Customer Sample Ref.	AGS Ref.	Depth (m)	Sampled Date
16793158	C2B		0.00 - 0.00	19/12/2017

**Maximum Sample/Coolbox Temperature (°C) :** 7.8

ISO5667-3 Water quality - Sampling - Part3 -  
During Transportation samples shall be stored in a cooling device capable of maintaining a temperature of (5±3)°C.

ALS have data which show that a cool box with 4 frozen icepacks is capable of maintaining pre-chilled samples at a temperature of (5±3)°C for a period of up to 24hrs.

**Only received samples which have had analysis scheduled will be shown on the following pages.**



# CERTIFICATE OF ANALYSIS

Validated

<b>SDG:</b>	171220-4	<b>Client Reference:</b>	700111791	<b>Report Number:</b>	439315
<b>Location:</b>	Docksway Landfill Site	<b>Order Number:</b>	700111791	<b>Superseded Report:</b>	

<b>Results Legend</b>  <div style="display: flex; gap: 5px;"> <div style="border: 1px solid black; background-color: yellow; width: 15px; height: 15px; display: flex; align-items: center; justify-content: center; margin-right: 5px;">X</div> Test           <div style="border: 1px solid black; background-color: red; width: 15px; height: 15px; display: flex; align-items: center; justify-content: center; margin-right: 5px;">N</div> No Determination Possible         </div>  Sample Types - S - Soil/Solid UNS - Unspecified Solid GW - Ground Water SW - Surface Water LE - Land Leachate PL - Prepared Leachate PR - Process Water SA - Saline Water TE - Trade Effluent TS - Treated Sewage US - Untreated Sewage RE - Recreational Water DW - Drinking Water Non-regulatory UNL - Unspecified Liquid SL - Sludge G - Gas OTH - Other	Lab Sample No(s)						
	Customer Sample Reference						
	AGS Reference						
	Depth (m)	0.00 - 0.00					
	Container	1000ml glass bottle (ALE220)	11plastic (ALE221)	H2SO4 (ALE244)	NaOH (ALE245)	Vial (ALE297)	ZnAc (ALE246)
	Sample Type	LE	LE	LE	LE	LE	LE
	Alkalinity as CaCO3	All	NDPs: 0 Tests: 1	X			
Ammoniacal Nitrogen	All	NDPs: 0 Tests: 1		X			
Anions by Kone (w)	All	NDPs: 0 Tests: 1	X				
BOD True Total	All	NDPs: 0 Tests: 1	X				
COD Unfiltered	All	NDPs: 0 Tests: 1	X				
Conductivity (at 20 deg.C)	All	NDPs: 0 Tests: 1	X				
Cyanide Comp/Free/Total/Thiocyanate	All	NDPs: 0 Tests: 1			X		
Dissolved Metals by ICP-MS	All	NDPs: 0 Tests: 1	X				
Dissolved Organic/Inorganic Carbon	All	NDPs: 0 Tests: 1	X				
EPH (DRO) (C10-C40) Aqueous (W)	All	NDPs: 0 Tests: 1	X				
Ionic Balance	All	NDPs: 0 Tests: 1	X				
Metals by iCap-OES Dissolved (W)	All	NDPs: 0 Tests: 1	X				
Nitrite by Kone (w)	All	NDPs: 0 Tests: 1			X		
pH Value	All	NDPs: 0 Tests: 1	X				
Phosphate by Kone (w)	All	NDPs: 0 Tests: 1	X				



# CERTIFICATE OF ANALYSIS

Validated

<b>SDG:</b>	171220-4	<b>Client Reference:</b>	700111791	<b>Report Number:</b>	439315
<b>Location:</b>	Docksway Landfill Site	<b>Order Number:</b>	700111791	<b>Superseded Report:</b>	

Results Legend	Lab Sample No(s)						
	<div style="display: flex; flex-direction: column; gap: 5px;"> <div style="display: flex; align-items: center;"> <div style="width: 15px; height: 15px; background-color: yellow; border: 1px solid black; margin-right: 5px;"></div> <span>Test</span> </div> <div style="display: flex; align-items: center;"> <div style="width: 15px; height: 15px; background-color: red; color: white; border: 1px solid black; margin-right: 5px; display: flex; align-items: center; justify-content: center;">N</div> <span>No Determination Possible</span> </div> </div> <p>Sample Types -</p> <ul style="list-style-type: none"> <li>S - Soil/Solid</li> <li>UNS - Unspecified Solid</li> <li>GW - Ground Water</li> <li>SW - Surface Water</li> <li>LE - Land Leachate</li> <li>PL - Prepared Leachate</li> <li>PR - Process Water</li> <li>SA - Saline Water</li> <li>TE - Trade Effluent</li> <li>TS - Treated Sewage</li> <li>US - Untreated Sewage</li> <li>RE - Recreational Water</li> <li>DW - Drinking Water Non-regulatory</li> <li>UNL - Unspecified Liquid</li> <li>SL - Sludge</li> <li>G - Gas</li> <li>OTH - Other</li> </ul>	16793158					
	Customer Sample Reference	C2B					
	AGS Reference						
	Depth (m)	0.00 - 0.00					
	Container	1000ml glass bottle (ALE220)	11plastic (ALE221)	H2SO4 (ALE244)	NaOH (ALE245)	Vial (ALE297)	ZnAc (ALE246)
	Sample Type	LE	LE	LE	LE	LE	LE
Sulphide	All	NDPs: 0 Tests: 1					X
VOC MS (W)	All	NDPs: 0 Tests: 1				X	



CERTIFICATE OF ANALYSIS

Validated

SDG: 171220-4 Client Reference: Report Number: 439315  
 Location: Docksway Landfill Site Order Number: 700111791 Superseded Report:

Results Legend		Customer Sample Ref.	C2B				
#	ISO17025 accredited.						
M	mCERTS accredited.						
aq	Aqueous / settled sample.						
diss.filt	Dissolved / filtered sample.						
tot.unfilt	Total / unfiltered sample.						
*	Subcontracted test.						
**	% recovery of the surrogate standard to check the efficiency of the method. The results of individual compounds within samples aren't corrected for the recovery						
(F)	Trigger breach confirmed						
1-5&*\$@	Sample deviation (see appendix)						
		Depth (m)	0.00 - 0.00				
		Sample Type	Land Leachate (LE)				
		Date Sampled	19/12/2017				
		Sampled Time	.				
		Date Received	20/12/2017				
		SDG Ref	171220-4				
		Lab Sample No.(s)	16793158				
		AGS Reference					
Component	LOD/Units	Method					
Ionic balance	% Diff	Calulation	5.16				
Alkalinity, Total as CaCO3	<2 mg/l	TM043	7160	#			
BOD, unfiltered	<1 mg/l	TM045	138	◆ #			
Carbon, Organic (diss.filt)	<3 mg/l	TM090	520	◆			
Ammoniacal Nitrogen as N	<0.2 mg/l	TM099	1370				
Sulphide	<0.01 mg/l	TM101	0.3				
COD, unfiltered	<7 mg/l	TM107	1690	#			
Conductivity @ 20 deg.C	<0.005 mS/cm	TM120	15.4	#			
Arsenic (diss.filt)	<0.5 µg/l	TM152	57.1				
Boron (diss.filt)	<5 µg/l	TM152	6250				
Cadmium (diss.filt)	<0.08 µg/l	TM152	<0.08				
Chromium (diss.filt)	<1 µg/l	TM152	124				
Copper (diss.filt)	<0.3 µg/l	TM152	7.98				
Lead (diss.filt)	<0.2 µg/l	TM152	0.9				
Manganese (diss.filt)	<1 µg/l	TM152	377				
Nickel (diss.filt)	<0.4 µg/l	TM152	137				
Selenium (diss.filt)	<0.5 µg/l	TM152	0.742				
Zinc (diss.filt)	<1 µg/l	TM152	1010				
EPH Range >C10 - C40 (aq)	<100 µg/l	TM172	2020				
Nitrite as NO2	<0.05 mg/l	TM184	<0.05				
Phosphate (Ortho as PO4)	<0.05 mg/l	TM184	21.4				
Sulphate	<2 mg/l	TM184	171				
Chloride	<2 mg/l	TM184	1850				
Nitrate as NO3	<0.3 mg/l	TM184	<3				
Total Oxidised Nitrogen as N	<0.1 mg/l	TM184	<1				
Cyanide, Total	<0.05 mg/l	TM227	0.053	#			
Potassium (diss.filt)	<1 mg/l	TM228	682				
Iron (diss.filt)	<0.019 mg/l	TM228	6.46				
Hardness, Total as CaCO3	<1 mg/l	TM228	1140				
pH	<1 pH Units	TM256	8.11	#			



# CERTIFICATE OF ANALYSIS

Validated

SDG: 171220-4  
Location: Docksway Landfill Site

Client Reference:  
Order Number: 700111791

Report Number: 439315  
Superseded Report:

## VOC MS (W)

Results Legend		Customer Sample Ref.	C2B				
#	ISO17025 accredited.						
M	mCERTS accredited.						
aq	Aqueous / settled sample.						
diss.filt	Dissolved / filtered sample.	Depth (m)	0.00 - 0.00				
tot.unfilt	Total / unfiltered sample.	Sample Type	Land Leachate (LE)				
*	Subcontracted test.	Date Sampled	19/12/2017				
**	% recovery of the surrogate standard to check the efficiency of the method. The results of individual compounds within samples aren't corrected for the recovery	Sampled Time	.				
(F)	Trigger breach confirmed	Date Received	20/12/2017				
1-5&*\$@	Sample deviation (see appendix)	SDG Ref	171220-4				
		Lab Sample No.(s)	16793158				
		AGS Reference					
Component	LOD/Units	Method					
Benzene	<1 µg/l	TM208	2.81				
				#			
m,p-Xylene	<1 µg/l	TM208	2.59				
				#			
o-Xylene	<1 µg/l	TM208	2.55				
				#			
Naphthalene	<1 µg/l	TM208	<1				
				#			



# CERTIFICATE OF ANALYSIS

Validated

<b>SDG:</b>	171220-4	<b>Client Reference:</b>	Report Number:	439315
<b>Location:</b>	Docksway Landfill Site	<b>Order Number:</b>	Superseded Report:	

## Table of Results - Appendix

Method No	Reference	Description
Calculation		
TM043	Method 2320B, AWWA/APHA, 20th Ed., 1999 / BS 2690: Part109 1984	Determination of alkalinity in aqueous samples
TM045	MEWAM BOD5 2nd Ed.HMSO 1988 / Method 5210B, AWWA/APHA, 20th Ed., 1999; SCA Blue Book 130	Determination of BOD5 (ATU) Filtered by Oxygen Meter on liquids
TM061	Method for the Determination of EPH,Massachusetts Dept.of EP, 1998	Determination of Extractable Petroleum Hydrocarbons by GC-FID (C10-C40)
TM090	Method 5310, AWWA/APHA, 20th Ed., 1999 / Modified: US EPA Method 415.1 & 9060	Determination of Total Organic Carbon/Total Inorganic Carbon in Water and Waste Water
TM099	BS 2690: Part 7:1968 / BS 6068: Part2.11:1984	Determination of Ammonium in Water Samples using the Kone Analyser
TM101	Method 4500B & C, AWWA/APHA, 20th Ed., 1999	Determination of Sulphide in soil and water samples using the Kone Analyser
TM107	ISO 6060-1989	Determination of Chemical Oxygen Demand using COD Dr Lange Kit
TM120	Method 2510B, AWWA/APHA, 20th Ed., 1999 / BS 2690: Part 9:1970	Determination of Electrical Conductivity using a Conductivity Meter
TM152	Method 3125B, AWWA/APHA, 20th Ed., 1999	Analysis of Aqueous Samples by ICP-MS
TM172	Analysis of Petroleum Hydrocarbons in Environmental Media – Total Petroleum Hydrocarbon Criteria	EPH in Waters
TM184	EPA Methods 325.1 & 325.2,	The Determination of Anions in Aqueous Matrices using the Kone Spectrophotometric Analysers
TM208	Modified: US EPA Method 8260b & 624	Determination of Volatile Organic Compounds by Headspace / GC-MS in Waters
TM227	Standard methods for the examination of waters and wastewaters 20th Edition, AWWA/APHA Method 4500.	Determination of Total Cyanide, Free (Easily Liberatable) Cyanide and Thiocyanate
TM228	US EPA Method 6010B	Determination of Major Cations in Water by iCap 6500 Duo ICP-OES
TM256	The measurement of Electrical Conductivity and the Laboratory determination of pH Value of Natural, Treated and Wastewaters. HMSO, 1978. ISBN 011 751428 4.	Determination of pH in Water and Leachate using the GLpH pH Meter

NA = not applicable.

Chemical testing (unless subcontracted) performed at ALS Environmental Hawarden (Method codes TM) or ALS Environmental Aberdeen (Method codes S).



# CERTIFICATE OF ANALYSIS

Validated

SDG: 171220-4  
Location: Docksway Landfill Site

Client Reference:  
Order Number: 700111791

Report Number: 439315  
Superseded Report:

## Test Completion Dates

<b>Lab Sample No(s)</b>	16793158
<b>Customer Sample Ref.</b>	C2B
<b>AGS Ref.</b>	
<b>Depth</b>	0.00 - 0.00
<b>Type</b>	Land Leachate

Alkalinity as CaCO3	28-Dec-2017
Alkalinity Filtered as CaCO3	29-Dec-2017
Ammoniacal Nitrogen	03-Jan-2018
Anions by Kone (w)	03-Jan-2018
BOD True Total	27-Dec-2017
COD Unfiltered	29-Dec-2017
Conductivity (at 20 deg.C)	27-Dec-2017
Cyanide Comp/Free/Total/Thiocyanate	28-Dec-2017
Dissolved Metals by ICP-MS	05-Jan-2018
Dissolved Organic/Inorganic Carbon	28-Dec-2017
EPH (DRO) (C10-C40) Aqueous (W)	02-Jan-2018
Ionic Balance	08-Jan-2018
Metals by iCap-OES Dissolved (W)	04-Jan-2018
Nitrite by Kone (w)	30-Dec-2017
pH Value	29-Dec-2017
Phosphate by Kone (w)	30-Dec-2017
Sulphide	03-Jan-2018
VOC MS (W)	28-Dec-2017



# CERTIFICATE OF ANALYSIS

Validated

SDG: 171220-4  
Location: Docksway Landfill Site

Client Reference:  
Order Number: 700111791

Report Number: 439315  
Superseded Report:

## Chromatogram


Analysis: EPH (DRO) (C10-C40) Aqueous (W)

Sample No : 16799052  
Sample ID : C2B

Depth : 0.00 - 0.00

EPH Range Organics ( C10 - C40 )

Sample Identity: 15750114-  
Date Acquired : 29/12/2017 14:10:45 PM  
Units : ppb

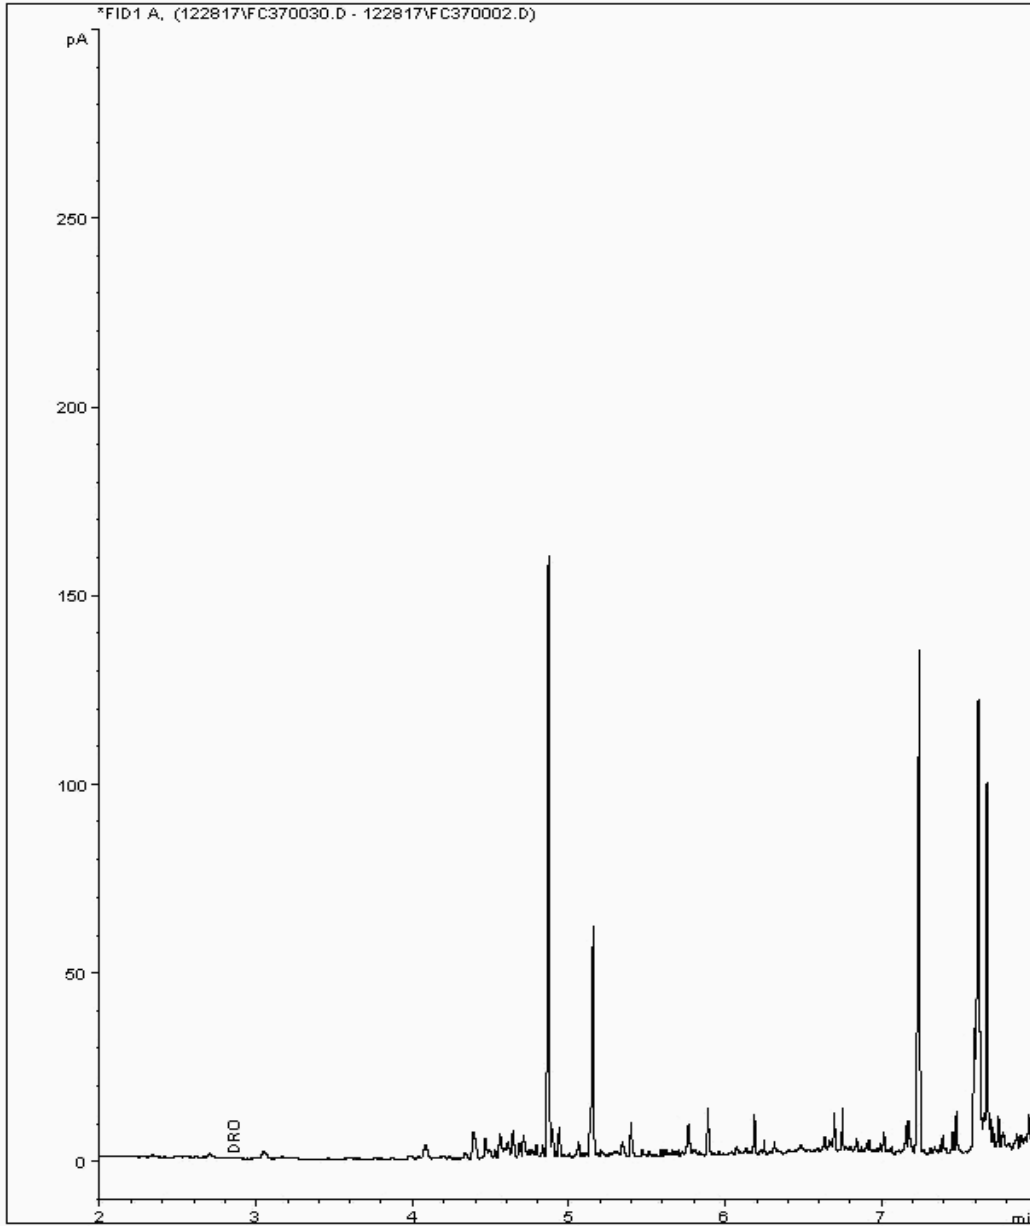



# CERTIFICATE OF ANALYSIS

<b>SDG:</b> 171220-4	<b>Client Reference:</b>	<b>Report Number:</b> 439315
<b>Location:</b> Docksway Landfill Site	<b>Order Number:</b> 700111791	<b>Superseded Report:</b>

## Appendix

## General

1. Results are expressed on a dry weight basis (dried at 35°C) for all soil analyses except for the following: NRA and CEN Leach tests, flash point LOI, pH, ammonium as NH4 by the BRE method, VOC TICs and SVOC TICs.

2. Samples will be run in duplicate upon request, but an additional charge may be incurred.

3. If sufficient sample is received a sub sample will be retained free of charge for 30 days after analysis is completed (e-mailed) for all sample types unless the sample is destroyed on testing. The prepared soil sub sample that is analysed for asbestos will be retained for a period of 6 months after the analysis date. All bulk samples will be retained for a period of 6 months after the analysis date. All samples received and not scheduled will be disposed of one month after the date of receipt unless we are instructed to the contrary. Once the initial period has expired, a storage charge will be applied for each month or part thereof until the client cancels the request for sample storage. ALS reserve the right to charge for samples received and stored but not analysed.

4. With respect to turnaround, we will always endeavour to meet client requirements wherever possible, but turnaround times cannot be absolutely guaranteed due to so many variables beyond our control.

5. We take responsibility for any test performed by sub-contractors (marked with an asterisk). We endeavour to use UKAS/MCERTS Accredited Laboratories, who either complete a quality questionnaire or are audited by ourselves. For some determinands there are no UKAS/MCERTS Accredited Laboratories, in this instance a laboratory with a known track record will be utilised.

6. When requested, the individual sub sample scheduled will be analysed in house for the presence of asbestos fibres and asbestos containing material by our documented in house method TM048 based on HSG 248 (2005), which is accredited to ISO17025. If a specific asbestos fibre type is not found this will be reported as "Not detected". If no asbestos fibre types are found all will be reported as "Not detected" and the sub sample analysed deemed to be clear of asbestos. If an asbestos fibre type is found it will be reported as detected (for each fibre type found). Testing can be carried out on asbestos positive samples, but, due to Health and Safety considerations, may be replaced by alternative tests or reported as No Determination Possible (NDP). The quantity of asbestos present is not determined unless specifically requested.

7. If no separate volatile sample is supplied by the client, or if a headspace or sediment is present in the volatile sample, the integrity of the data may be compromised. This will be flagged up as an invalid VOC on the test schedule and the result marked as deviating on the test certificate.

8. If appropriate preserved bottles are not received preservation will take place on receipt. However, the integrity of the data may be compromised.

9. NDP - No determination possible due to insufficient/unsuitable sample.

10. Metals in water are performed on a filtered sample, and therefore represent dissolved metals - total metals must be requested separately.

11. Results relate only to the items tested.

12. LoDs (Limit of Detection) for wet tests reported on a dry weight basis are not corrected for moisture content.

13. **Surrogate recoveries** - Surrogates are added to your sample to monitor recovery of the test requested. A % recovery is reported, results are not corrected for the recovery measured. Typical recoveries for organics tests are 70-130%, they are generally wider for volatiles analysis, 50-150%. Recoveries in soils are affected by organic rich or clay rich matrices. Waters can be affected by remediation fluids or high amounts of sediment. Test results are only ever reported if all of the associated quality checks pass; it is assumed that all recoveries outside of the values above are due to matrix affect.

14. **Product analyses** - Organic analyses on products can only be semi-quantitative due to the matrix effects and high dilution factors employed.

15. Phenols monohydric by HPLC include phenol, cresols (2-Methylphenol, 3-Methylphenol and 4-Methylphenol) and Xylenols (2,3 Dimethylphenol, 2,4 Dimethylphenol, 2,5 Dimethylphenol, 2,6 Dimethylphenol, 3,4 Dimethylphenol, 3,5 Dimethylphenol).

16. Total of 5 speciated phenols by HPLC includes Phenol, 2,3,5-Trimethyl Phenol, 2-Isopropylphenol, Cresols and Xylenols (as detailed in 15).

17. Stones/debris are not routinely removed. We always endeavour to take a representative sub sample from the received sample.

18. In certain circumstances the method detection limit may be elevated due to the sample being outside the calibration range. Other factors that may contribute to this include possible interferences. In both cases the sample would be diluted which would cause the method detection limit to be raised.

19. Mercury results quoted on soils will not include volatile mercury as the analysis is performed on a dried and crushed sample.

20. For leachate preparations other than Zero Headspace Extraction (ZHE) volatile loss may occur.

21. For the BSEN 12457-3 two batch process to allow the cumulative release to be calculated, the volume of the leachate produced is measured and filtered for all tests. We therefore cannot carry out any unfiltered analysis. The tests affected include volatiles GCFID/GCMS and all subcontracted analysis.

22. We are accredited to MCERTS for sand, clay and loam/topsoil, or any of these materials - whether these are derived from naturally occurring soil profiles, or from fill/made ground, as long as these materials constitute the major part of the sample. Other coarse granular material such as concrete, gravel and brick are not accredited if they comprise the major part of the sample.

23. Analysis and identification of specific compounds using GCFID is by retention time only, and we routinely calibrate and quantify for benzene, toluene, ethylbenzenes and xylenes (BTEX). For total volatiles in the C5-C12 range, the total area of the chromatogram is integrated and expressed as ug/kg or ug/l. Although this analysis is commonly used for the quantification of gasoline range organics (GRO), the system will also detect other compounds such as chlorinated solvents, and this may lead to a falsely high result with respect to hydrocarbons only. It is not possible to specifically identify these non-hydrocarbons, as standards are not routinely run for any other compounds, and for more definitive identification, volatiles by GCMS should be utilised.

24. **Tentatively Identified Compounds (TICs)** are non-target peaks in VOC and SVOC analysis. All non-target peaks detected with a concentration above the LoD are subjected to a mass spectral library search. Non-target peaks with a library search confidence of >75% are reported based on the best mass spectral library match. When a non-target peak with a library search confidence of <75% is detected it is reported as "mixed hydrocarbons". Non-target compounds identified from the scan data are semi-quantified relative to one of the deuterated internal standards, under the same chromatographic conditions as the target compounds. This result is reported as a semi-quantitative value and reported as Tentatively Identified Compounds (TICs). TICs are outside the scope of UKAS accreditation and are not moisture corrected.

## Sample Deviations

If a sample is classed as deviated then the associated results may be compromised.

1	Container with Headspace provided for volatiles analysis
2	Incorrect container received
3	Deviation from method
4	Holding time exceeded before sample received
5	Samples exceeded holding time before preservation was performed
§	Sampled on date not provided
◆	Sample holding time exceeded in laboratory
@	Sample holding time exceeded due to sampled on date
&	Sample Holding Time exceeded - Late arrival of instructions.

## Asbestos

### Identification of Asbestos in Bulk Materials & Soils

The results for identification of asbestos in bulk materials are obtained from supplied bulk materials which have been examined to determine the presence of asbestos fibres using ALS (Hawarden) in-house method of transmitted/polarised light microscopy and central stop dispersion staining, based on HSG 248 (2005).

The results for identification of asbestos in soils are obtained from a homogenised sub sample which has been examined to determine the presence of asbestos fibres using ALS (Hawarden) in-house method of transmitted/polarised light microscopy and central stop dispersion staining, based on HSG 248 (2005).

Astestost Type	Common Name
Chrysotile	White Asbestos
Amosite	Brown Asbestos
Coöiolite	Blue Asbestos
Fibrous Actinolite	-
Fibrous Anthophyllite	-
Fibrous Tremolite	-

### Visual Estimation Of Fibre Content

Estimation of fibre content is not permitted as part of our UKAS accredited test other than: - Trace - Where only one or two asbestos fibres were identified.

**Further guidance on typical asbestos fibre content of manufactured products can be found in HSG 264.**

**The identification of asbestos containing materials and soils falls within our schedule of tests for which we hold UKAS accreditation, however opinions, interpretations and all other information contained in the report are outside the scope of UKAS accreditation.**