

Information on this drawing may only be used for the purpose for which it is supplied by the company.
This drawing and all copies must be returned on demand.

Do not scale.

NOTES:

1. ALL DIMENSIONS ARE mm UNLESS STATED OTHERWISE.
2. TEMPORARY WORKS DESIGNER TO BE CONTACTED PRIOR TO ANY CHANGES TO THE DESIGN.
3. TO BE READ IN CONJUNCTION WITH DRGS: JSN-0464-SKE-001 TO 002

PRELIMINARY

A	17/05/2021	PRELIMINARY ISSUE	SWL	JCR
Rev	Date	Description	CAD	Eng

Span

Innovative access solutions

Span Access Solutions Ltd
Clashburn Close
Kinross Business Park
Kinross
KY13 8GF

T: 0845 474 5562
F: 01234 5678 910
E: info@spanaccess.co.uk
www.spanaccess.co.uk

Project

NEWPORT TRANSPORTER BRIDGE
SUSPENDED ACCESS GANTRY

Client





Title

PLATFORM 1 & 2 - MAIN BOOM
PRELIMINARY GENERAL ARRANGEMENT

Scale	CAD	SWL	Date
AS SHOWN	Engineer	JCR	MAY '21
	Checked		

Sage	Drawing Number	Rev.
-	JSN-0464-SKE-007	A

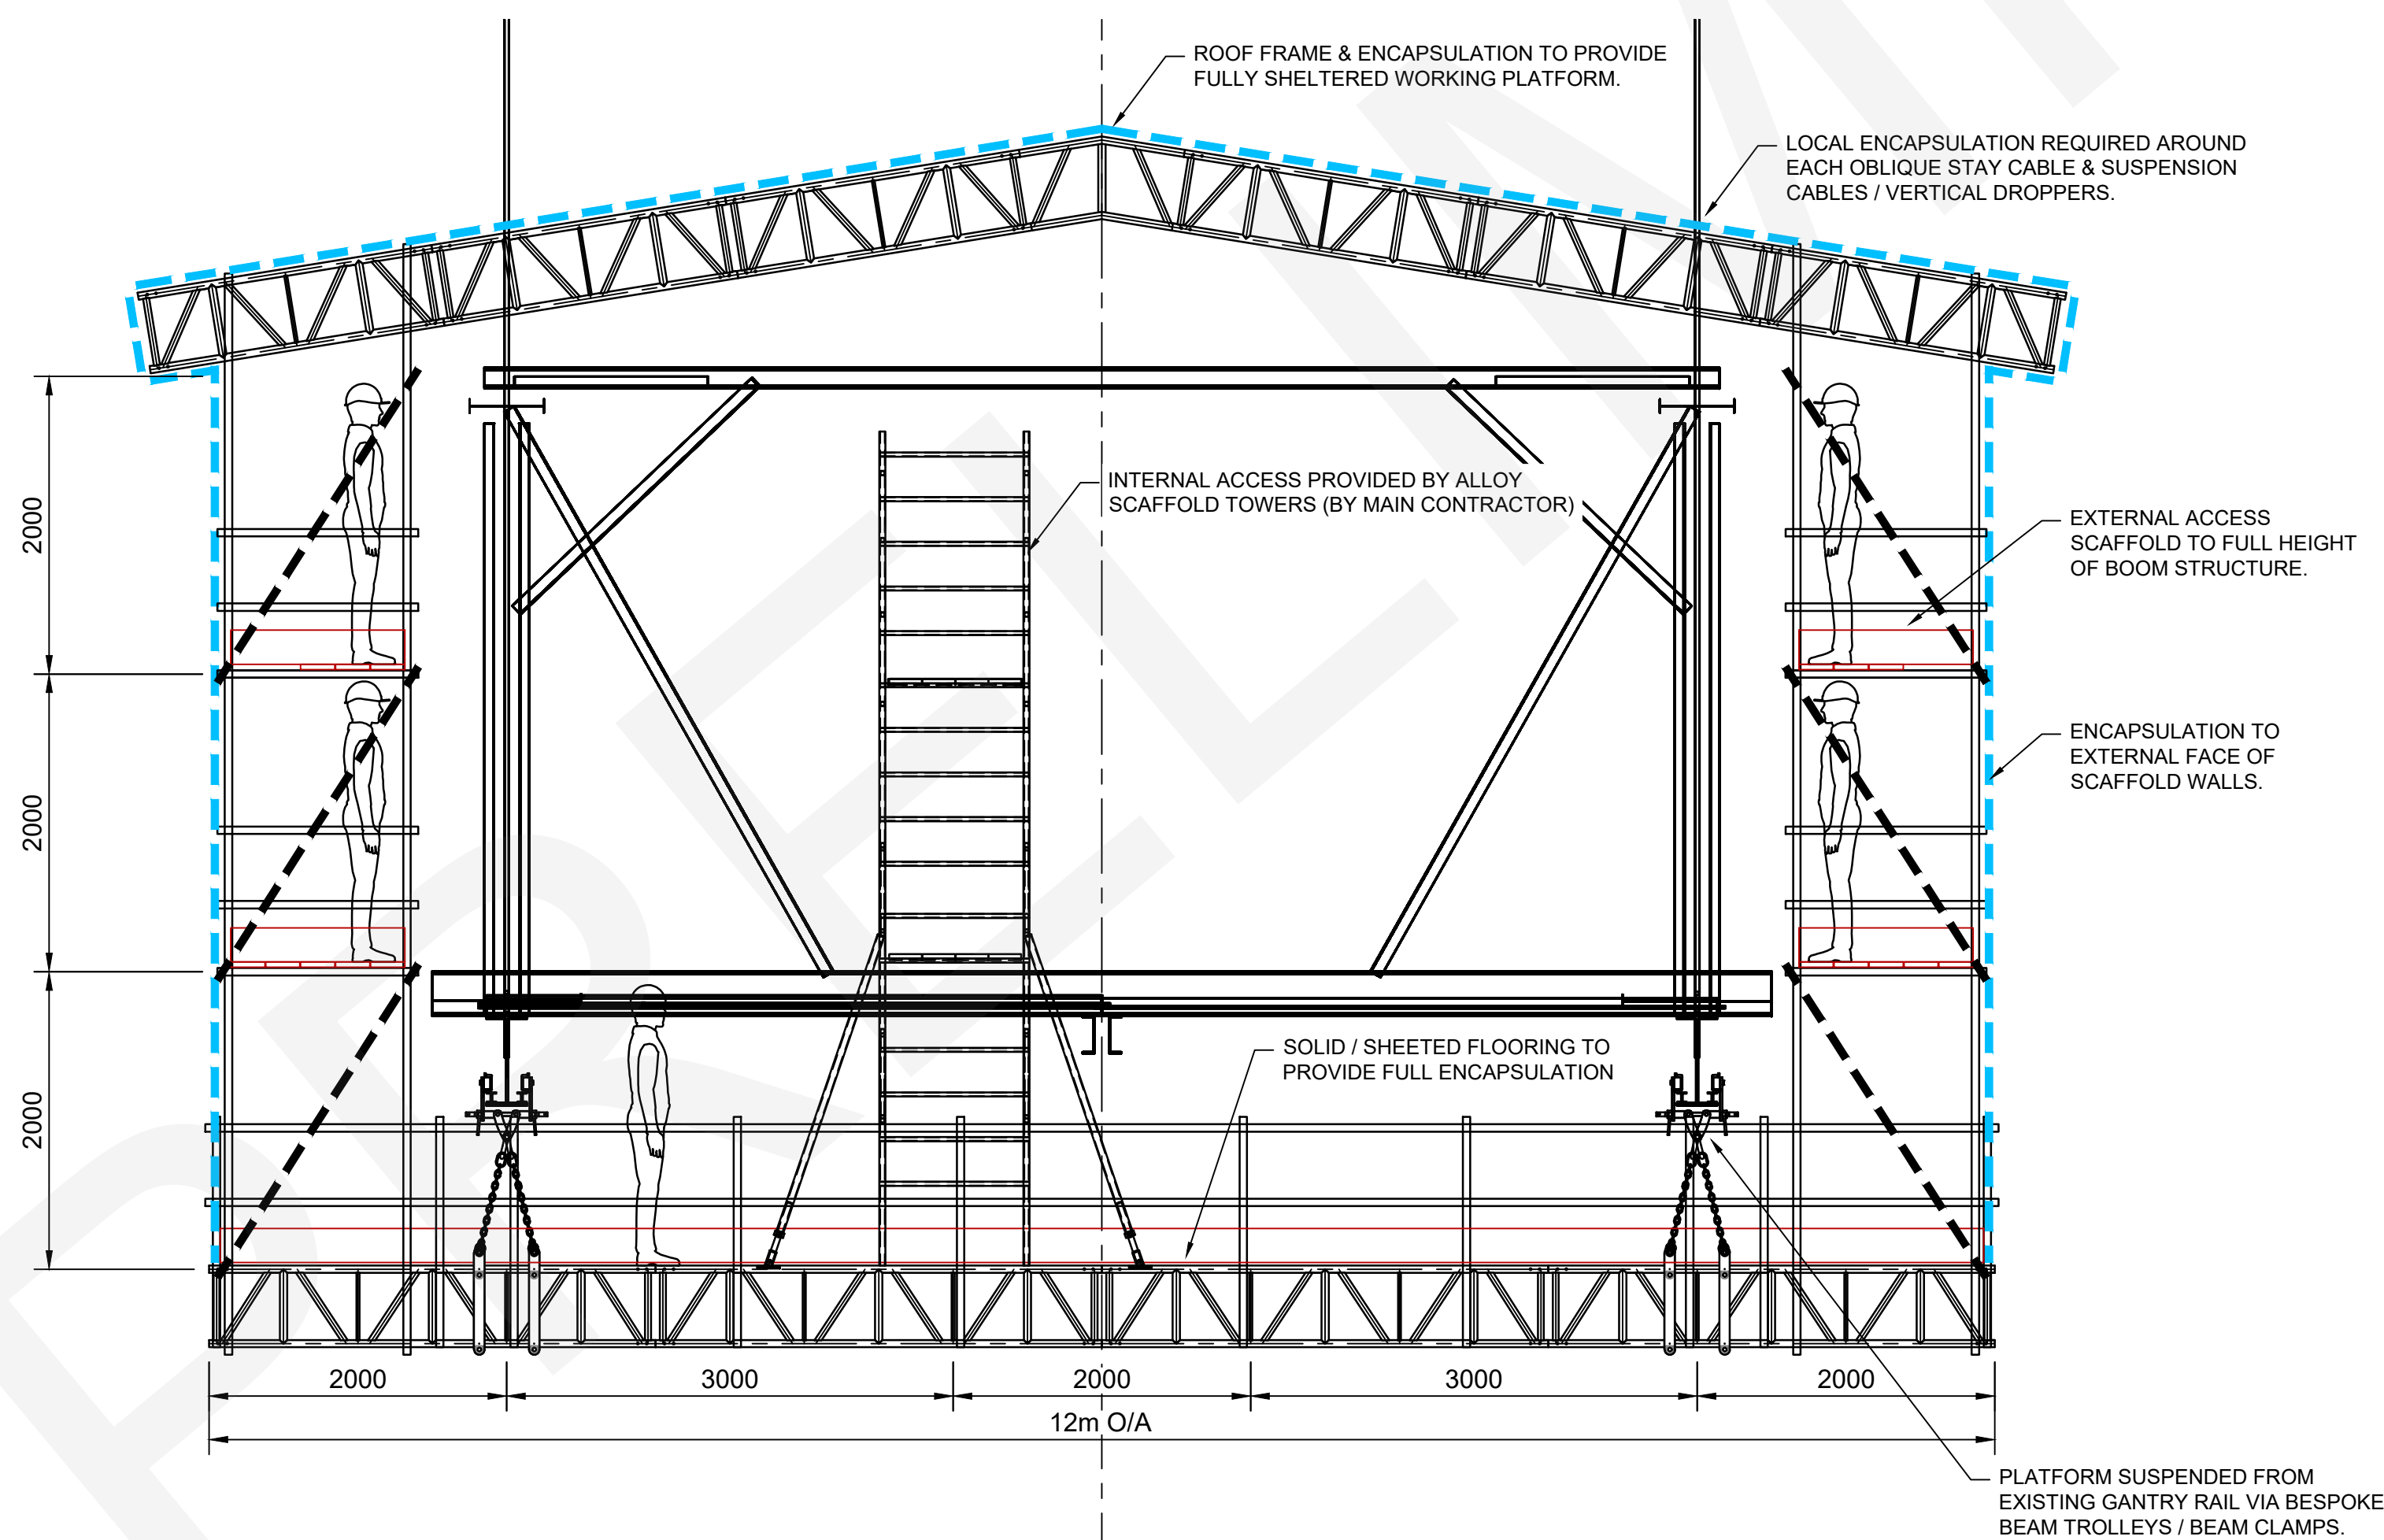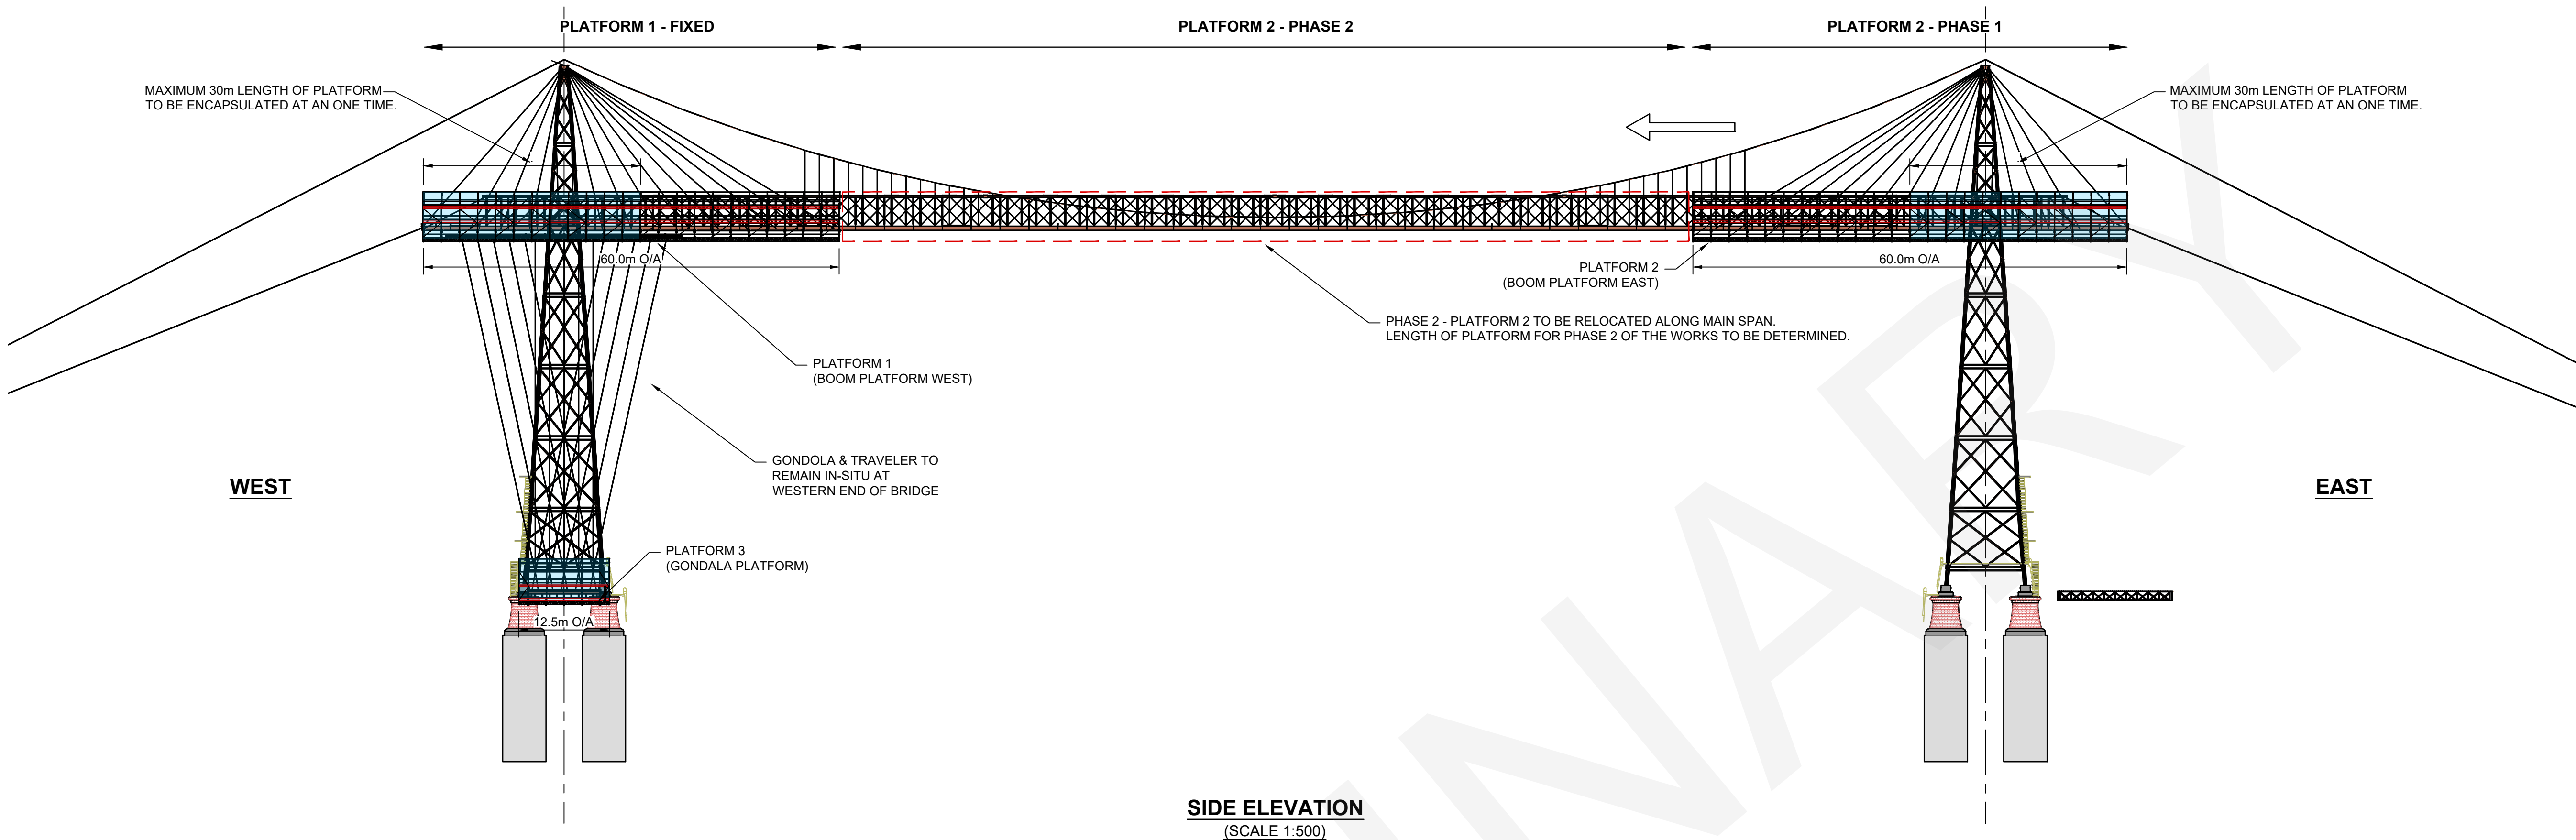

ALL BLASTING AND PAINTING OF WORKS TO TAKE PLACE WITHIN A FULLY ENCAPSULATED PLATFORM AREA. INCLUDING SOLID / SHEETED FLOORING. TO PREVENT ANY DELETERIOUS MATERIAL FROM ENTERING THE WATERCOURSE OR SURROUNDING ENVIRONMENT.

ENCAPSULATION NOTE:

1. PLATFORM 1 & 2 (PHASE 1) ENCAPSULATION TO BE INSTALLED ON MAXIMUM, 30m LENGTH OF PLATFORM AT ANY ONE TIME. ENCAPSULATION TO BE STRIPPED AND REINSTALLED AS NECESSARY TO SUIT THE WORKS.
2. PLATFORM 2 (PHASE 2) MAXIMUM LENGTH OF PLATFORM TO BE ENCAPSULATED AT ANY ONE TIME TBA.
3. PLATFORM ROOF STRUCTURE AND ENCAPSULATION TO BE STRIPPED PRIOR TO ANY PLATFORM RELOCATION. ENCAPSULATION TO BE REINSTALLED AS NECESSARY TO SUIT THE WORKS.
4. ADDITIONAL LOCAL INTERNAL ENCAPSULATION TO BE INSTALLED AS REQUIRED TO SUIT THE WORKS.