

**EAST WASTE
MANAGEMENT SITE,
LLANWERN STEELWORKS**

PERMIT EAWML/30003

**2018 Annual Review of
Environmental
Monitoring**

Report Number 1785r1v1d0219

Commissioned by
Tata Steel UK Limited
Port Talbot Works
Margam
Port Talbot
SA13 2NG

Prepared by
Geotechnology Ltd
Ty Coed
Cefn-yr-Allt
Aberdulais
SA10 8HE



February 2019

Table of Contents

1 INTRODUCTION	1
2 SITE SETTING AND ACTIVITY	2
2.1 Location and Description of the Site	2
2.2 Historical Landfilling	2
2.3 Ongoing Capping and Restoration	2
2.3.1 Scheme Design	2
3 ENVIRONMENTAL SETTING	4
3.1 Surrounding Areas	4
3.2 Geology	4
3.3 Hydrogeology	5
3.4 Groundwater Flow	6
3.4.1 Shallow Groundwater	6
3.4.2 Deeper Groundwater	7
3.5 Groundwater Quality	7
3.6 Leachate	7
3.7 Surface Water	7
3.8 Landfill Gas	8
4 REGULATORY FRAMEWORK	9
4.1 Aftercare Monitoring Plan	9
4.2 Control and Trigger Levels	11
5 MONITORING PROGRAMME	12
5.1 Integrity of Monitoring Infrastructure	12
5.1.1 Leachate Monitoring	12
5.1.2 Groundwater Monitoring Infrastructure	13
5.1.3 Surface Water Monitoring Infrastructure	13
5.1.4 Internal Gas Monitoring Infrastructure	13
5.1.5 External Gas Monitoring Infrastructure	13
5.2 Analytical Testwork	13
5.3 Actions required	13
6 TOPOGRAPHIC SURVEY AND SETTLEMENT MONITORING PROGRAMME	14
7 LEACHATE LEVEL AND QUALITY	15
7.1 Level 15	
7.2 Leachate Collection Ditches	15
8 GROUNDWATER LEVEL AND QUALITY	16
8.1 Groundwater Flow	16
8.2 Shallow Groundwater	16
8.3 Deep Groundwater	16
9 SURFACE WATER	18
9.1 Reen Hydrochemistry	18
9.2 Contingency Actions Taken	19

10 LANDFILL GAS	20
11 AMENITY ISSUES	21
12 SUMMARY AND RECOMMENDATIONS	22
12.1 Evaluation and Summary	22
12.2 Actions Required	22

List of Tables

Table 2-1 Waste Breakdown	2
Table 3-1 Lithological sequence beneath landfill	5
Table 4-1 Proposed Monitoring Schedule	9
Table 4-2 Analytical Programme	10
Table 5-1 Monitoring Point Locations	12

List of Figures

1. Site Location Plan
2. Environmental Setting
3. Hydrology
4. Site Investigation Locations
5. Geological Cross Sections
6. Available Monitoring Network
7. Hydrogeological Conceptual Site Model
8. Historical Groundwater Levels
9. Groundwater Levels September 2017

List of Appendices

1. Groundwater levels and chemistry
2. Surface water chemistry

Executive Summary

Monitoring of groundwater and surface water around the landfill has revealed that shallow groundwater continues to be impacted by seepage from the unlined waste mass at Llanwern East Waste Management Site. Drainage ditches around much of the perimeter of the site control shallow groundwater levels, intercept leachate and direct it to the works treatment facility. Along the eastern flank, potential leachate breakout has been observed and as this poses a direct risk to surface water quality, Tata has informed NRW and is continuing to manage mitigation measures. The available data suggests that these measures are effective at protecting the reens.

Restoration capping works are currently on stop as soils imported to the site have been found to contain knotweed. Tata is evaluating options and until a decision has been made, the site is not accessible. This means that gas monitoring points, one ground water well (BH3) and one leachate sample point (EL1) have not been accessed since 2017.

1 INTRODUCTION

Llanwern East Waste Management Site (LEWMS) is a land raise occupying an area of some 200,000m² at the eastern end of the Tata Steel (UK) Ltd, Llanwern Steelworks. The site is maintained and operated by Tata Steel (UK) Ltd (Tata). The landfill has accepted approximately 2.5 million tonnes of non-hazardous industrial and commercial wastes from the steel plant since its inception in 1978 until 2008 under a Waste Management Licence (Licence numbers 007/77 (EAWML/30003)).

In 2003, Tata (then Corus (UK) Ltd) applied to the Environment Agency (now Natural Resources Wales or NRW) for a Pollution Prevention and Control (PPC) Permit for the landfill as it still had a significant void space available within its planning consent. However, the permit application was refused. As the Permit was refused, NRW served a Closure Notice on 14 November 2006 requiring a series of risk assessments to be undertaken to inform the closure process. At the time, Corus expressed a desire to continue waste acceptance for a limited period of 12 months to allow the landfill landform to be completed and the site restored (see Geotechnology report 525.1/0/0207). As the Application was refused and the time for additional waste deposition lapsed, NRW issued a second Closure Notice (No. GR/EM4/01) on 25 February 2008. The Closure Notice specified that the landfill must cease accepting waste for disposal at landfill as of 31 March 2008 and that the landfill must be maintained, monitored and controlled as required by the conditions of the authorisation numbered 007/77.

A Closure Report was submitted to NRW in April 2008 (Geotechnology Report Reference 663.1/1/0408) which detailed the restoration plan proposed for the landfill. The Plan included a sequence of work including the installation of gas wells, geomembranes and soils to fully restore the surface of the landfill. The restoration scheme included full management of any evolved landfill gas, collection and treatment of surface waters and the vegetation of the placed restoration soils. This capping and restoration scheme is currently ongoing and due to be completed by 2018. To date, approximately one third of the site has been covered with a combination of geomembranes and capping soils.

This annual report brings together all of the environmental monitoring data gathered to date since issue of the 2008 Closure Report, which included an Aftercare Monitoring Plan (AMP).

2 SITE SETTING AND ACTIVITY

2.1 Location and Description of the Site

Llanwern Eastern Waste Management Site is located at Ordnance Survey Grid Reference No. ST 397 864, as shown on Figures 1 and 2. The site lies at the eastern edge of the Tata Llanwern Steelworks and has accepted steelmaking and general wastes from the Llanwern site for four decades. The waste management site is a land raise, with wastes being deposited initially into very shallow excavations (circa 1 metre) onto natural ground. Disposal has developed a raised landform that now reaches 15m above Ordnance Datum (AOD), or some 10m above surrounding ground level.

The site occupies an area of 197,835m² (19.78 Ha) and is fully occupied by deposited wastes. The landform of the site comprises a steep sided plateau, with only 1m of relief across the top of the land raise. LEWMS measures approximately 830m long by 300m wide with the long axis oriented north to south. In the northern half of the site, the boundary tapers to a point whilst the southern half of the site boundary is a uniform rectangle measuring 300m wide by 400m long.

2.2 Historical Landfilling

An examination of past disposal records shows that only a very small proportion of the waste stream is biodegradable. The remainder of the wastes comprise steel making wastes and demolition rubble. A breakdown of the most recent wastes to have been landfilled is provided in Table 2-1.

Table 2-1 Waste Breakdown

Biodegradable	-	Canteen Waste	0.18%
	-	Office Waste/General Rubbish	15.58%
	-	Horticultural Waste	0.14%
	-	Timber	0.45%
Non-Biodegradable	-	Steel (BOS) Slag	32.4%
Inert Cover			12.7%
Dusts			1.71%
Demolition Rubble			18.82%
Other Non-degradable Wastes			18.02%

The existing waste mass has been placed by mixing all waste streams. This gives a diffuse distribution of biodegradable wastes intermixed with very high permeability steelmaking wastes (principally slag based).

2.3 Ongoing Capping and Restoration

2.3.1 Scheme Design

The restoration of LEWMS comprises the construction of a cap. Due to the size of the landfill cap area, the restoration will be completed on a piecemeal basis. This is likely to comprise three annual phases of capping work. All works are currently on hold pending an investigation of soil quality.

The capping work will involve the removal of all existing vegetation; the placement of a regulating layer; placement of gas vents and gas collection geomembrane; placement of a

1mm HDPE geomembrane; placement of infiltration water collection geomembrane and pipe work and finally the restoration soils.

The initial works will involve the clearance of vegetation on the existing waste surfaces. This vegetation is generally scrub and is therefore amenable for shredding and re-use as compost for mixing with the restoration soils. Once vegetation clearance is completed the over-steep slopes will be re-graded to an angle of 1 in 3.5 (v/h) generally and 1 in 3 adjacent to the road. The flat plateau will also require some earthworks re-grading in order to encourage more rapid surface water run-off as currently it is too flat.

Once the slopes have been re-graded and rolled, the regulating layer will be placed, or re-dressed where suitable material already exists. The regulating layer will comprise sub-dredgings on the plateau cap and more granular slag dust on the flanks.

Once the final landform is completed, a passive gas extraction system will be installed on the cap which will comprise a gas geocomposite membrane with shallow piped aggregate trenches. The landfill gas collected from the piped system will be passively vented and monitored. The vents will be located on the crest of the slopes and at the high elevation points on the cap.

If monitoring was to reveal the presence of viable quantities of gas, the vents could be adapted to actively collect the gas and take it to a central location for flaring. Gas volumes were shown to be marginal in the original Closure Plan and as the landfill has not been capped for a further 7 years since, it is likely that insufficient volumes exist for successful flaring. However, this can only be ascertained once the cap and vents are fully in place.

The completion of the gas collection system described will allow the main capping membrane to be placed on top. This will comprise 1mm double rough sided and smooth HDPE. The former will be used on the slopes for enhanced frictional capabilities and the latter on the cap.

The capping membrane will be sealed onto the gas vents to ensure complete gas encapsulation. The surface water collection geomembrane will lie directly on the capping membrane and together with the underlying gas geomembrane will function as a protective layer to it.

A geomembrane will collect infiltrated water once the restoration soils are in place in order to prevent saturation and instability and will feed into a series of shallow piped ditches placed around the perimeter of the landfill. These ditches or trenches will collect surface water running overland on top of the restored soil surface.

The placement of the restoration soils will be closely followed by a program of vegetation placement via a combination of hydro-seeding and application of the compost generated by the original vegetation clearance.

3 ENVIRONMENTAL SETTING

Key features and receptors are identified on Figure 2.

3.1 Surrounding Areas

To the east, the landform slopes gently down to the steelworks boundary at Hundred Perches Reen, a slow flowing man-made ditch draining the surrounding levels. Mature vegetation has established itself along the eastern batter of the landfill, forming a tree and vegetation screen to the land raise. The western and southern boundaries of the site are steep waste slopes which drop from the waste plateau to site roads within the steel plant. These boundaries have leachate collection ditches running along 50% of their length, set between the toe of the waste slope and the site roads. Surface water flows within the open collection ditches are directed into Drain 10 of the works effluent treatment system, as shown in Figure 3.

The northeastern boundary of the site is marked by a shunting spur to the works railway system. Between the toe of the waste slope and the railway, a ditch has been excavated to collect leachate moving through the slag starter layer beneath the waste. Leachate from this ditch is piped into Drain 9 of the works effluent treatment system.

With the exception of the eastern batter, each of the existing slopes comprise waste materials (principally steel slag) with a thin, impersistent covering of site won dredgings from the water courses around the plant. Vegetation is locally established on these flanks, comprising mainly invasive species such as Buddleia and Thistle.

The land surrounding LEWMS is flat lying and forms part of the Gwent levels. This is an area of reclaimed coastal marshland that extends through several counties surrounding the Severn Estuary. The site is 3.5km from the current estuary boundary which is due to extensive land drainage and sea flood defences maintenance since Roman times. Land use comprises low grade arable and grazing land in a system of fields separated by drainage ditches or reens. The reens form an inter-bedded network of drainage ditches with levels controlled by a series of sluices at the sea defence to the south of the site. Surface water discharges at low tide and at periods of high water the sluices are closed to prevent seawater incursion into the reen system. The nominal elevation of the ground surface surrounding the site is 5m AOD with a reen water level of 2.3m AOD.

The site lies in a remote area. There are five dwellings within 500m of the site, one warehouse and an industrial building (on the Llanwern site). Several public roads lie within 500m of the site as does the main South Wales to London railway line. All the land surrounding the perimeter of the eastern end of the Llanwern site is designated a SSSI, part of the Gwent levels SSSI.

3.2 Geology

Through a combination of desk study and site investigation the site has been found to be underlain by a very uniform sequence of marine (estuarine) clays, freshwater peat, gravels and Mercia Mudstone bedrock. Some of the investigation locations are indicated on Figure 4. Based on the observations made at these positions a series of interpretive geological cross sections are presented in Figure 5. In each of the boreholes and trial pits the sequence summarised in Table 3-1 was encountered.

Table 3-1 Lithological sequence beneath landfill

Lithology	Thickness / m
Made Ground (Fill)	1.90 - 4.50
Upper Clay	1.85 - 2.60
Peat	1.40 - 2.55
Lower Clay	1.35 - 3.50
Gravel	0.45 - 2.00
Bedrock	>10

With a ground surface elevation typically of 5 to 7m AOD, the upper clay lies just above Ordnance Datum (i.e. mean sea level). All other strata, including the peat horizon, lie below mean sea level.

The geological deposit - known as the Wentlooge Formation - that was formed beneath the Levels is a series of alternating layers or beds of mainly blue-green silt and brown-black peat that total 10-15 metres thick in most places. The deposit represents tidal mudflats and different types of tidal-freshwater marsh. Locally, the beds are interrupted by silted-up tidal creeks, called palaeochannels. Because of coastal erosion, the layers are visible at countless places on the shores of the Levels, but ditch-cleaning, boreholes and development activities show that they also range far inland beneath the surface of the Levels.

The Wentlooge Formation (i.e. the Upper Clay, Lower Clay and the Peat) has been deposited over a flat rock surface of Mercia Mudstone (or Keuper Marl as it is commonly known). The flat ground reflects the flat lying Wentlooge Formation but some 1km to the north, the ground surface rises to a series of low hills at the village of Bishton. The available geological plan reveals that the hills comprise Blue Lias, a sequence of limestone with calcareous clay bands. Above the lias, near the hilltops is a sequence of clays with limestone bands. This more erosive resistant sequence has formed the higher ground around which the Wentlooge Formation clays and peats have been deposited.

3.3 Hydrogeology

Ground conditions around the site have been investigated through drilling and the installation of groundwater wells. Therefore, groundwater can be monitored and sampled at several locations around the perimeter of the site (see Figure 6). The wells are screened in the shallow waste deposits (shallow groundwater) and in the deeper bedrock.

Groundwater in the waste is typically encountered at shallow depths (typically 1 to 2 metres) at an elevation of between 3.9m AOD and 4.6m AOD. The water lies within the highly permeable fill materials, which comprise principally steel making slag. Permeabilities in this material have been previously found to be approximately 10^{-4} ms^{-1} . The water body in the fill materials has been found to be perched on the Upper Clay layer. This has been found to have permeability values of 3.9×10^{-10} , 4.2×10^{-10} and $9.2 \times 10^{-10} \text{ ms}^{-1}$, indicating a stratum of consistently very uniform low permeability.

An examination of the cross sections in Figure 5 and the conceptual hydrogeological model in Figure 7 shows that the fill materials have been placed into a shallow excavation in the clay. This is consistent with historical information which indicates that the site was previously used for water settlement lagoons. The lagoons were dug and embankments constructed around them to contain the water. When the lagoons were decommissioned, they were backfilled with steel slag wastes and thus the water body in the made ground is contained by the clay materials.

Beneath the upper clay layer, damp peat has been found in each of the boreholes previously drilled with no discernible water strikes. Based on field measurements, the peat has been previously found to have low permeability, ranging from 7.2×10^{-6} to $4.83 \times 10^{-7} \text{ ms}^{-1}$ with an average of $2 \times 10^{-6} \text{ ms}^{-1}$.

In every borehole a second, lower clay layer was previously encountered beneath the peat horizon. Samples of the clay have been subjected to simple classification tests to compare its physical composition to that of the upper clay layer. This revealed that the two clay layers are almost identical in composition, grading and strength and therefore the likelihood is that the permeability of the lower clay layer will also be very similar to the upper clay.

Beneath the lower clay, Mercia Mudstone bedrock was encountered in each of the previous boreholes. In each case it was overlain by a thin layer of sub-rounded gravels with localised clays and silts forming the matrix. Recharge to the gravel layer is almost certainly due to the underlying bedrock aquifer, nevertheless, permeability tests were undertaken which revealed permeabilities averaging $3.6 \times 10^{-5} \text{ ms}^{-1}$. The underlying bedrock was investigated by three deep boreholes (16m) drilled by rotary methods. Surprisingly, permeability tests revealed a stratum permeability ranging from 1.5×10^{-6} to 2.9×10^{-4} , with an average of $1.3 \times 10^{-4} \text{ ms}^{-1}$. Geotechnology considers that this is most likely due to fracture flow or secondary permeability rather than primary permeability related to porosity, which is known to be low in the Mercia Mudstone.

The second principal water body beneath the site was encountered in the Mercia Mudstone bedrock. Water levels rose rapidly upon intersecting the bedrock or the directly overlying gravels during drilling to an elevation of 2.9m AOD in Borehole 1 (north of the site) to 2.64m in Borehole 6 and 2.63m in Borehole 4 (south of the site).

3.4 Groundwater Flow

3.4.1 Shallow Groundwater

Groundwater flow in the shallow fill has been historically examined by contouring the piezometric surface, as shown using historical data in Figure 8. The levels, based upon 6 boreholes and 5 trial pits, reduce in elevation from east to west and from centre to north and south. This is not unexpected. A surface water drain, transmitting water from nearby parts of the plant follows the western edge of the landfill at a level controlled by a weir at Drain 10. This water, destined for the works effluent treatment plant is considered to act as a fixed head in the fill materials, controlling the rise of groundwater above this level. This mechanism, therefore, also provides an opportunity for groundwater lowering by reducing the fixed head.

On the southern and northern corners of the site, ditches have been excavated to collect groundwater. From these ditches it is piped into effluent drains 9 and 10 for treatment. These ditches also act as fixed heads controlling groundwater levels in the near surface fill.

With heads controlled on the western, southern and northern edges of the site and no formal control system on the eastern boundary, groundwater levels are elevated in the east. At the time of the previous assessments, this was not problematic for surface water as the elevation of the water surface (4.6m AOD) is less than the elevation of the clay layer between the land raise and Hundred Perches Reen (5.3m AOD). There is also a low permeability bund constructed along the eastern boundary that was used to contain the original water settlement ponds. Consequently, a steady state flow system may be

established from east to west due to the combination of infiltration recharge through the wastes and the head maintenance at the ditches.

The water flowing in the fill is recharged by infiltration through the waste mass. This is considered to be leachate formed as a result of precipitation, infiltration and subsequent mounding within the waste mass. With the head distribution and flow pattern shown on Figure 8 there is no lateral recharge and therefore, the fill through which the leachate flows could reasonably be considered to be the leachate drainage blanket.

3.4.2 Deeper Groundwater

Groundwater flow in the Mercia Mudstone aquifer has been previously established by drilling three piezometers into the rock and measuring the piezometric head. The groundwater levels are sub-artesian and are confined by the lower clay layer. Upon piercing the lower clay and the clayey basal layer, groundwater was seen to rise to 2.9m AOD in the north of the site to 2.6m AOD in the south. Consequently, a very shallow groundwater gradient from north to south was previously detected, as shown on Figure 8.

Groundwater flow and movement between the upper shallow leachate body and the Mercia Mudstone aquifer is poorly understood. The presence of layers of contrasting permeability is likely to have resulted in a degree of groundwater stratification.

3.5 Groundwater Quality

The overall risk from the site to groundwater and environmental receptors was previously described in the Hydrogeological Risk Assessment (HRA) submitted as part of the original Closure Report (see Geotechnology report 525.1/0/0207). The LandSim model identified that at no time do List 1 substances reach groundwater below the facility. Therefore, the site is not predicted by the model to pose a risk to groundwater quality from hazardous substances throughout the facilities full life cycle and complies with the requirements of the Groundwater Directive. With respect to non-hazardous pollutants, all predicted concentrations at the compliance point were below the established Environmental Assessment Levels, indicating that there is no significant deterioration in groundwater quality.

To ensure that the LandSim predictions are calibrated and that the risks posed are continually monitored, a groundwater monitoring programme was developed.

3.6 Leachate

As the landfill is not lined and has no formal leachate collection and management system there is no way of directly monitoring leachate within the waste.

Since 2016, samples have started to be collected from the leachate collection ditches at positions EL1 and EL2, as shown on Figure 6.

3.7 Surface Water

Due to the inclusion of a low permeability bund on the eastern side of the landfill there is a very low risk of surface run-off entering the re-en system to the east. However, to ensure

that the situation is monitored, two sample points have been identified upstream (SW1) and downstream of the landfill (SW2).

3.8 Landfill Gas

A landfill Gas Risk Assessment (GRA) has been carried out to quantify the gas emissions profile from the existing waste mass (see Geotechnology report 525.1/0/0207). The assessment was carried out using the quantitative landfill gas generation model GasSim. The GRA established the risks to receptors, including the global atmosphere from gases evolved due to the degradation of the wastes that are currently placed.

The Landfill Regulations requires that gases evolved at landfill sites are subject to energy recovery, principally by electrical power generation and where this is not technically feasible, are flared. As the site produces insufficient gas for energy recovery, the EA Guidance on the Flaring of Landfill Gas applies.

The net rated thermal input for the gases evolved at LEWMS peaked in 2001 and has already fallen from 3.8 MW to 2.3 MW. Flaring is stated in the guidance to be practical only when gas yields exceed 100m³/hr at 50% methane concentration, i.e. a net thermal input 0.5 MW. Gases evolved at a slower rate than this cannot be practically treated by flaring or by energy recovery plants. For this reason, the GasSim simulations were undertaken with a flare which becomes active at a gas flow rate of 100m³/hr and inactive below this.

The site is expected to continue to evolve gases at a rate that could be potentially treatable by batch flaring until 2020, when yields are dropping as the waste stabilises. Outside these periods, the self-sustained thermal treatment of gas by flaring is not a viable option. In the absence of a viable self-sustaining thermal treatment process there are few options for gas treatment. The options available were reviewed in the previous Closure Report (see Geotechnology report 525.1/0/0207). The conclusion of the previous assessment was that a bio-filter was the only potential option for landfill gas treatment.

As the site is progressively capped from the south to the north, a gas drainage and collection infrastructure will be placed within the cap. By covering with a gas drainage blanket, surface emissions from the waste will be collected although these are not expected to be of significance. Monitoring of landfill gas has been undertaken since 2016 at GM1, GM2 and GM3, although these points are not currently accessible as the site is not currently accessible due to the outbreak of knotweed.

4 REGULATORY FRAMEWORK

4.1 Aftercare Monitoring Plan

As part of the 2008 Closure Report, an Aftercare Monitoring Plan (AMP) was presented (see Geotechnology report 663.1/0/0408). The plan provided details of the monitoring proposed during the aftercare period. Frequent monitoring of groundwater and surface water by Tata during 2014 and 2015 enabled a good dataset to be developed and in the previous annual report a modified, rationalised monitoring programme was suggested by Geotechnology (see Table 4-1). This modified programme was initially implemented during 2016 as it was more closely aligned to the AMP. The analytical parameters analysed are summarised in Table 4-2.

Table 4-1 Proposed Monitoring Schedule

Monitoring Parameter	Monitoring Location	Frequency	Type of Monitoring Point	Monitoring Point Reference
Leachate	In ditches on SE, N and W sides of landfill	Quarterly for one year	Pre-formed open ditch	L1 and L2
Groundwater	Groundwater at boundary of landfill, with concentration to the hydraulically down gradient side – S	Quarterly	50mm diameter piezometer wells	BH1 to BH7 inclusive excluding BH4 & BH6
Surface water	Surface-water on eastern and southern side of site	Monthly	Surface water body comprising reens	SW1 and SW2
Gas	Internally within the landfill	Quarterly	Gas Well/Vent – gas tap on side	GM1, GM2 and GM3
Dust and Particulates	As required	As required	Dust gauges as required	Referenced in number and chronological order
Odour	As required	As required	Subjective assessment in particular area	Referenced in number and chronological order
Settlement	Landfill surface following restoration	Annual	Topographic survey of settlement plates	Settlement Plates
Stability	Landfill embankments	Annual	Visual observation	All flanks

Table 4-2 Analytical Programme

Measurement	Groundwater, surface Water and Leachate Characterisation Suite	Groundwater, surface Water and Leachate Indicator and Field Suite
Monitoring Positions	All surface water, groundwater and leachate monitoring locations	
Frequency	Annually	All other times
Water Level	•	•
Temperature	•	•
pH	•	•
Electrical Conductivity	•	•
Dissolved Oxygen	•	•
Ammoniacal Nitrogen	•	•
Total Oxidised Nitrogen	•	
Total Suspended Solids	• (surface water only)	• (surface water only)
BOD	•	
COD	•	
Total Organic Carbon	•	
Aluminium	•	
Arsenic	•	
Antimony	•	•
Boron	•	
Cadmium	•	•
Chromium	•	
Chromium (vi)	•	
Copper	•	•
Iron	•	
Lead	•	•
Manganese	•	
Mercury	•	
Molybdenum	•	
Nickel	•	
Phosphate	•	•
Silica	•	
Titanium	•	
Tin	•	
Vanadium	•	
Zinc	•	
Calcium	•	•
Magnesium	•	
Nitrate	•	
Nitrite	•	
Sodium	•	
Potassium	•	
Selenium	•	
Sulphate	•	
Total Alkalinity	•	•
Chloride	•	•
Organohalogens (VOCs)	•	
Semi VOCs	•	

The AMP indicated that the analytical data should be reviewed to identify parameters from the characterisation suite that should be included in the indicator suite. The parameters listed as part of the Indicator suite may, therefore, be subject to change to ensure the monitoring programme is tailored to site specific data requirements. The AMP also indicated that the suitability of the analytical suites should be reviewed annually.

4.2 Control and Trigger Levels

At this stage, Geotechnology is not aware of any formal control and trigger levels established for the assessment of surface water and groundwater monitoring data. Geotechnology suggests that these should be formally developed once the capping and restoration works are complete as these activities may influence the monitoring results in the short-term.

5 MONITORING PROGRAMME

5.1 Integrity of Monitoring Infrastructure

The full monitoring network available to Tata is shown in Figure 6 and summarised in Table 5-1.

Table 5-1 Monitoring Point Locations

Monitoring Reference Point	Purpose	Monitoring Interval	Type	Safety/ Access
BH1	Up gradient Groundwater Monitoring	Shallow and Deep Groundwater	Borehole	Require permit to sample - walk/vehicular access
BH2	Up gradient Groundwater Monitoring	Shallow and Deep Groundwater	Borehole	Off road/High Vis. Jacket - walk/vehicular access
BH 3	Up gradient Groundwater Monitoring	Shallow and Deep Groundwater	Borehole	In wooded area on eastern flank – walk on access
BH 4	Down gradient Groundwater Monitoring	Shallow and Deep Groundwater	Borehole	On corner of lorry access – walk/vehicular access
BH 5	Down gradient Groundwater Monitoring	Shallow and Deep Groundwater	Borehole	Next to exit point of Drain 10
BH7	Down gradient Groundwater Monitoring	Shallow and Deep Groundwater	Borehole	In rear of lorry park - walk/vehicular access
EL1	Leachate quality monitoring	Surface water	From water body itself	Close proximity to strongly alkaline open ditch with potentially deep water
EL2	Leachate quality monitoring	Surface water	From weir system	Close proximity to strongly alkaline open ditch with potentially deep water
SW1	Surface water quality	Surface water/Run-off	From water body itself	Close proximity to deep water of Hundred Perches Reen
SW2	Surface water quality	Surface water/Run-off	From water body itself	Close proximity to deep water of Hundred Perches Reen
GM1	Measure internal gas presence in landfill	Landfill Gas	Gas Well	On landfill cap
GM2	Measure internal gas presence in landfill	Landfill Gas	Gas Well	On landfill cap
GM3	Measure internal gas presence in landfill	Landfill Gas	Gas Well	On landfill cap

Note: Geotechnology suggests that each groundwater well is inspected to ensure monitoring interval is still accessible

Each time samples are collected by Geotechnology the monitoring infrastructure is inspected.

5.1.1 Leachate Monitoring

Leachate monitoring currently comprises a walkover survey of the landfill edge, to examine for the presence of any leachate breakout and sampling from the perimeter ditches at positions EL1 and EL2, as shown on Figure 6.

Suspected leachate breakout has been observed on the eastern flank of the site and reported to Tata. Tata rapidly implemented the construction of a low permeability bund to trap the breakout and the situation is being actively monitored.

5.1.2 Groundwater Monitoring Infrastructure

Groundwater monitoring boreholes are available to monitor water levels and chemistry within the shallow groundwater within the waste and the underlying deep groundwater encountered in the Mercia Mudstone.

The monitoring positions available (BH's 1 to 7) are shown on Figure 6. All positions are currently inspected quarterly to ensure that they provide suitable monitoring infrastructure.

At this stage, the headworks of each well are in good condition but the access to BH3 should be improved as the vegetation is very dense, particularly during the summer months. Each headworks are unlocked but the site is secure.

5.1.3 Surface Water Monitoring Infrastructure

No further improvements are required. All samples are collected with a telescopic sampling rod to avoid personnel coming into close contact with water.

5.1.4 Internal Gas Monitoring Infrastructure

Landfill gas monitoring infrastructure comprises three dedicated gas wells on the surface of the landfill which incorporate gas taps.

Each well is surrounded by a concrete ring preventing damage from plant. Each well has been protected during the ongoing restoration works and extended through the new layer of restoration soil.

No monitoring has been undertaken during 2018 as the site has not been accessible whilst soil quality is being inspected and management options developed

5.1.5 External Gas Monitoring Infrastructure

There is no external gas monitoring infrastructure.

5.2 Analytical Testwork

All aspects of the analytical and monitoring programme are directly managed by Tata Environment Department. Under the direction of the Environment Department, Geotechnology and Testing Solutions Wales (the analytical laboratory) undertake several aspects of the sampling and analysis. These include surface water and groundwater laboratory analysis and measurement of groundwater levels. Tata Environmental Department undertakes all other monitoring aspects, when required. All analysis is undertaken by Testing Solutions Wales based at the Engineering Centre for Manufacturing and Materials (ECM) in Margam, adjacent to the Port Talbot steelworks.

5.3 Actions required

- Suspected seasonal leachate breakout on eastern flank of site should continue to be monitored
- Access to BH3 should be improved and maintained once site is accessible

6 TOPOGRAPHIC SURVEY AND SETTLEMENT MONITORING PROGRAMME

Once the landfill surface is restored and capped, the final surface topography will be surveyed and settlement monitoring plates installed. The plates will then be surveyed at regular intervals to assess for waste settlement.

7 LEACHATE LEVEL AND QUALITY

7.1 Level

As the landfill is cleared of vegetation, reprofiled and then capped, waste which has not been exposed for several years will be temporarily open to oxidation and leaching prior to capping. During this time, there is a possibility that the leachate elevation and quality will change.

7.2 Leachate Collection Ditches

As the landfill is not formally lined, the only way of indirectly monitoring leachate quality is to sample the leachate collection ditch that runs along the western toe of the landfill. This started to be monitored in 2016.

As anticipated, the monitoring reveals that surface water running in the leachate collection ditch is dominated by leaching of slag wastes and is characterised by high pH, alkalinity and calcium and low metals. The mobility of many metals will be reduced under the strongly alkaline conditions. In 2018, pH was persistently over 12 and EC typically over 4000 microS/cm and dominated by Ca-HCO₃. Ammonia and phosphate were frequently elevated but most trace metals are at low levels. The ditches drain to the on-site works treatment facility.



Plate 1. Leachate Collection Ditch at southwest corner of site

8 GROUNDWATER LEVEL AND QUALITY

8.1 Groundwater Flow

Historic groundwater monitoring data (although incomplete) has indicated that head loss, and therefore water movement, has been predominantly from the east to the west. With the benefit of more recent data from BH3 (when accessible through dense vegetation) the scenario is a little more complicated.

Based on available monitoring data from the last few years it would appear that the hydraulic gradients are shallow and sometimes lowest in the east at BH3 in both the shallow and deep aquifers (see Figures 9 and 10). Interestingly, in September 2017, the reverse was true in the deep aquifer. An outbreak of leachate has been observed on the eastern side of the site (just south of BH3) and this would appear to be coincident with the low point in the system. Tata is closely monitoring this position and has already informed NRW (who has also visited the site). A temporary bund to protect the adjacent reed has been constructed.

Groundwater levels and flow patterns are likely to change as the site is progressively capped. Time series plots of current groundwater levels are included in Appendix 1.

8.2 Shallow Groundwater

As expected, sampling of shallow groundwater in close proximity to the site reveals that it is impacted by infiltration that has passed through the unlined waste body and the surrounding exposed areas. As these areas are dominated by mixed wastes and slag, the shallow groundwater is characterised by elevated pH, electrical conductivity and alkalinity (see time series charts in Appendix 1). The water chemistry shares several similarities with that detected in the leachate collection ditches.

As noted previously, groundwater in close proximity to the landfill typically contains low levels of non-hazardous substances which infrequently exceed Environmental Quality Standards. During 2018, the levels observed were comparable to, or lower than, those noted previously. As noted previously, there are short-term variations. The cause of these short-term variations is unclear but there is no data to suggest that shallow groundwater quality is deteriorating in terms of trace metal content. The variations could be due to variable leaching of the waste mass prior to capping and the occurrence of oxyanions in the high pH environment.

During 2016, no inorganic hazardous substances were detected. In 2017, cadmium was detected at 0.0007 mg/l at BH1S and 0.00015 mg/l at BH5S. On all other occasions the concentrations were below analytical detection limits. During 2018, no inorganic hazardous substances were detected in shallow groundwater.

8.3 Deep Groundwater

The levels of non-hazardous and hazardous substances in the deep groundwater are similar to that observed in the shallow groundwater i.e. low and rarely in excess of EQS values. However, the deep groundwater is distinct in terms of pH as pH is significantly lower at approximately pH 8. As this pH is lower than that encountered in the shallow groundwater, the data suggests that there is persistent limited hydraulic connection between the two water bodies, as would be expected due to the low permeability sequence of sediments

present. However, the two water bodies (shallow and deep) have similar mineralised content with several dominant ions, including alkalinity, ammonia and chloride at comparable concentrations and sometimes higher in the deeper groundwater. Interestingly, the highest concentration of alkalinity detected in deep groundwater is at BH1 but this position has one of the lowest concentrations of alkalinity in the upper made ground. During 2018, cadmium was detected at two positions in September 2018; at BH1D 0.0003 mg/l was detected and at BH7D 0.0002 mg/l was detected.

In this context, the data from BH7 appears anomalous as the pH at BH7 is similar to that in the made ground. Geotechnology has checked this installation to ensure that the headworks are in satisfactory condition and there were no obvious visual surface defects. The geological logs and borehole depths have also been verified. The data from this point, therefore, appears indicative of potential connection between groundwater perched in the made ground and underlying groundwater. The cause of this connection is unclear. Consideration could be given to decommissioning and replacing, as suggested previously.

9 SURFACE WATER

9.1 Reen Hydrochemistry

The results of the surface water monitoring are presented in Appendix 2.

With one position upgradient (SW1) and one position downgradient (SW2), one of the aims of the surface water monitoring programme is to detect any influences leaching of the waste mass may be having on local surface water between these two points (see Figure 6).

The latest monitoring data continues to indicate that upgradient and downgradient surface water chemistry is generally very similar. However, there are times when there are abrupt changes in several parameters including pH and alkalinity. Subtle differences in the concentration of sodium, potassium, chloride, sulphate and alkalinity are also apparent and as leachate has been observed along this flank and as the waste in the landfill is being exposed during the restoration works, this aspect of the monitoring programme should continue to be closely scrutinised. Recent inspection of the adjacent reen indicates that the reen is cut into low permeability deposits and that there are no obvious visual signs of staining indicative of leachate (see Plate 2). At this stage, there is no clear evidence that the reen quality is being impacted by the landfill.



Plate 2. Reen flowing from right to left along eastern side of site.
Landfill can be seen in background beyond tree.

Continued scrutiny of upstream influences is also required as observations in December 2016 (see Plate 3) suggest that there are upstream sources of suspended solids.



Plate 3. Suspended solids in surface water upstream of site

9.2 Contingency Actions Taken

No specific contingency actions were required but Tata is actively managing and observing the potential leachate breakout along the eastern flank in order to identify if further measures are needed to ensure the adjacent ree is not impacted.

10 LANDFILL GAS

Internal landfill gas monitoring started in 2015. Since 2016, monitoring has only been undertaken on two occasions as access to the site has been restricted whilst the quality of imported soils containing knotweed is inspected.

The relatively small amount of data gathered to date indicates that the waste is consuming oxygen and generating moderate levels of methane and carbon dioxide (<20% v/v) at variable concentrations but flow is low (<0.1 l/h). As the gas is still free to vent to the atmosphere, only when the site is fully capped can a more representative assessment be made.

11 AMENITY ISSUES

There have been no complaints received and no specific additional requirements for any dust, noise or odour monitoring.

12 SUMMARY AND RECOMMENDATIONS

12.1 Evaluation and Summary


The current monitoring programme has confirmed historical observations; shallow groundwater is impacted by leachate from the unlined waste mass. Due to the network of shallow drainage ditches around the landfill shallow leachate is being intercepted and directed to the works effluent treatment plant. Potential leachate breakout has been observed on the eastern edge of the landfill and as this could potentially impact surface water, Tata is monitoring and has improved surface drainage in this area.

12.2 Actions Required

- Suspected leachate breakout on eastern flank of site should continue to be monitored
- Vegetation in the vicinity of several sampling points requires routine clearance to enable continual safe access.
- Access to BH3 should be improved and maintained once the site is accessible

As capping works are currently on hold, rainwater is infiltrating the waste as the vegetation has been stripped. A plan of action for improving the current situation should be made, particularly if capping works are to be re-started in the summer months.

Figure 1 Site Location Plan

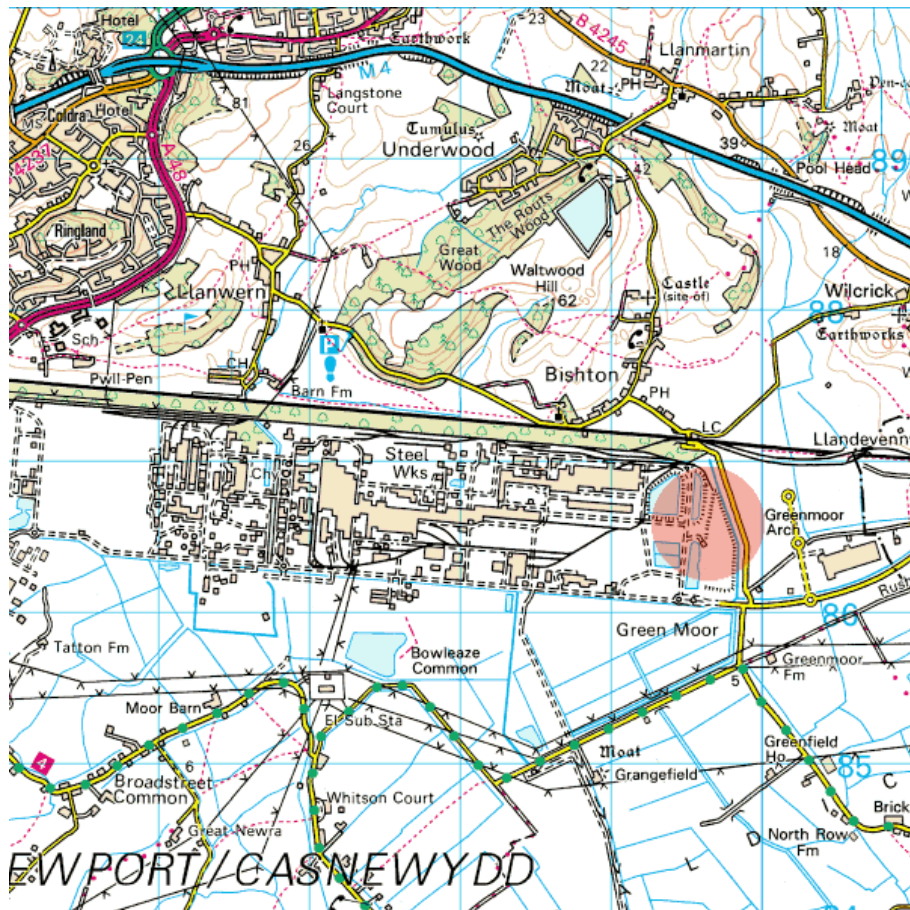

Reproduced from the Ordnance Survey Land Ranger Map
with the permission of The Controller of Her Majesty's Stationery Office
© Crown Copyright. Geotechnology SA10 8HE Licence No AL50598A

Figure 2 Environmental Setting

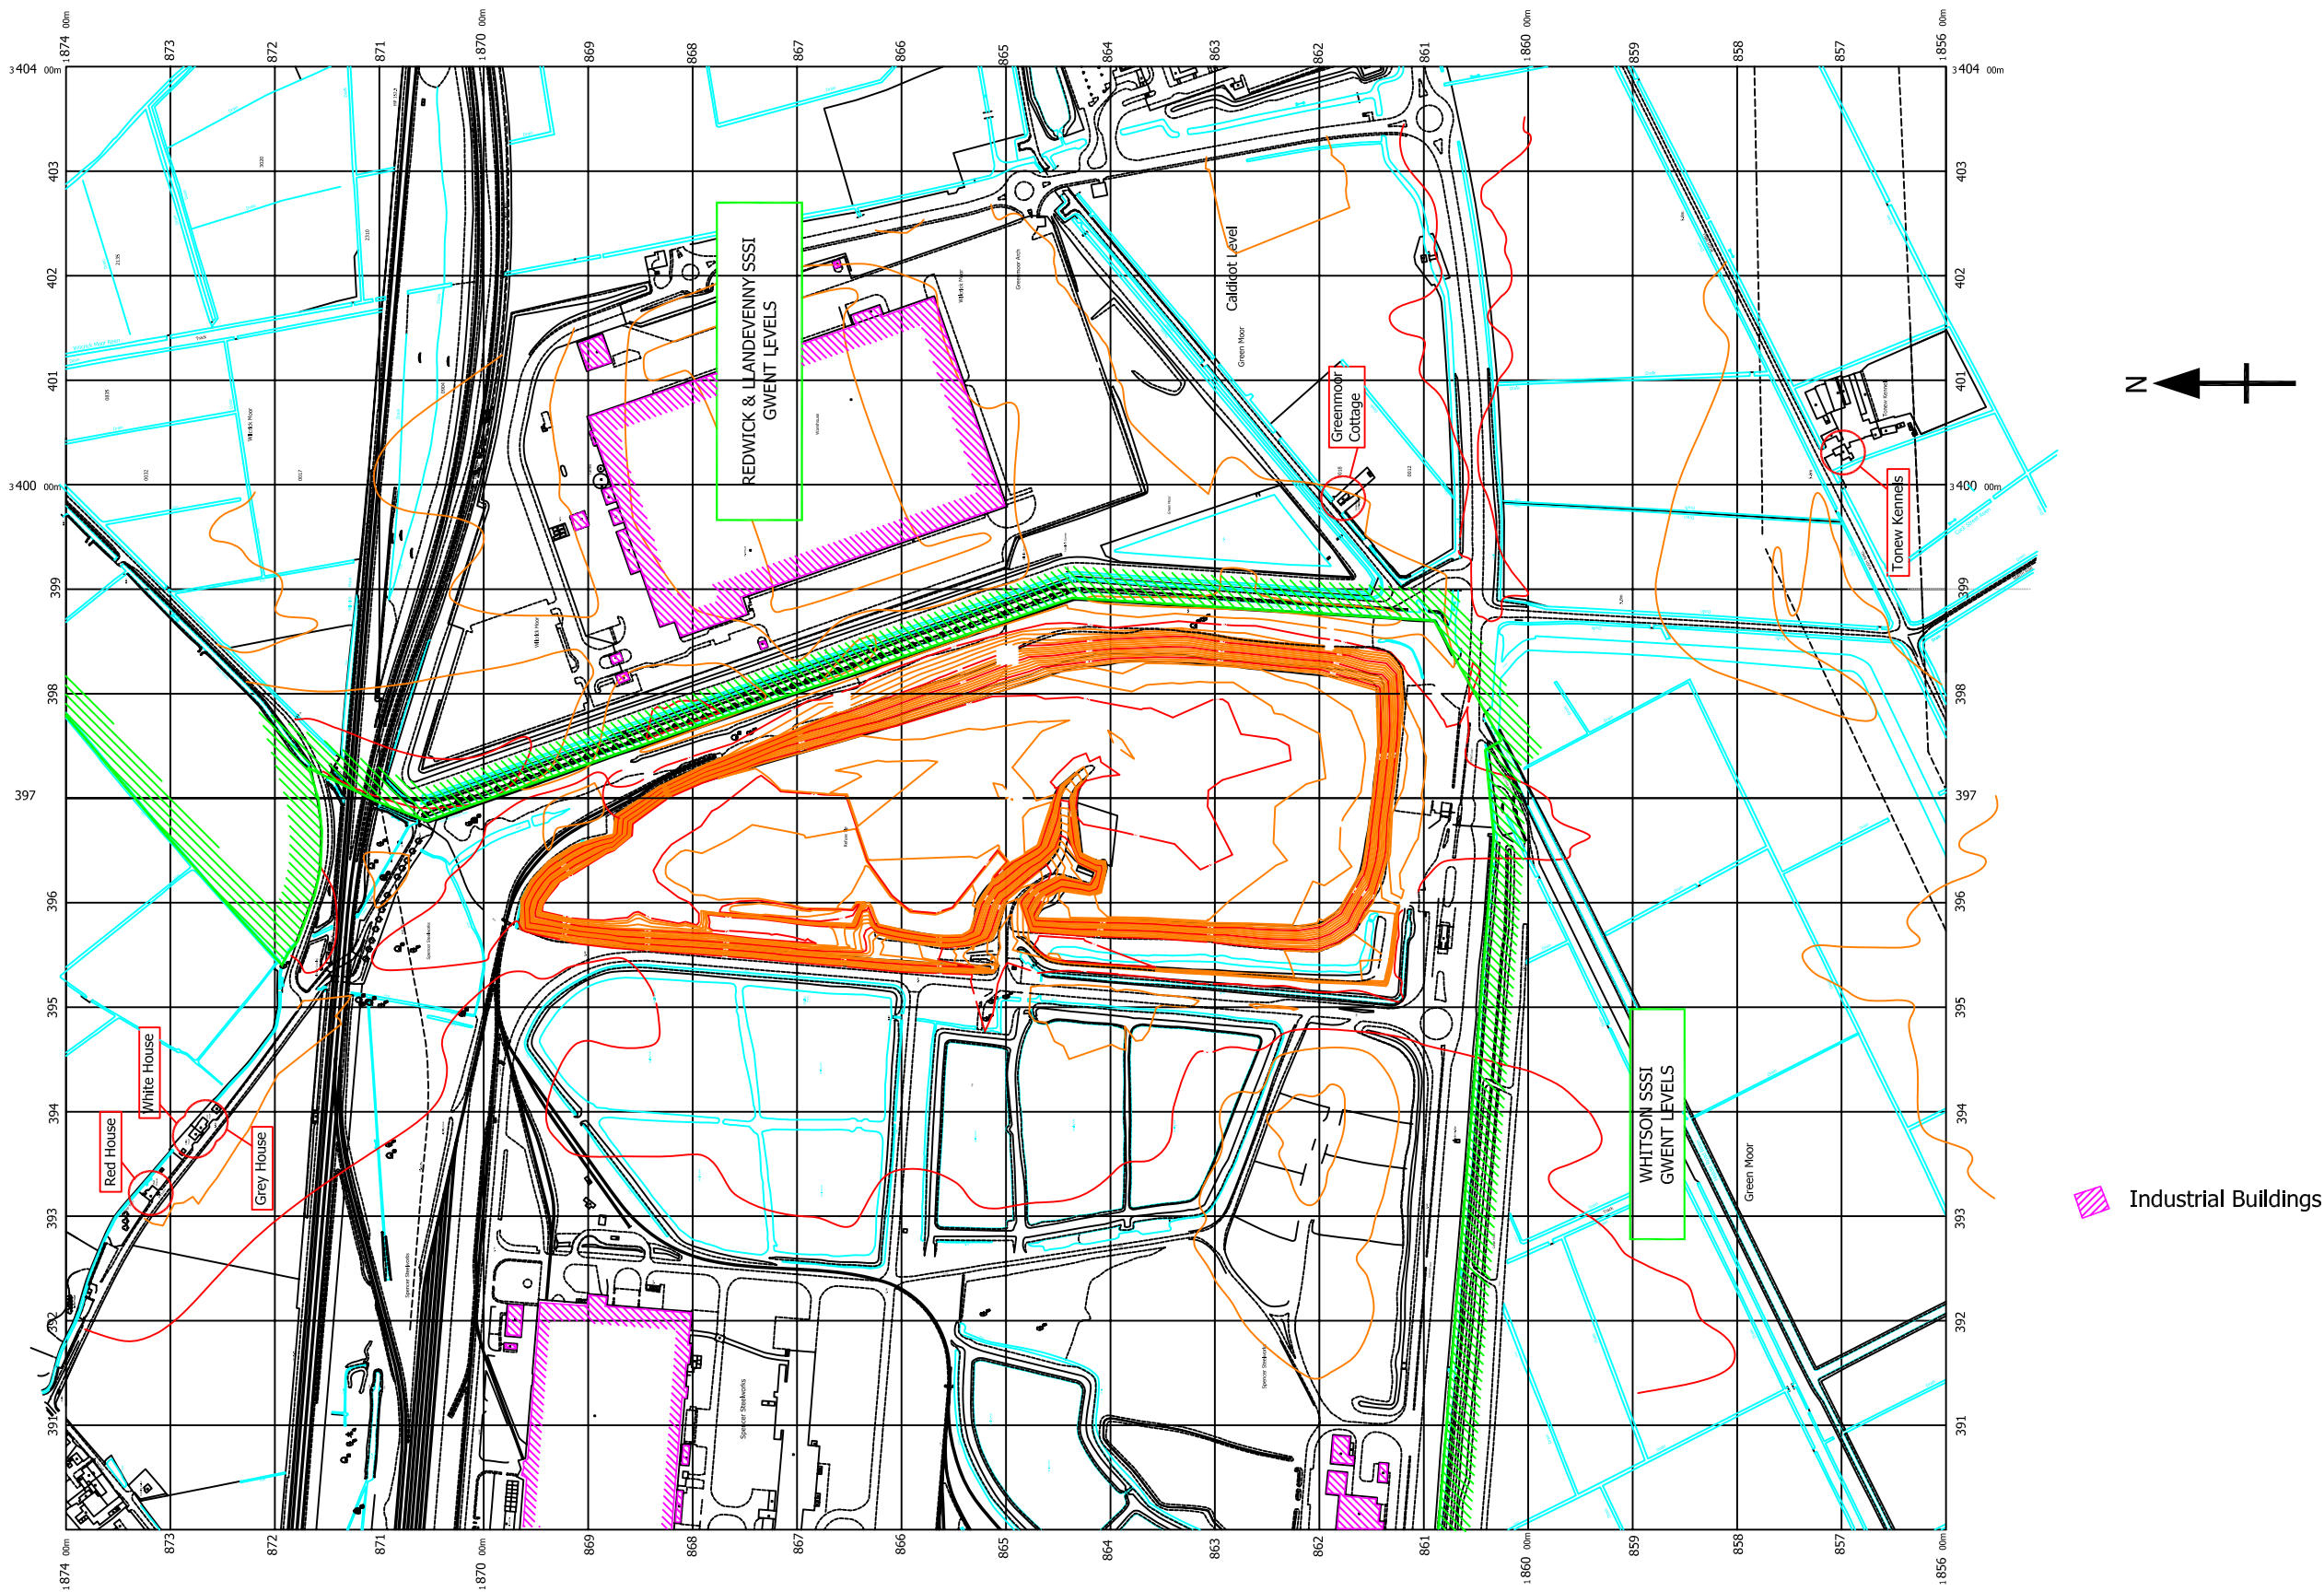


Figure 3 Hydrology

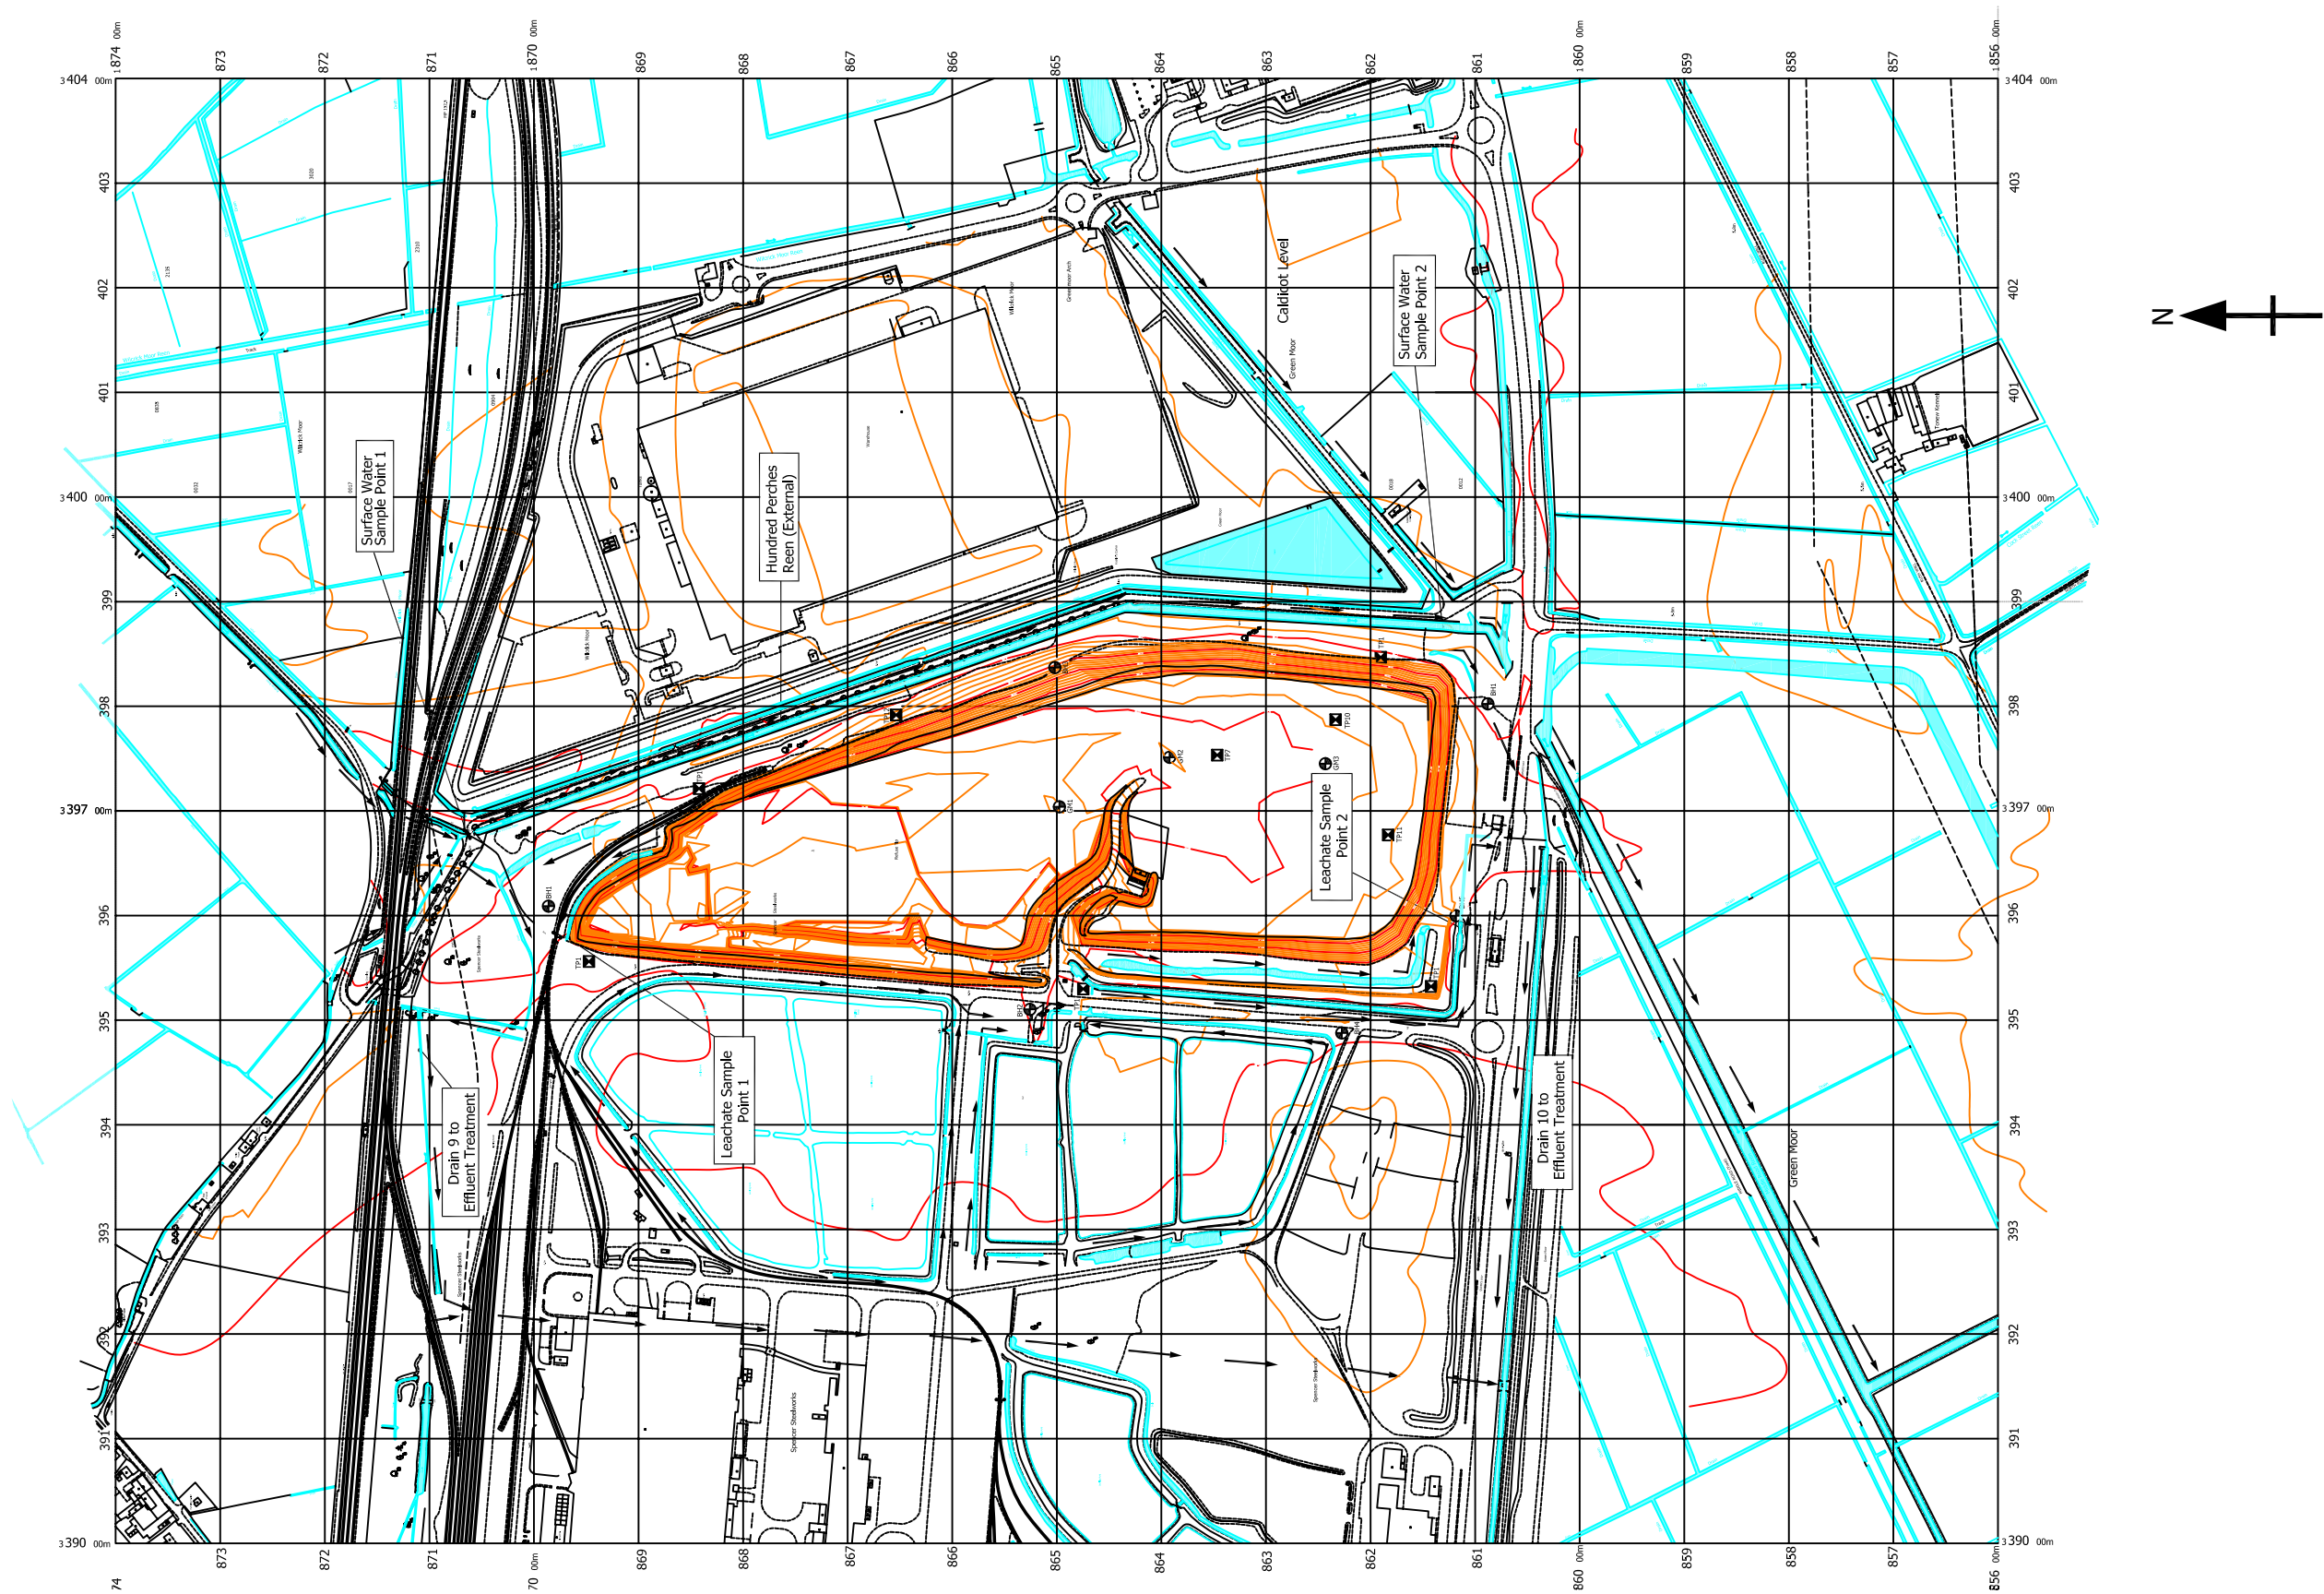


Figure 4 Site Investigation Locations



Figure 5 Geological Cross Sections

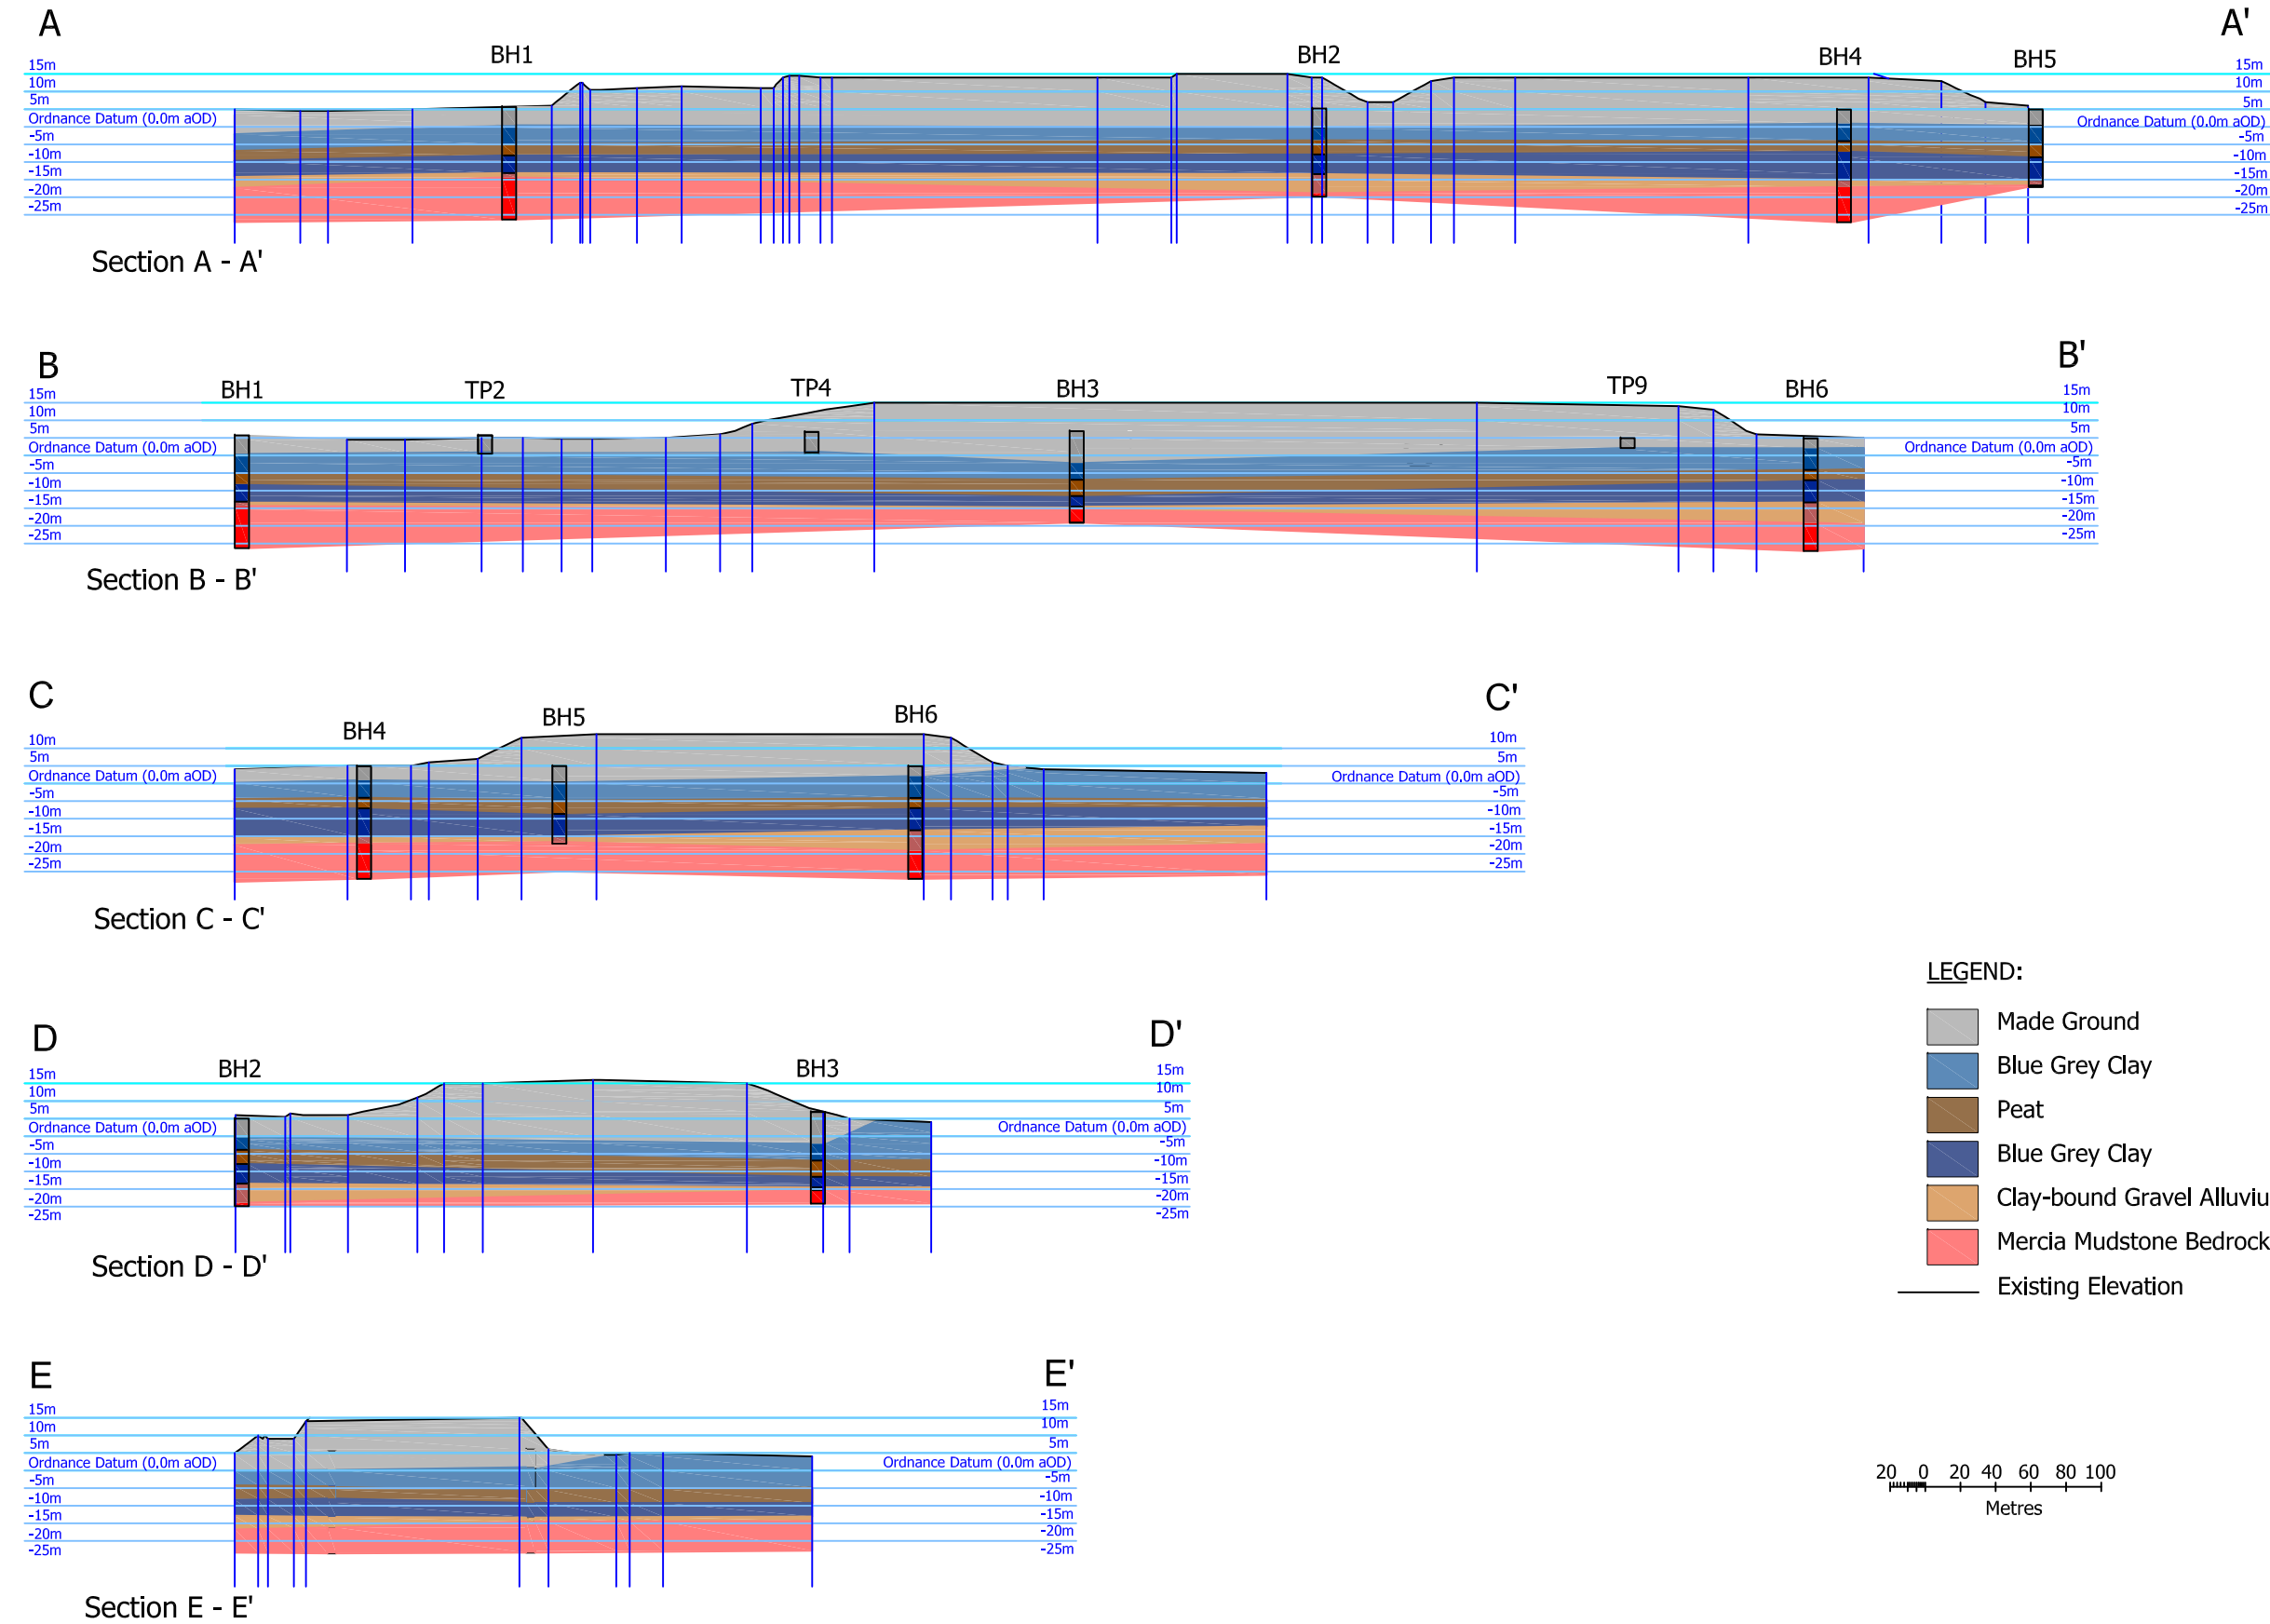


Figure 6 Available Monitoring Newtownk

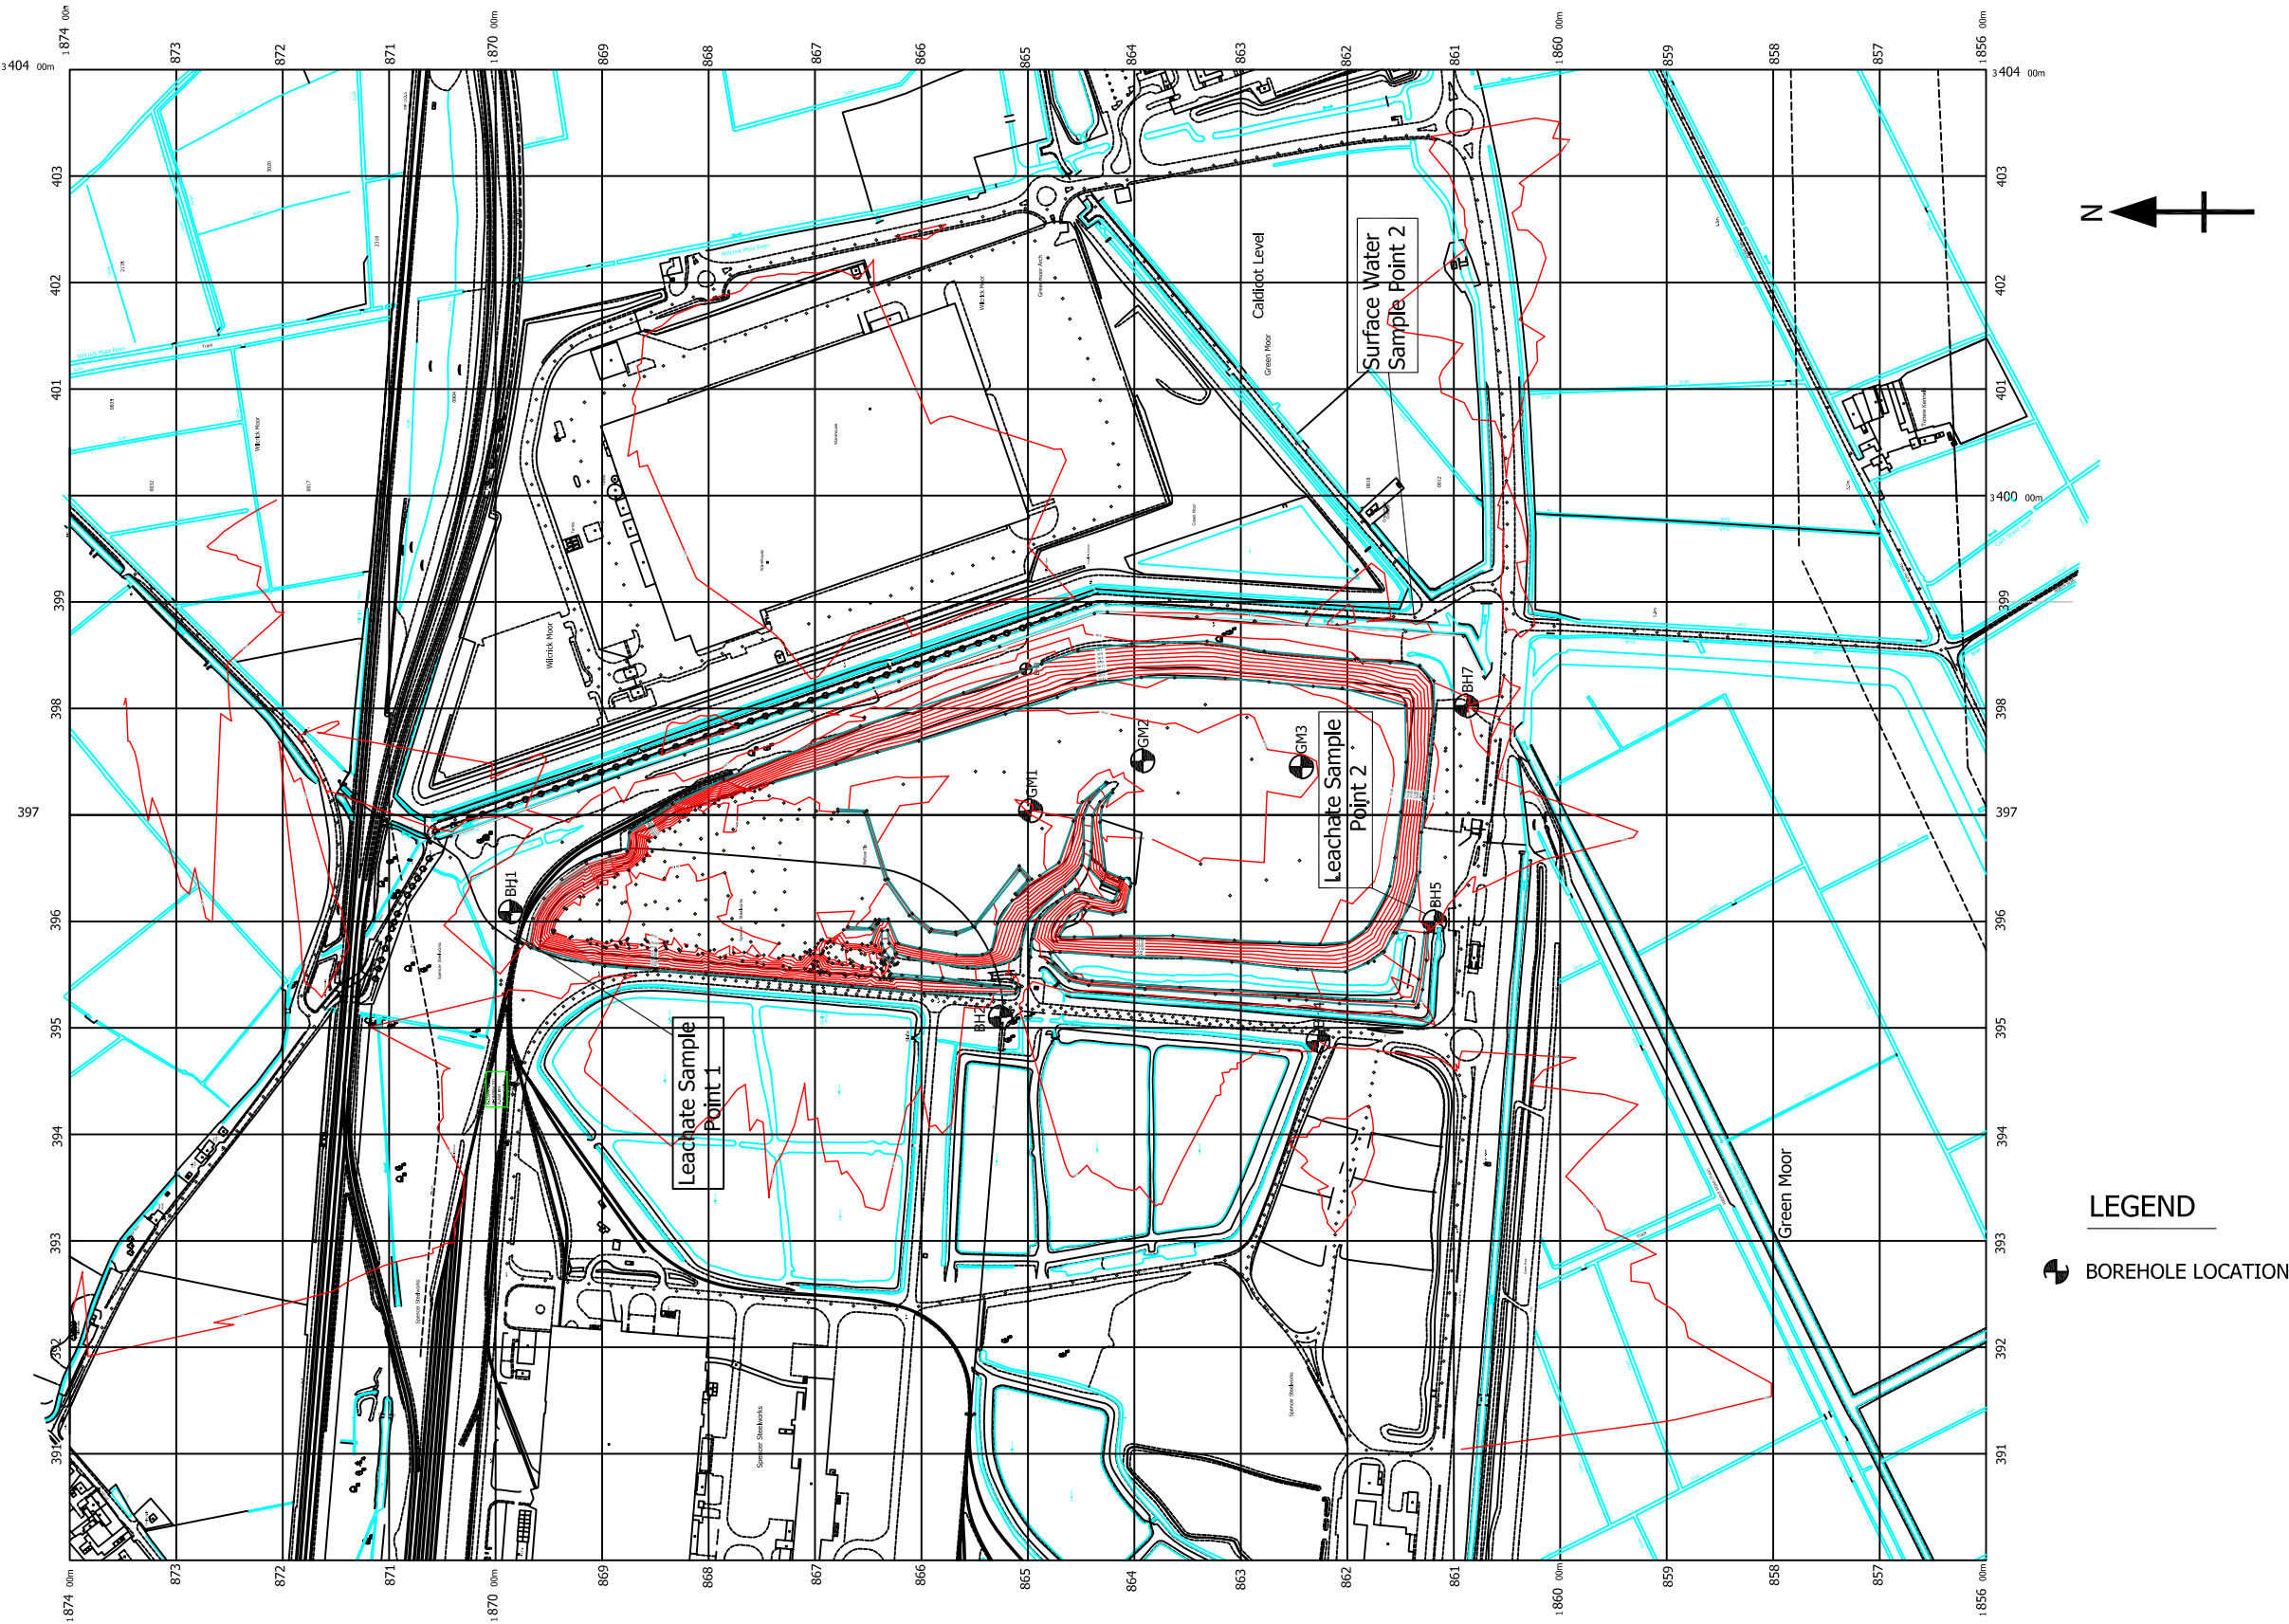


Figure 7 Hydrogeological Conceptual Site Model



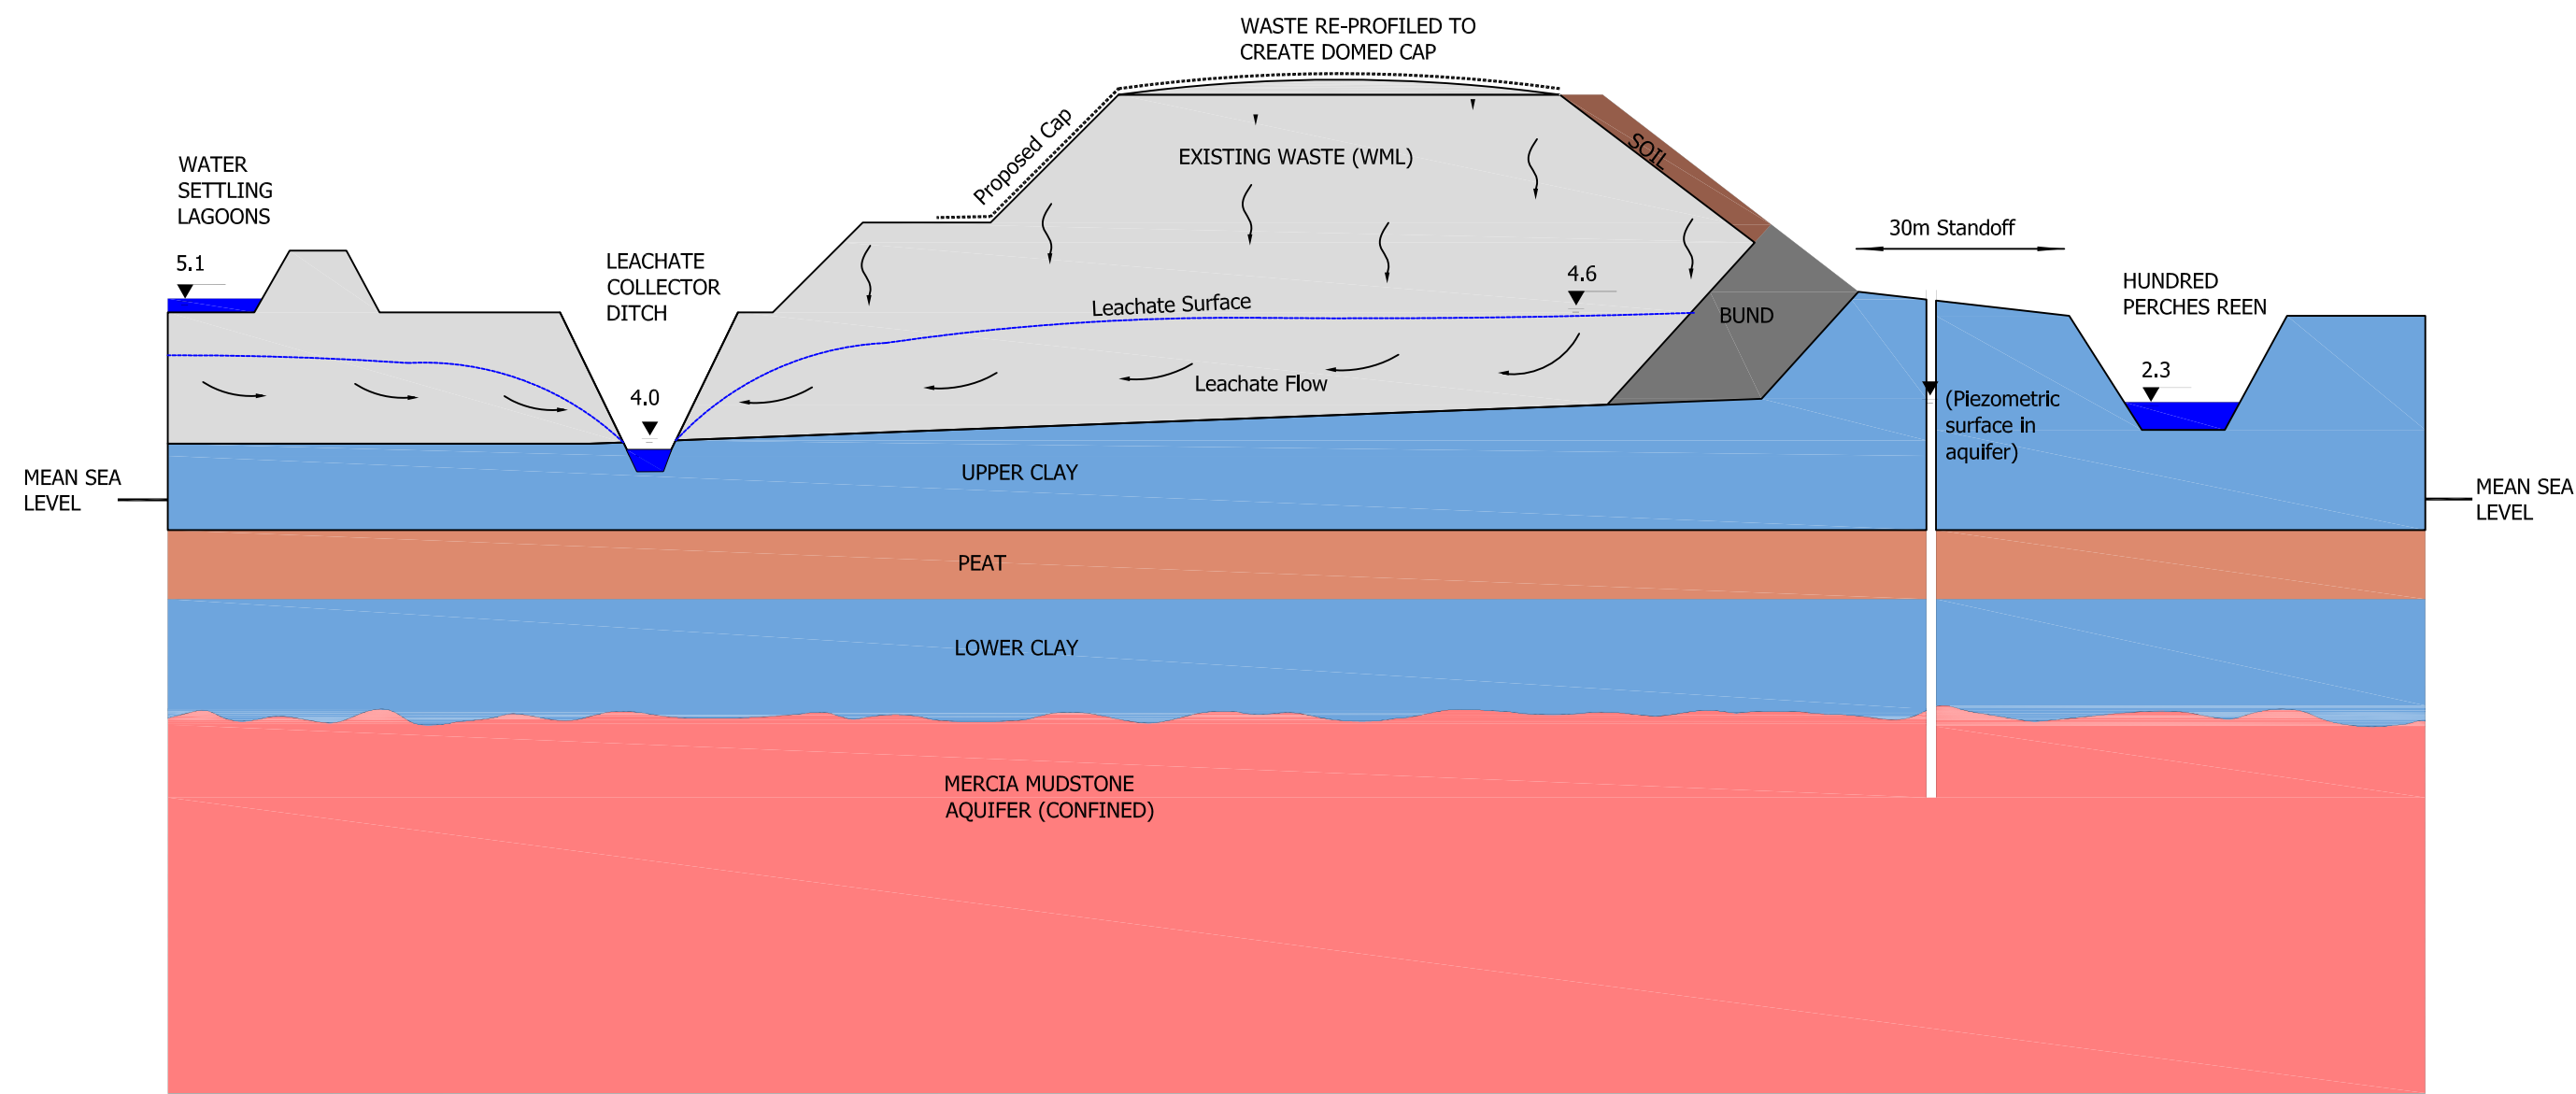


Figure 8 Historical Groundwater Levels




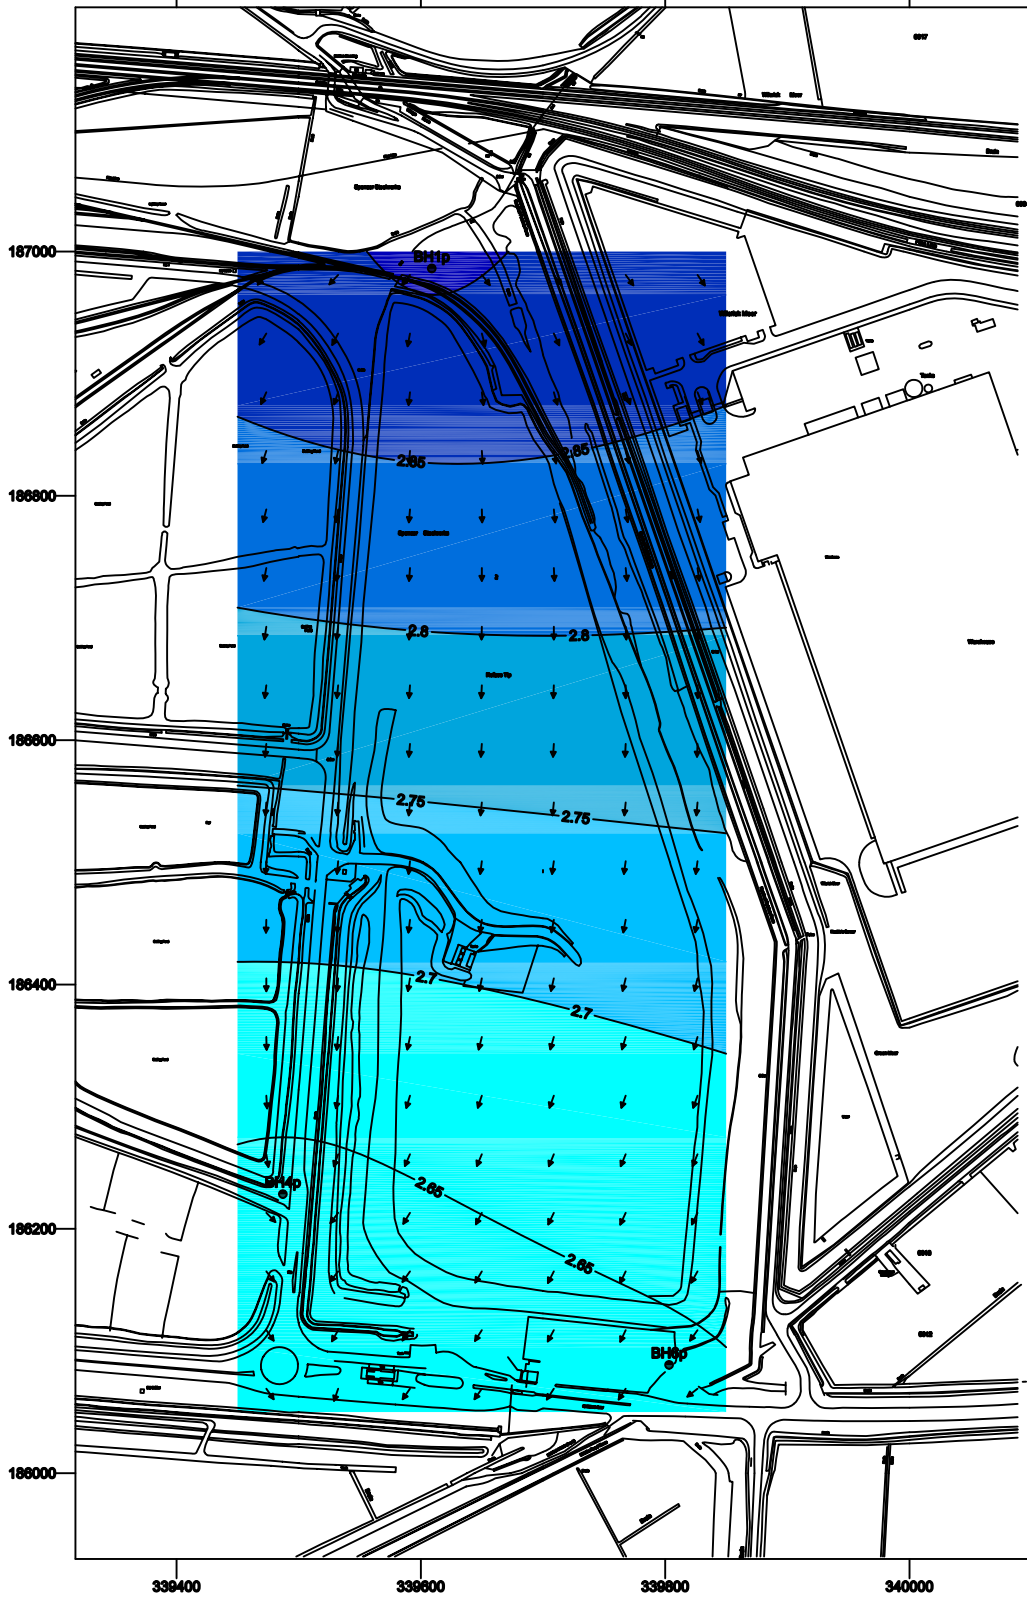


AQUIFER FLOW

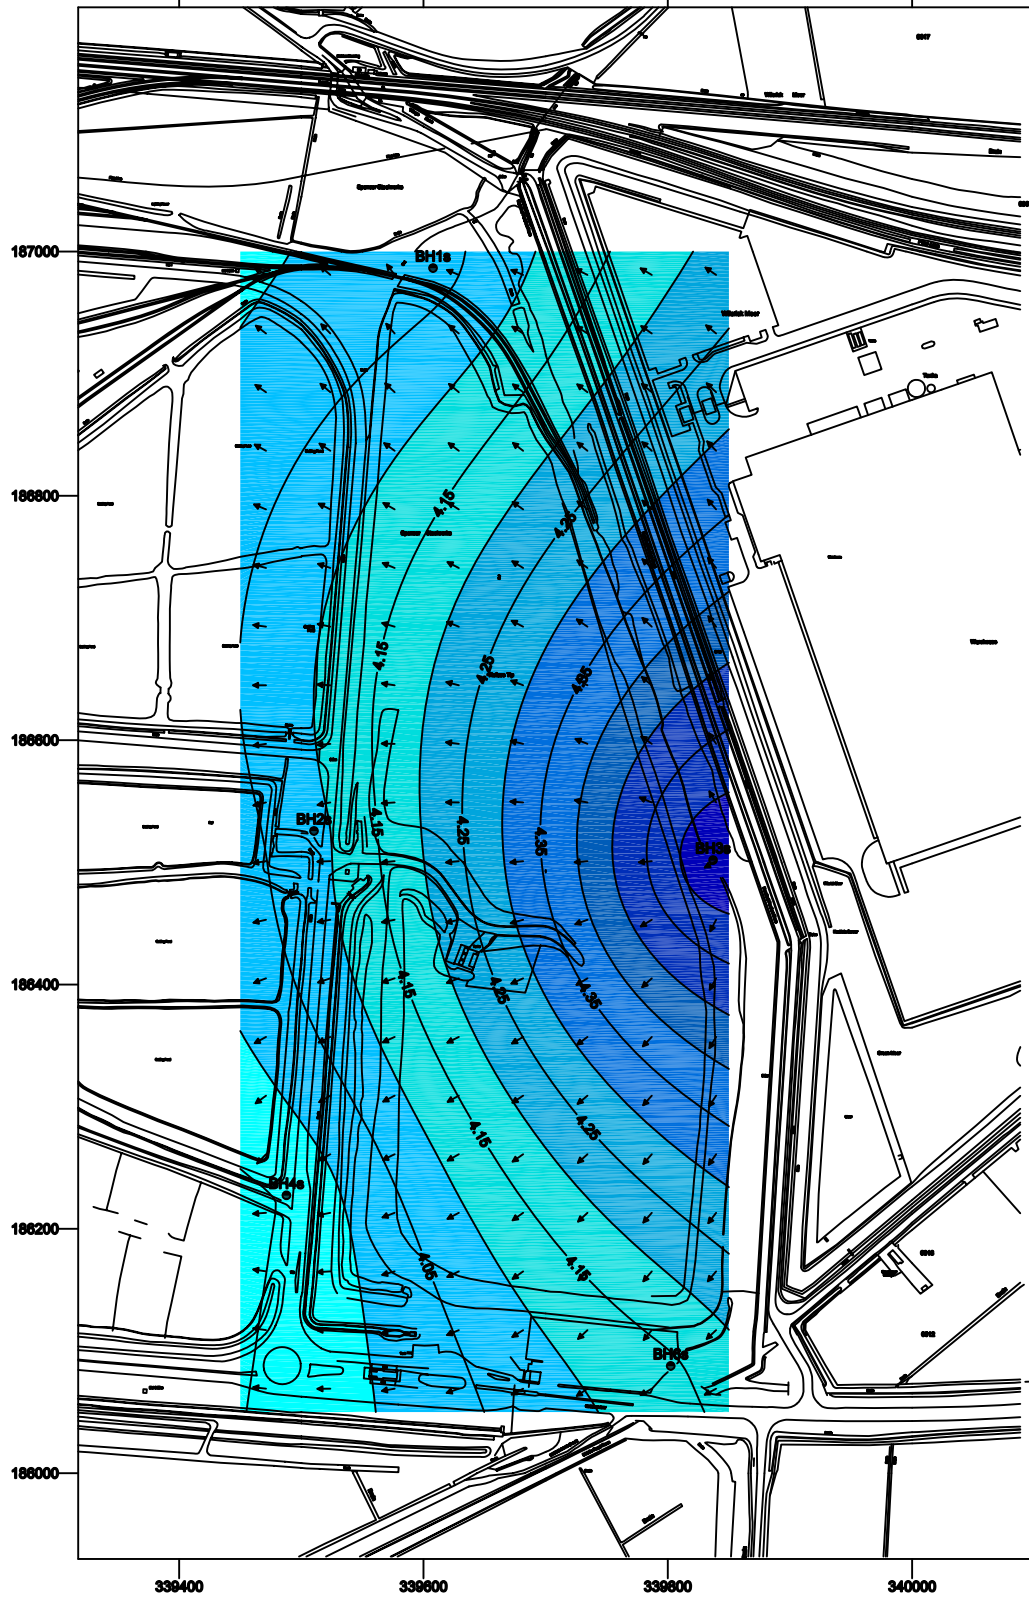

LEACHATE FLOW

Figure 9 Recent Groundwater Elevations (mAOD)

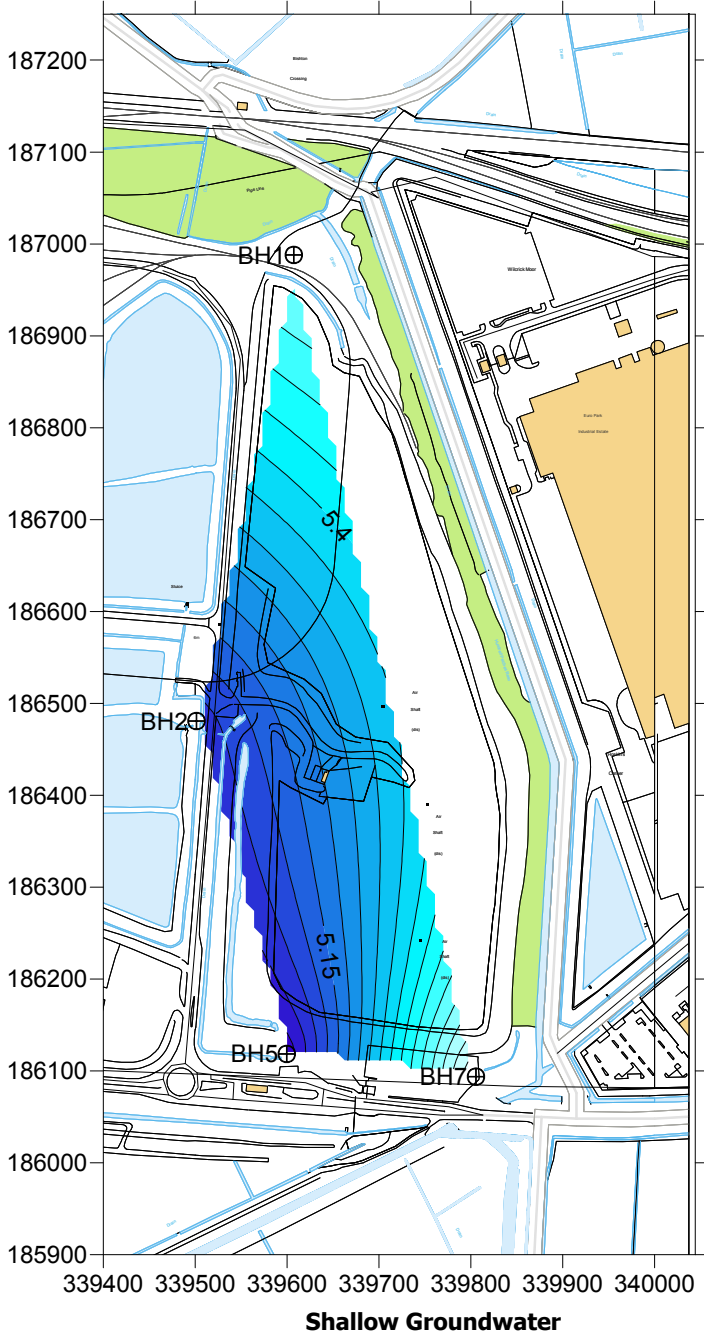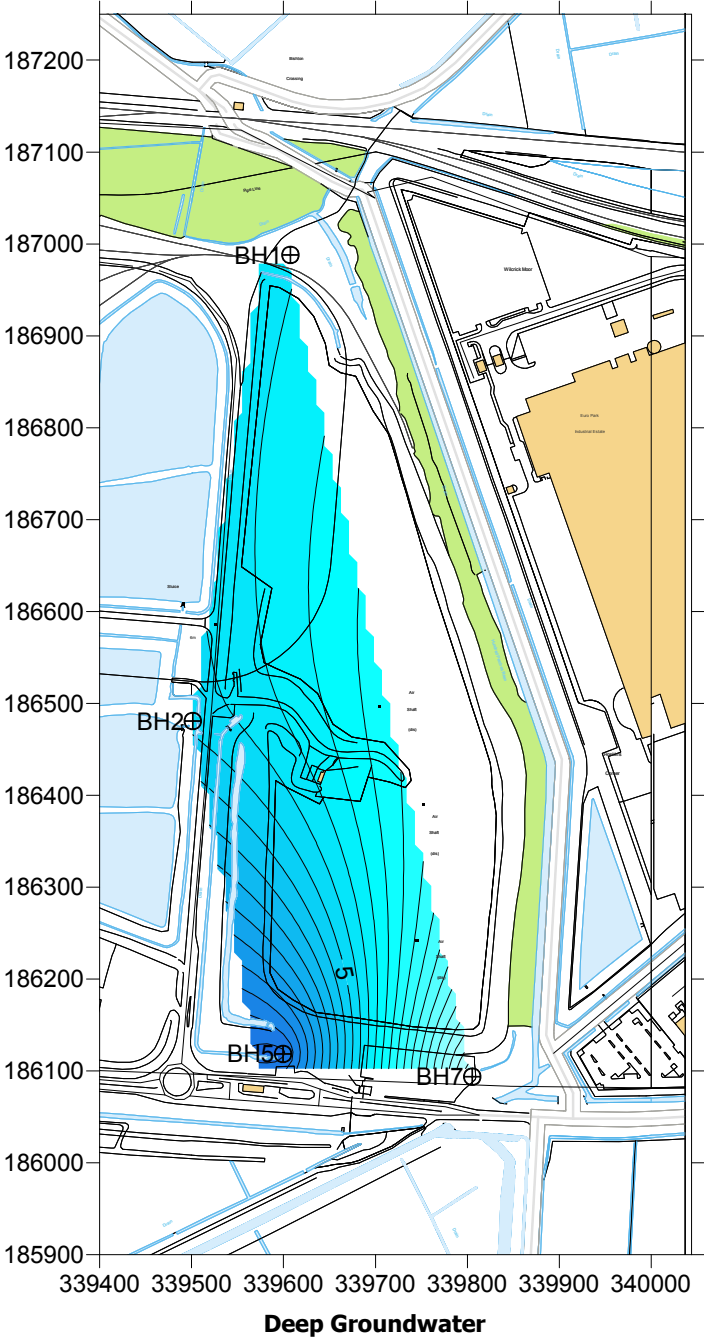


**EAST WASTE
MANAGEMENT SITE,
LLANWERN STEELWORKS**


PERMIT EAWML/30003




**2018 Annual Review of
Environmental
Monitoring**

**Appendix 1
Groundwater Levels
and Chemistry**


Report Number 1785r1v1d0219

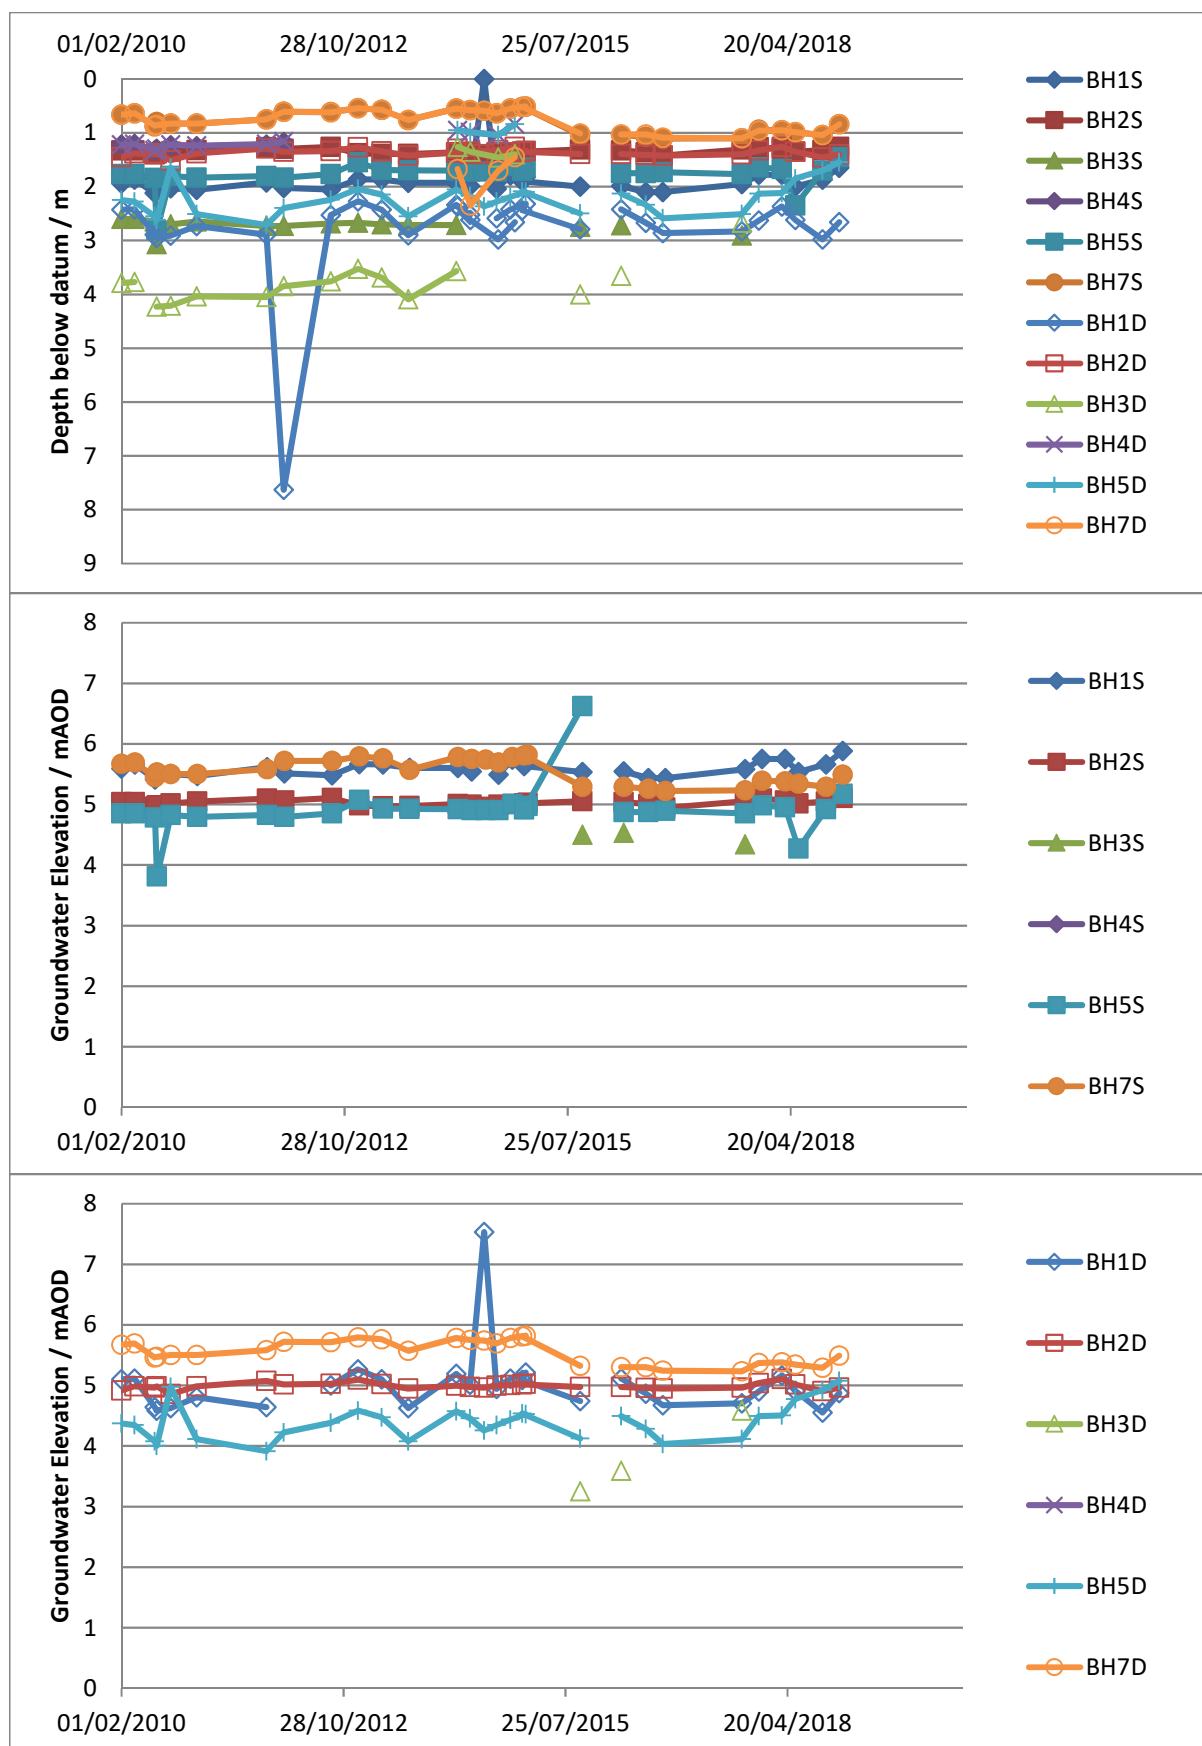

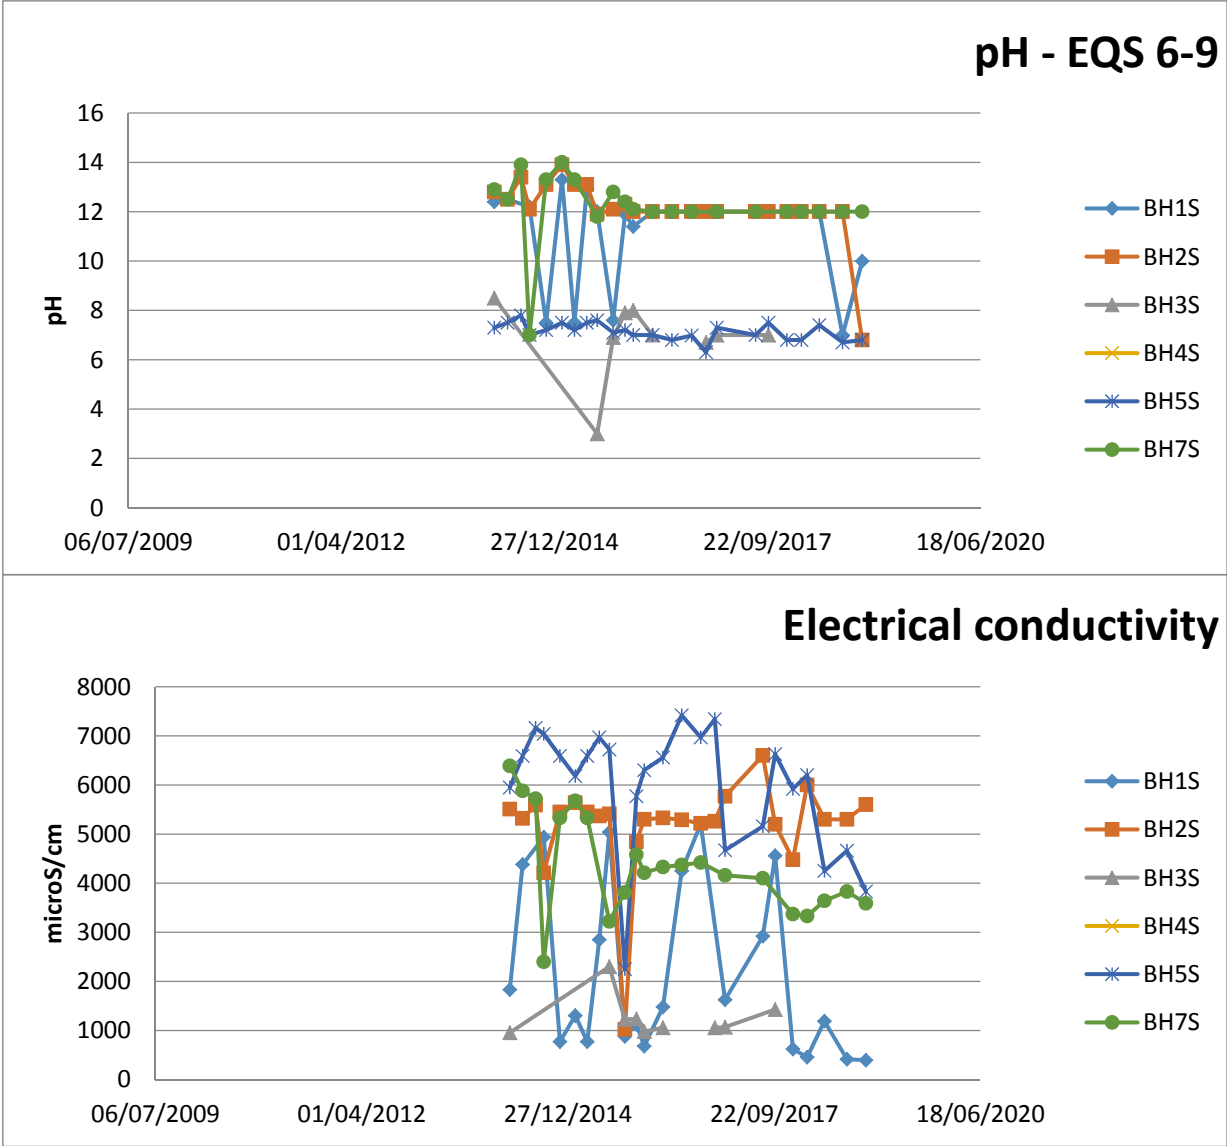


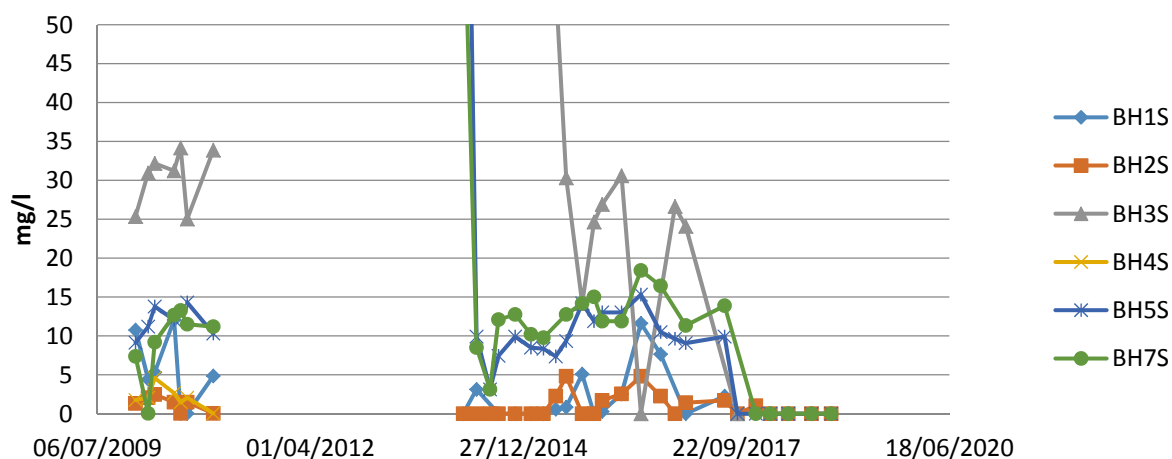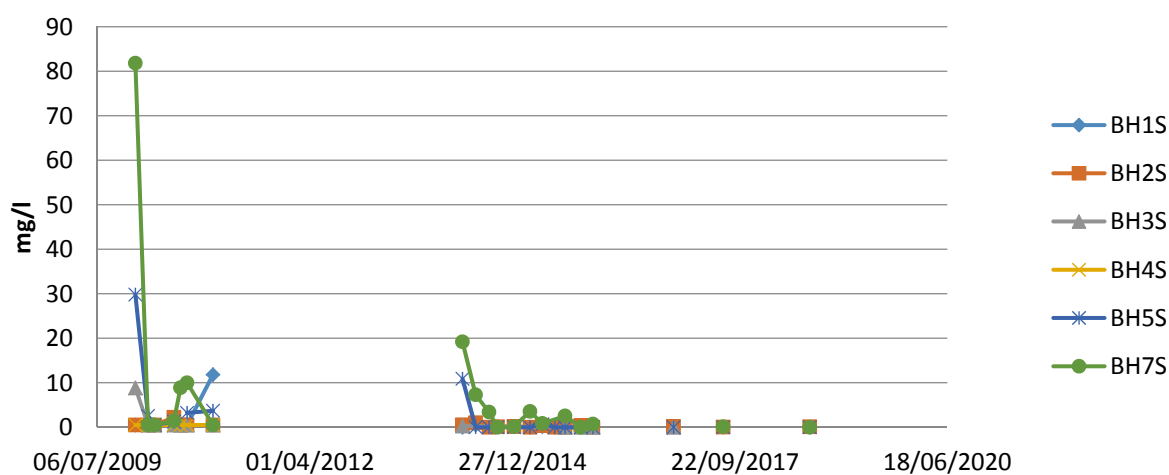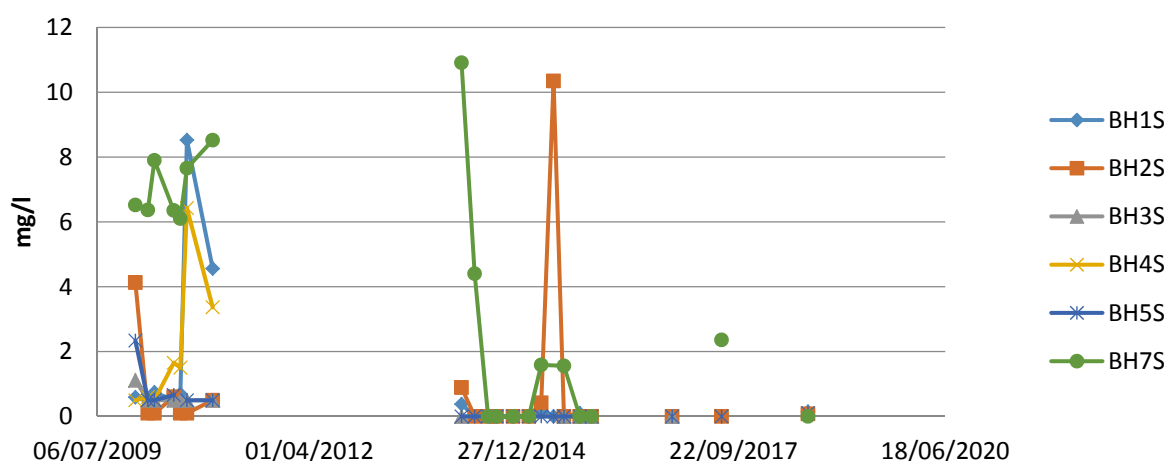Ammonia - EQS 0.3 mg/l**Nitrate****Nitrite**


Calcium



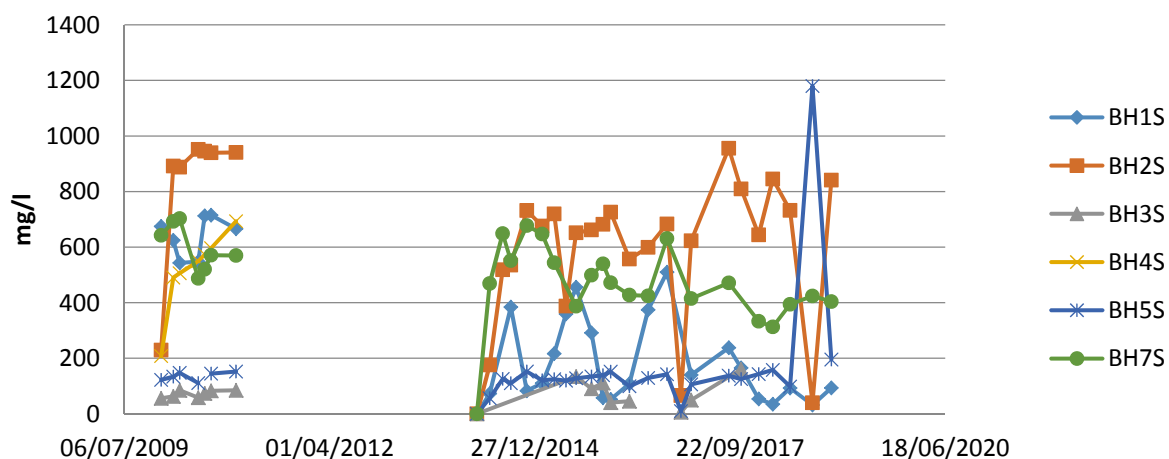



Magnesium

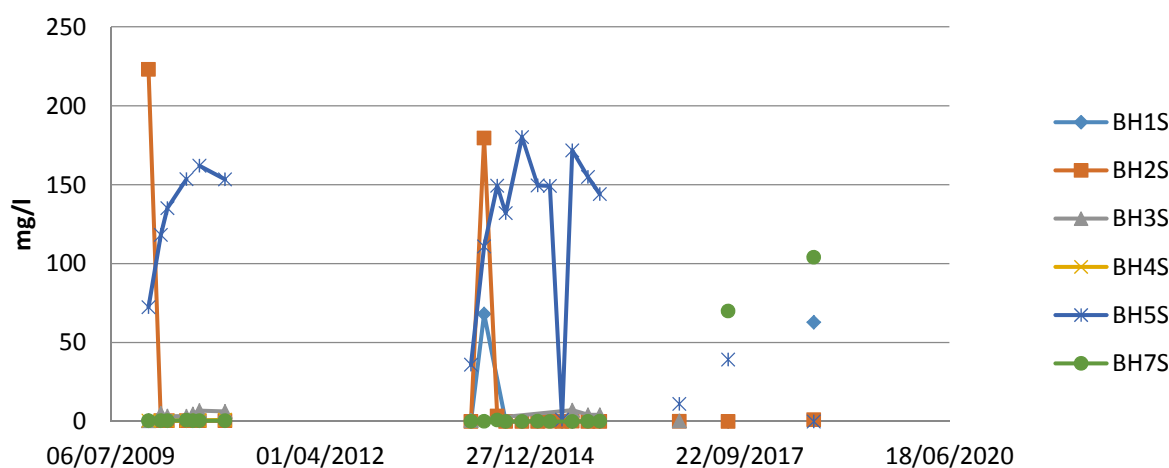





Alkalinity



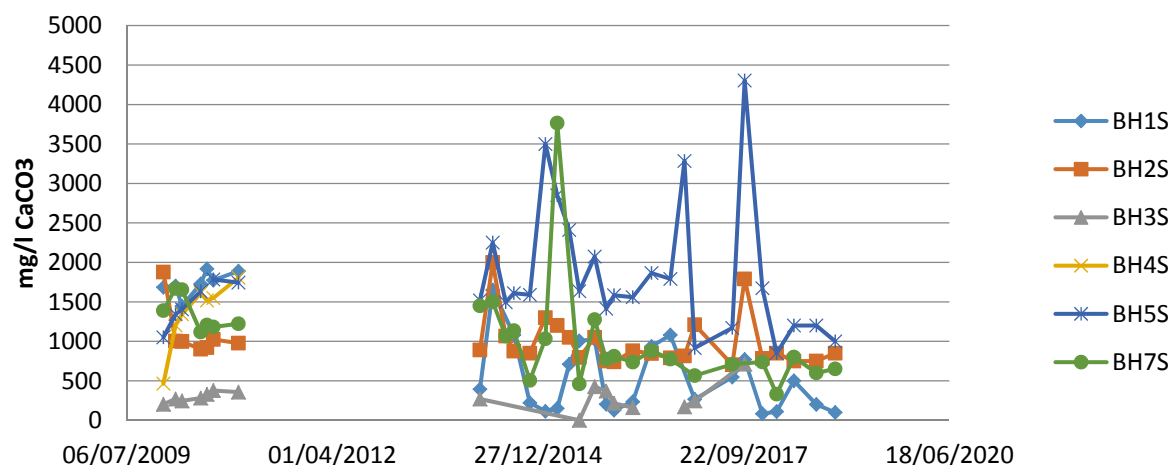


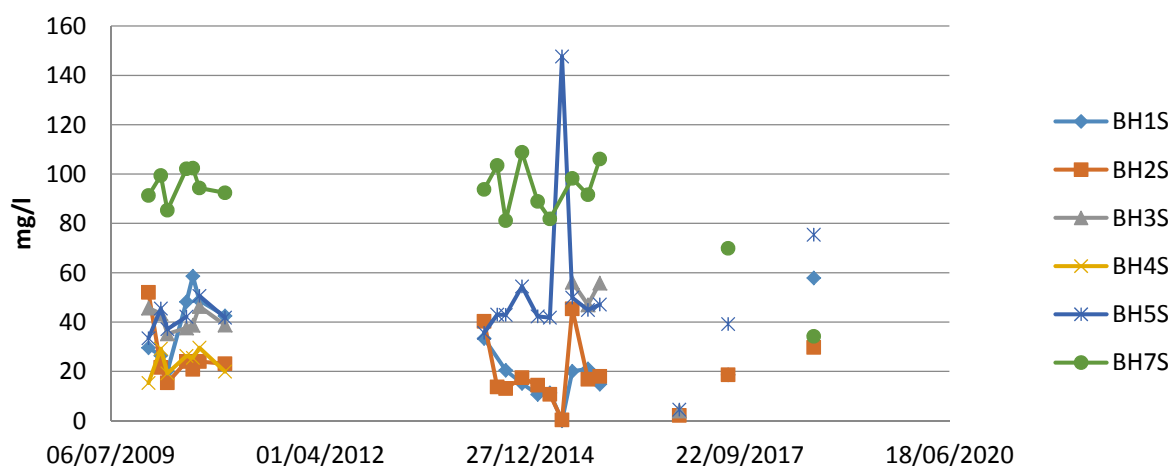
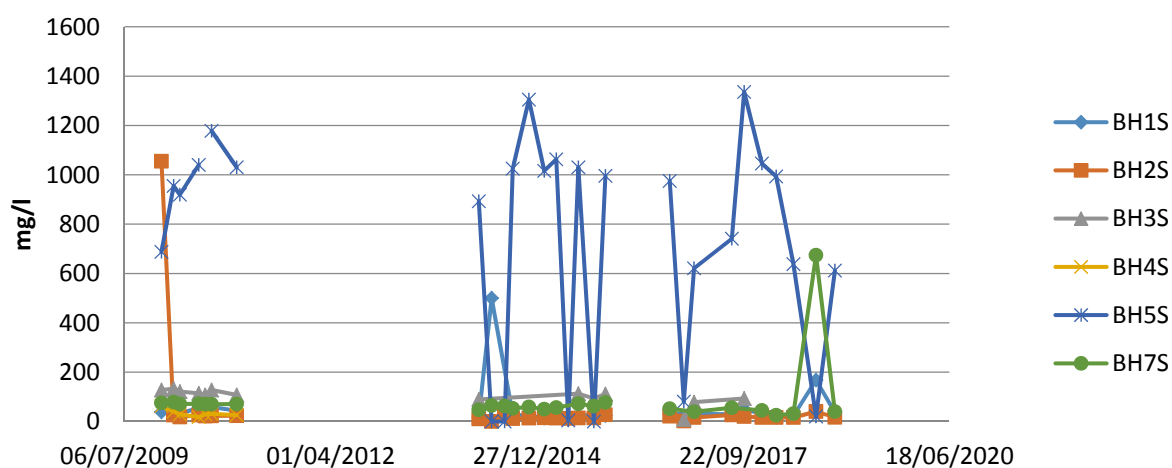
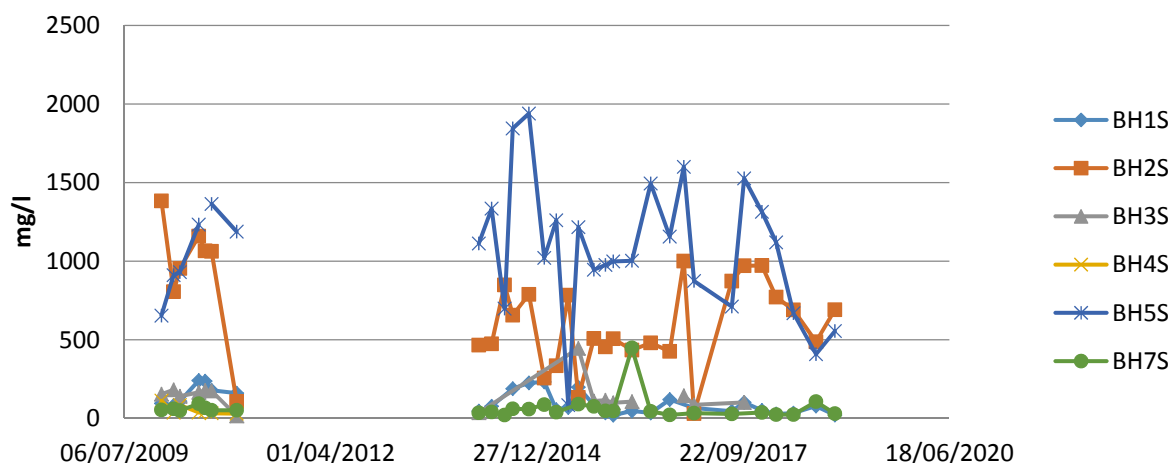
Potassium**Sodium****Chloride - EQS 250 mg/l**



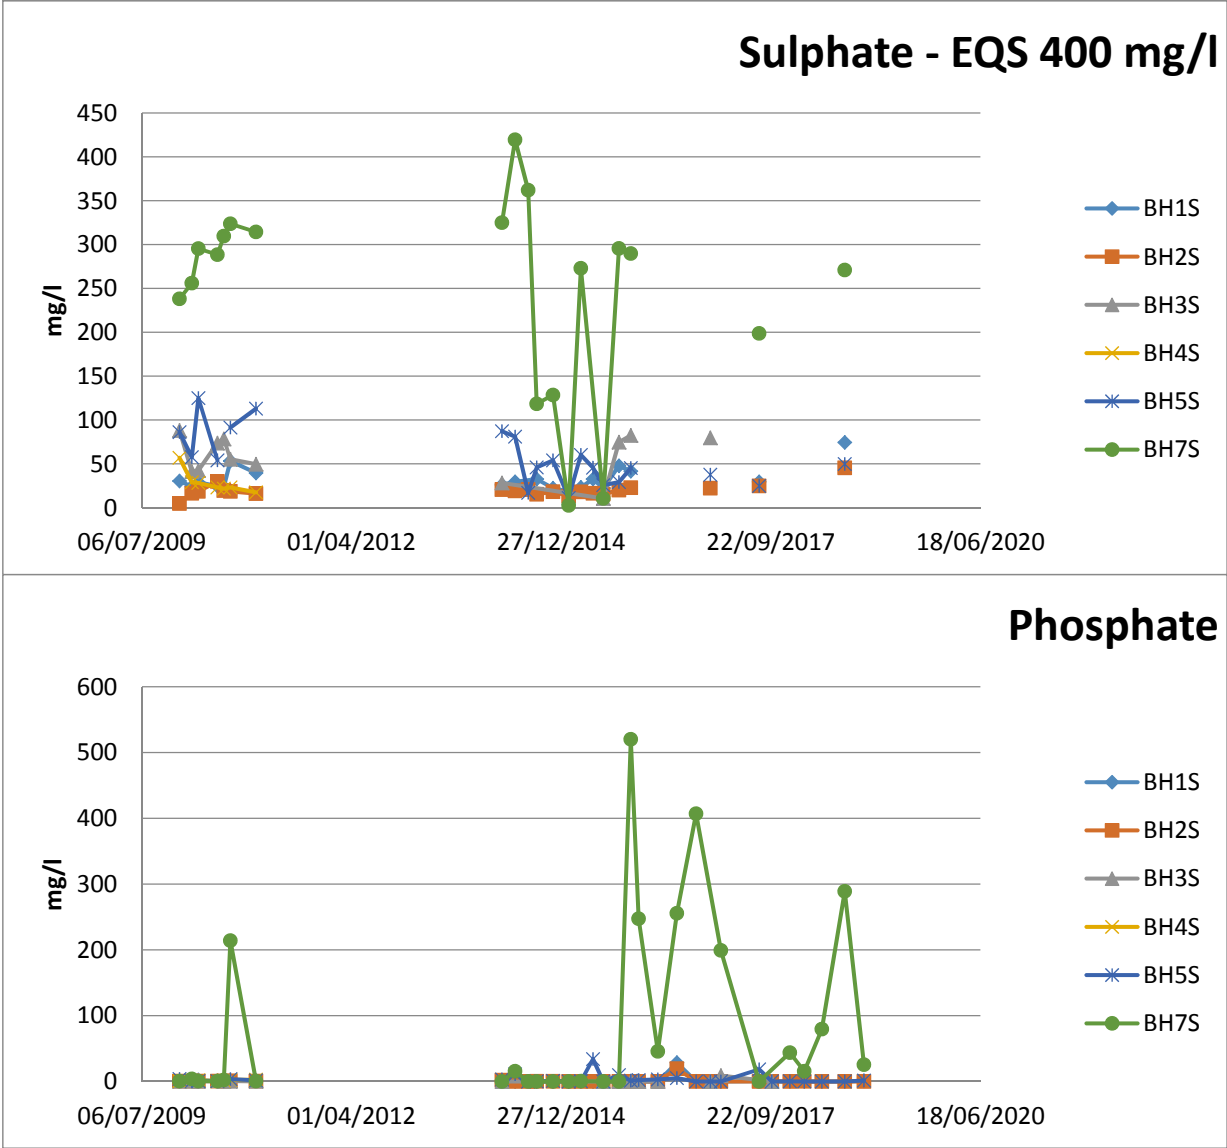


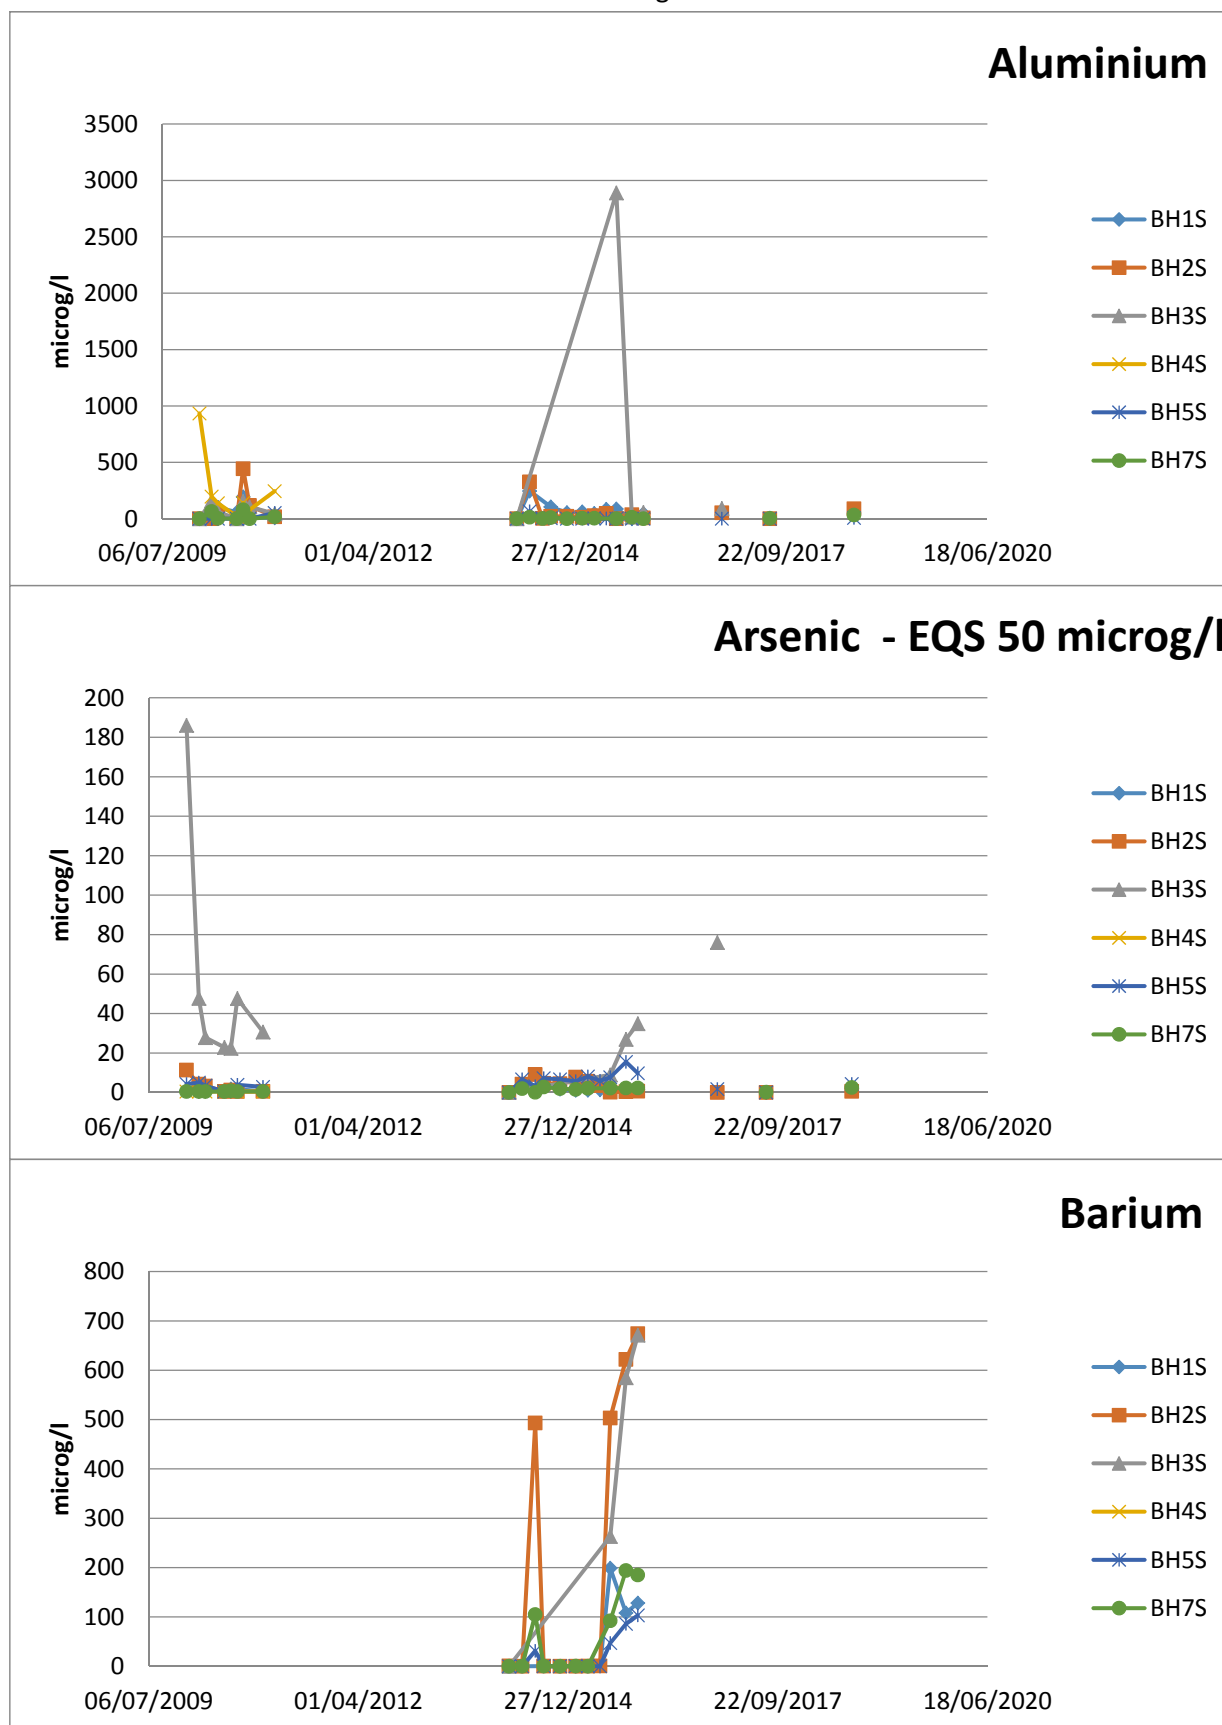


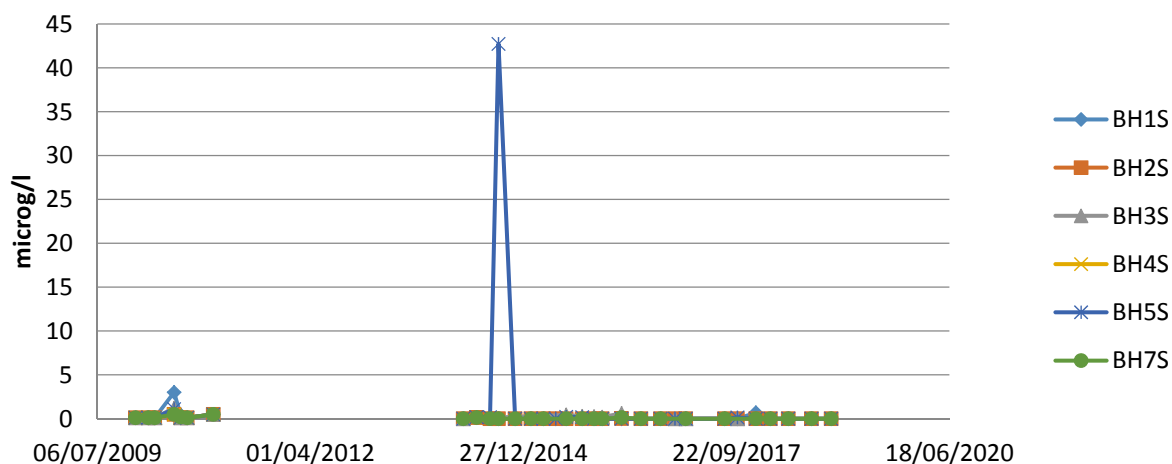
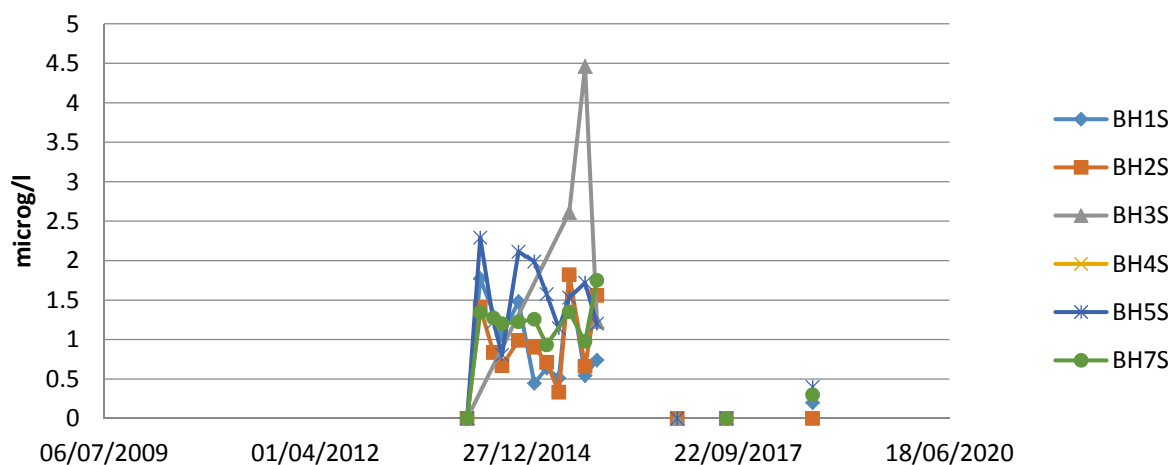
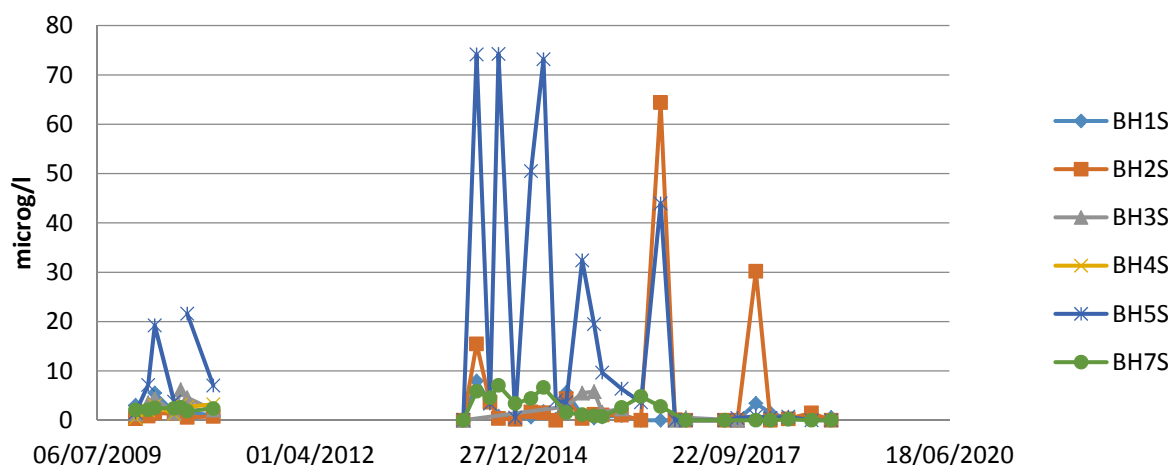
Cadmium - EQS <0.25 microg/l**Cobalt - EQS 3 microg/l****Chromium - EQS 4.7 microg/l**

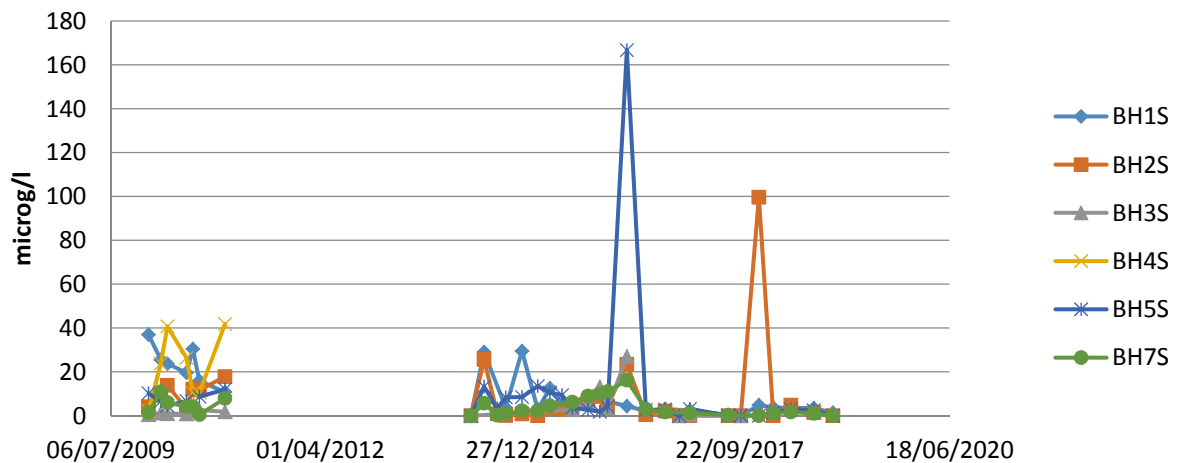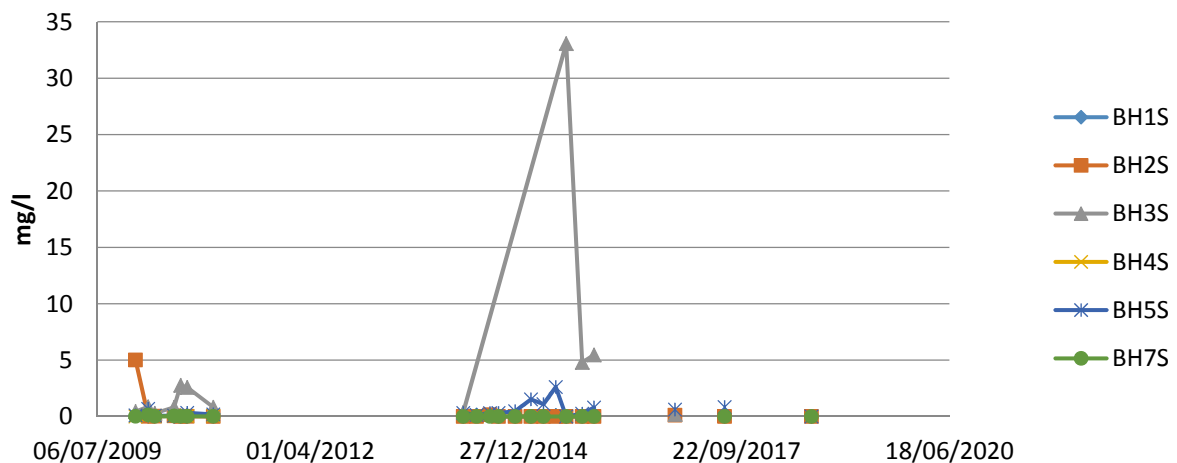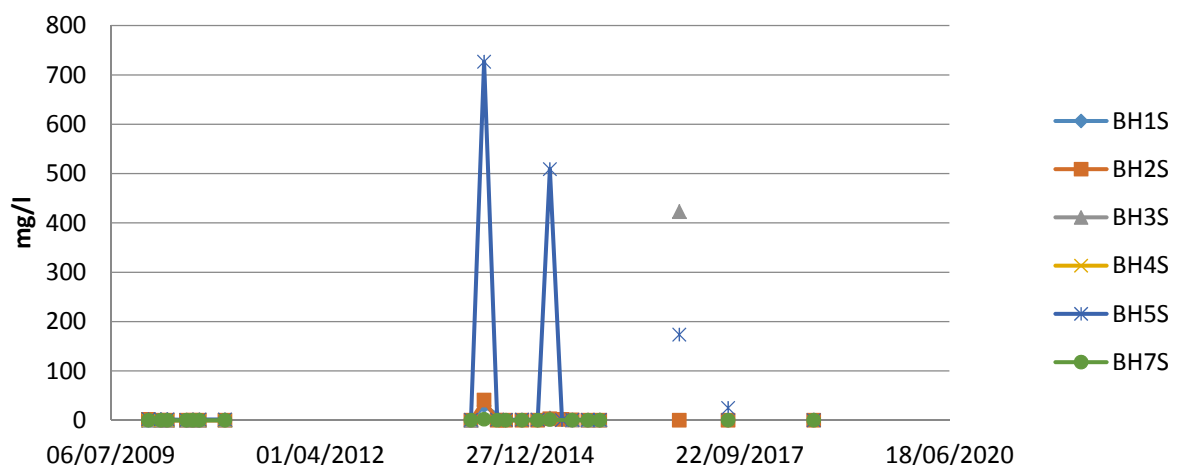
Copper - EQS 1microg/l (bio)**Iron - EQS 1 mg/l****Manganese - EQS 0.1 mg/l (bio)**

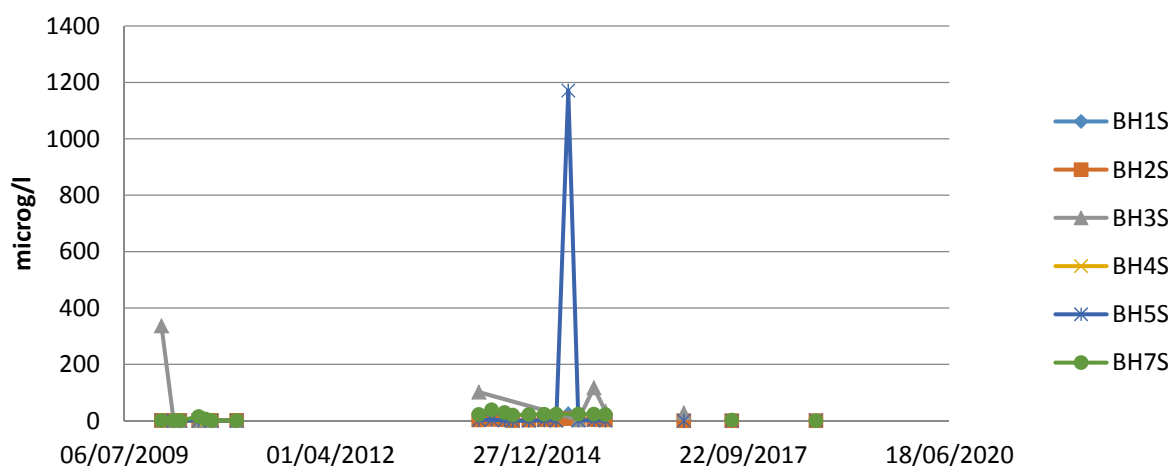
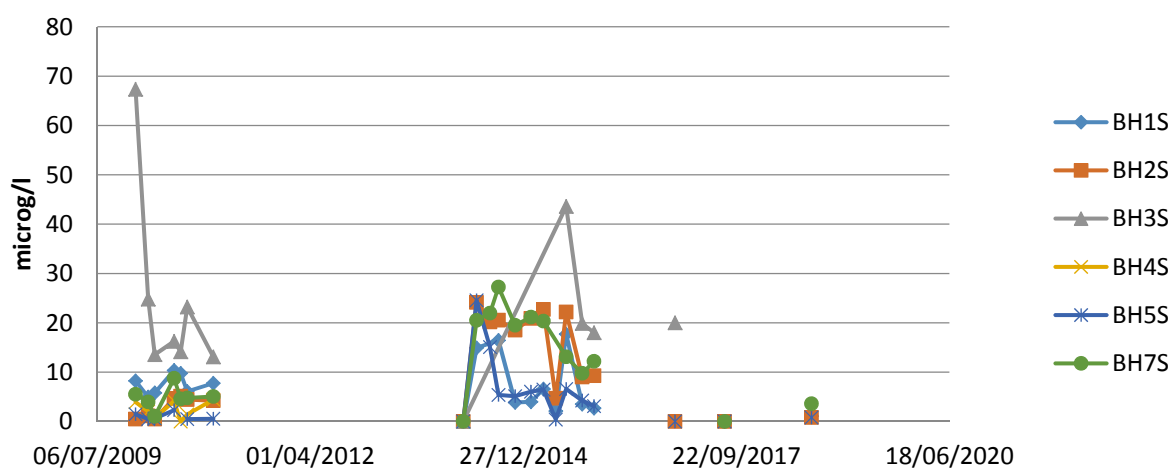
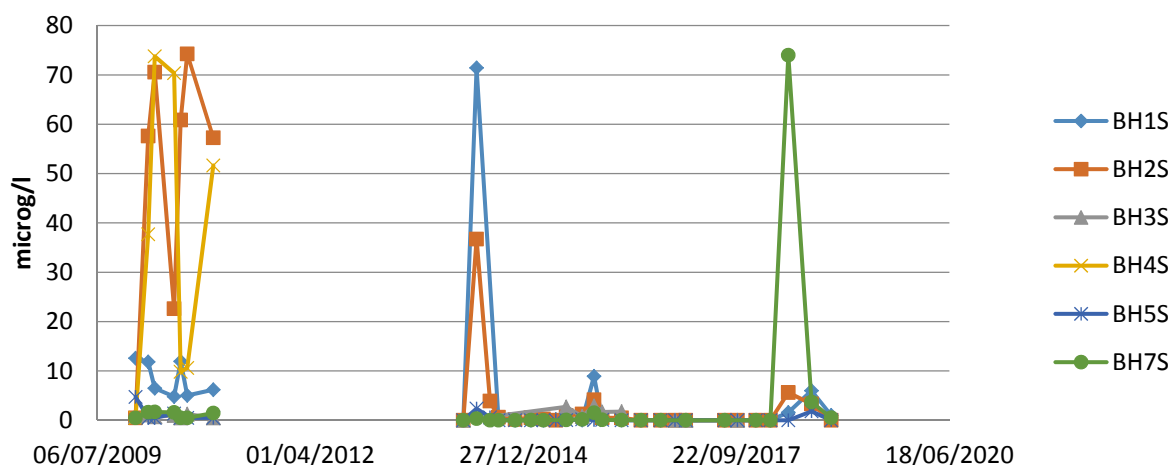
Molybdenum**Nickel - EQS 4 microg/l (bio)****Lead - EQS 1.2 microg/l (bio)**

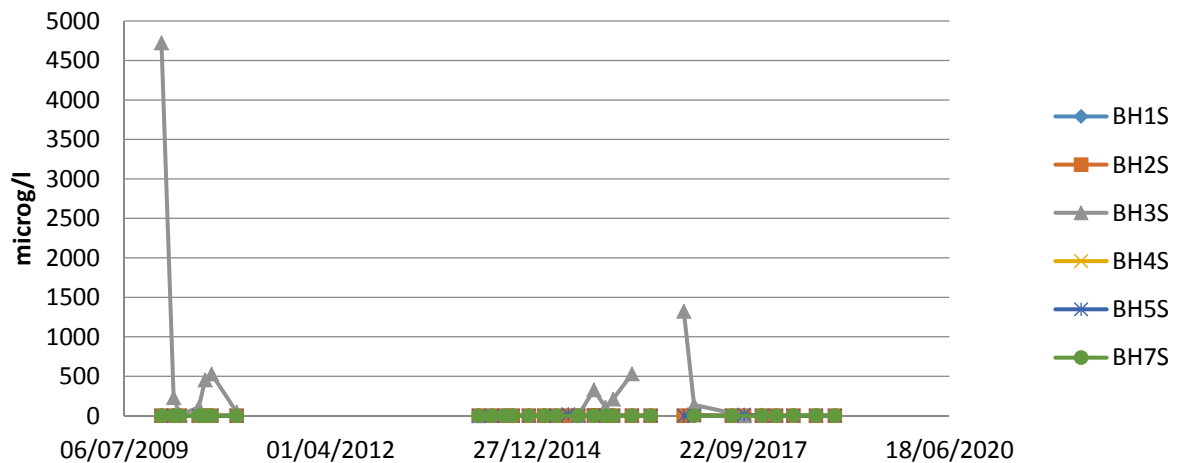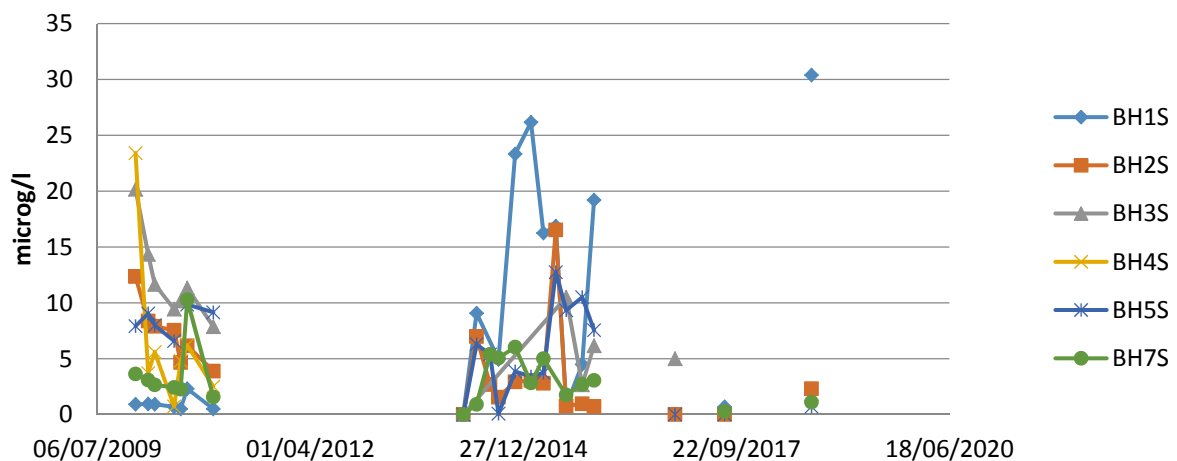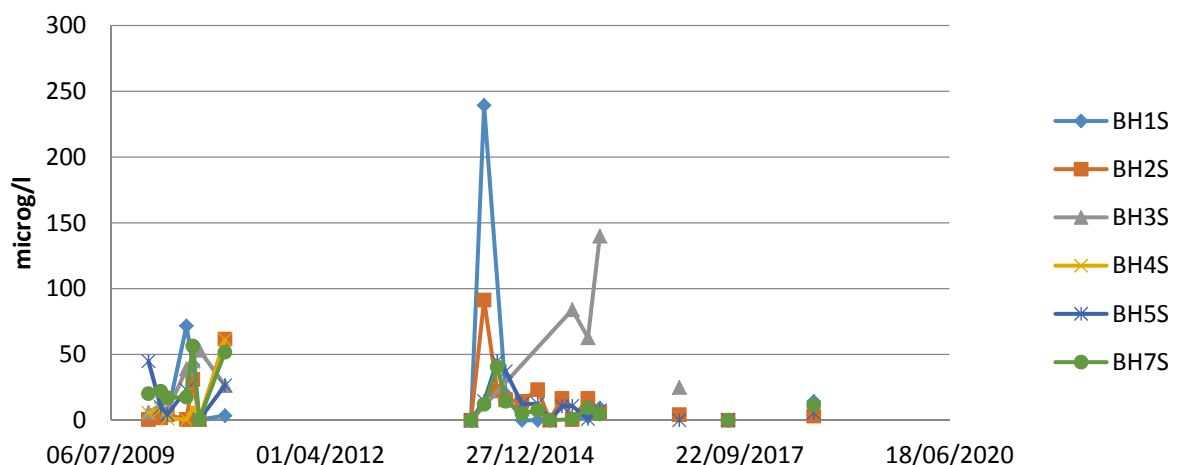
Antimony**Vanadium - EQS 20 microg/l****Zinc - EQS 10.9 microg/l (bio+background)**

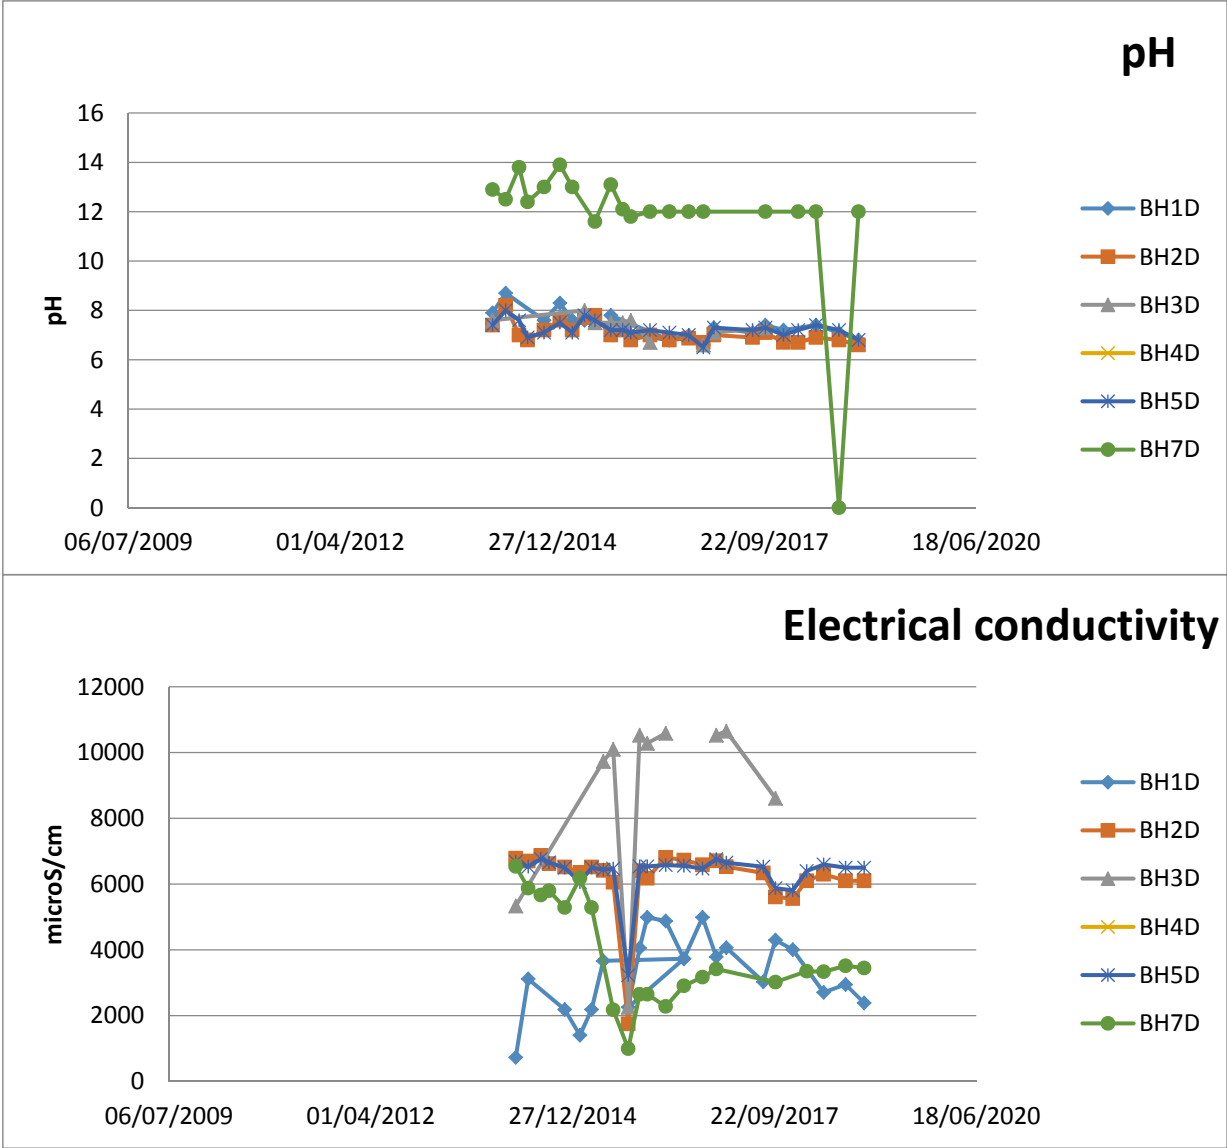


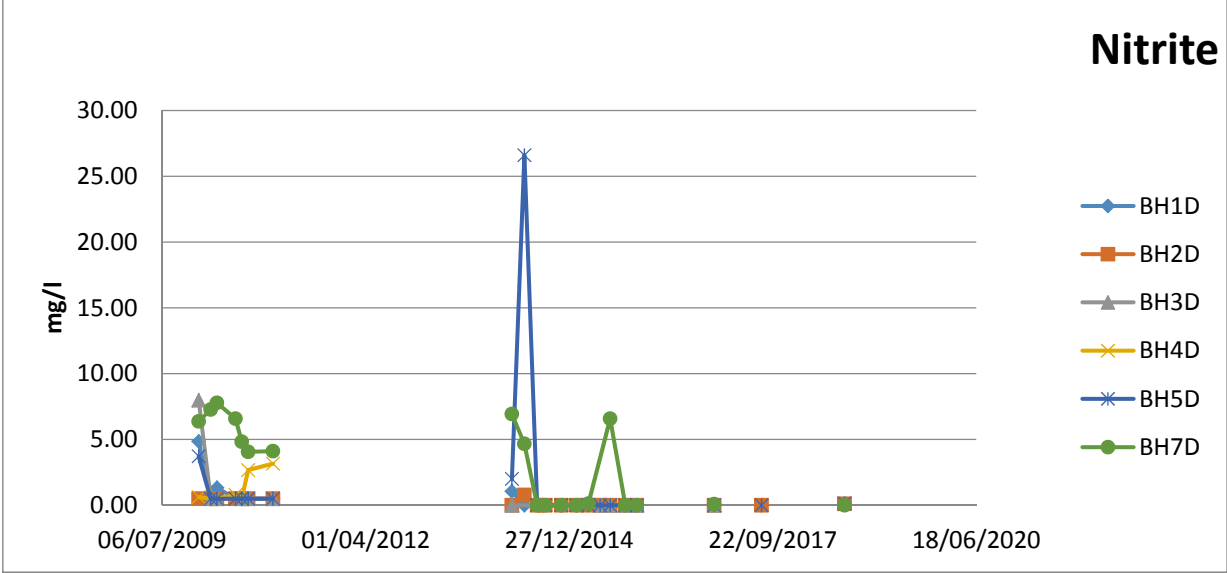
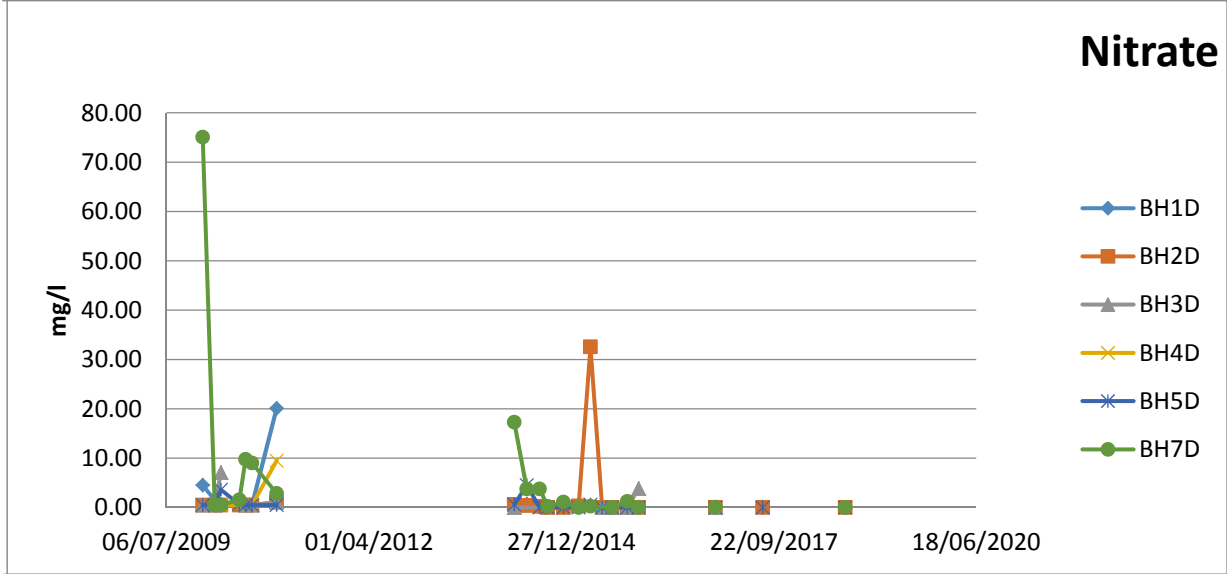
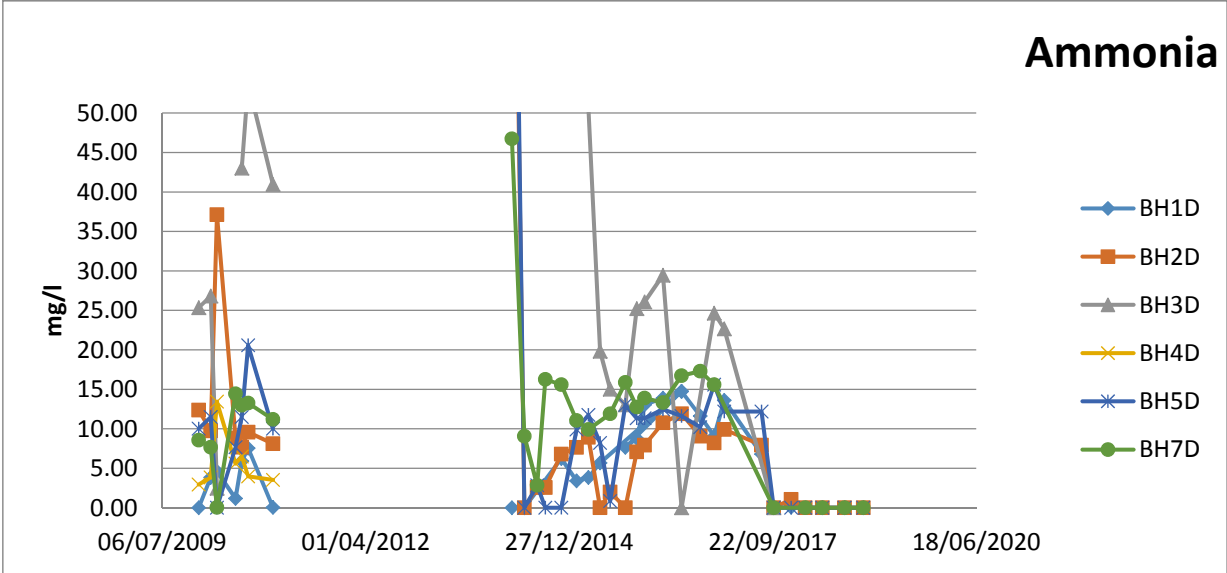


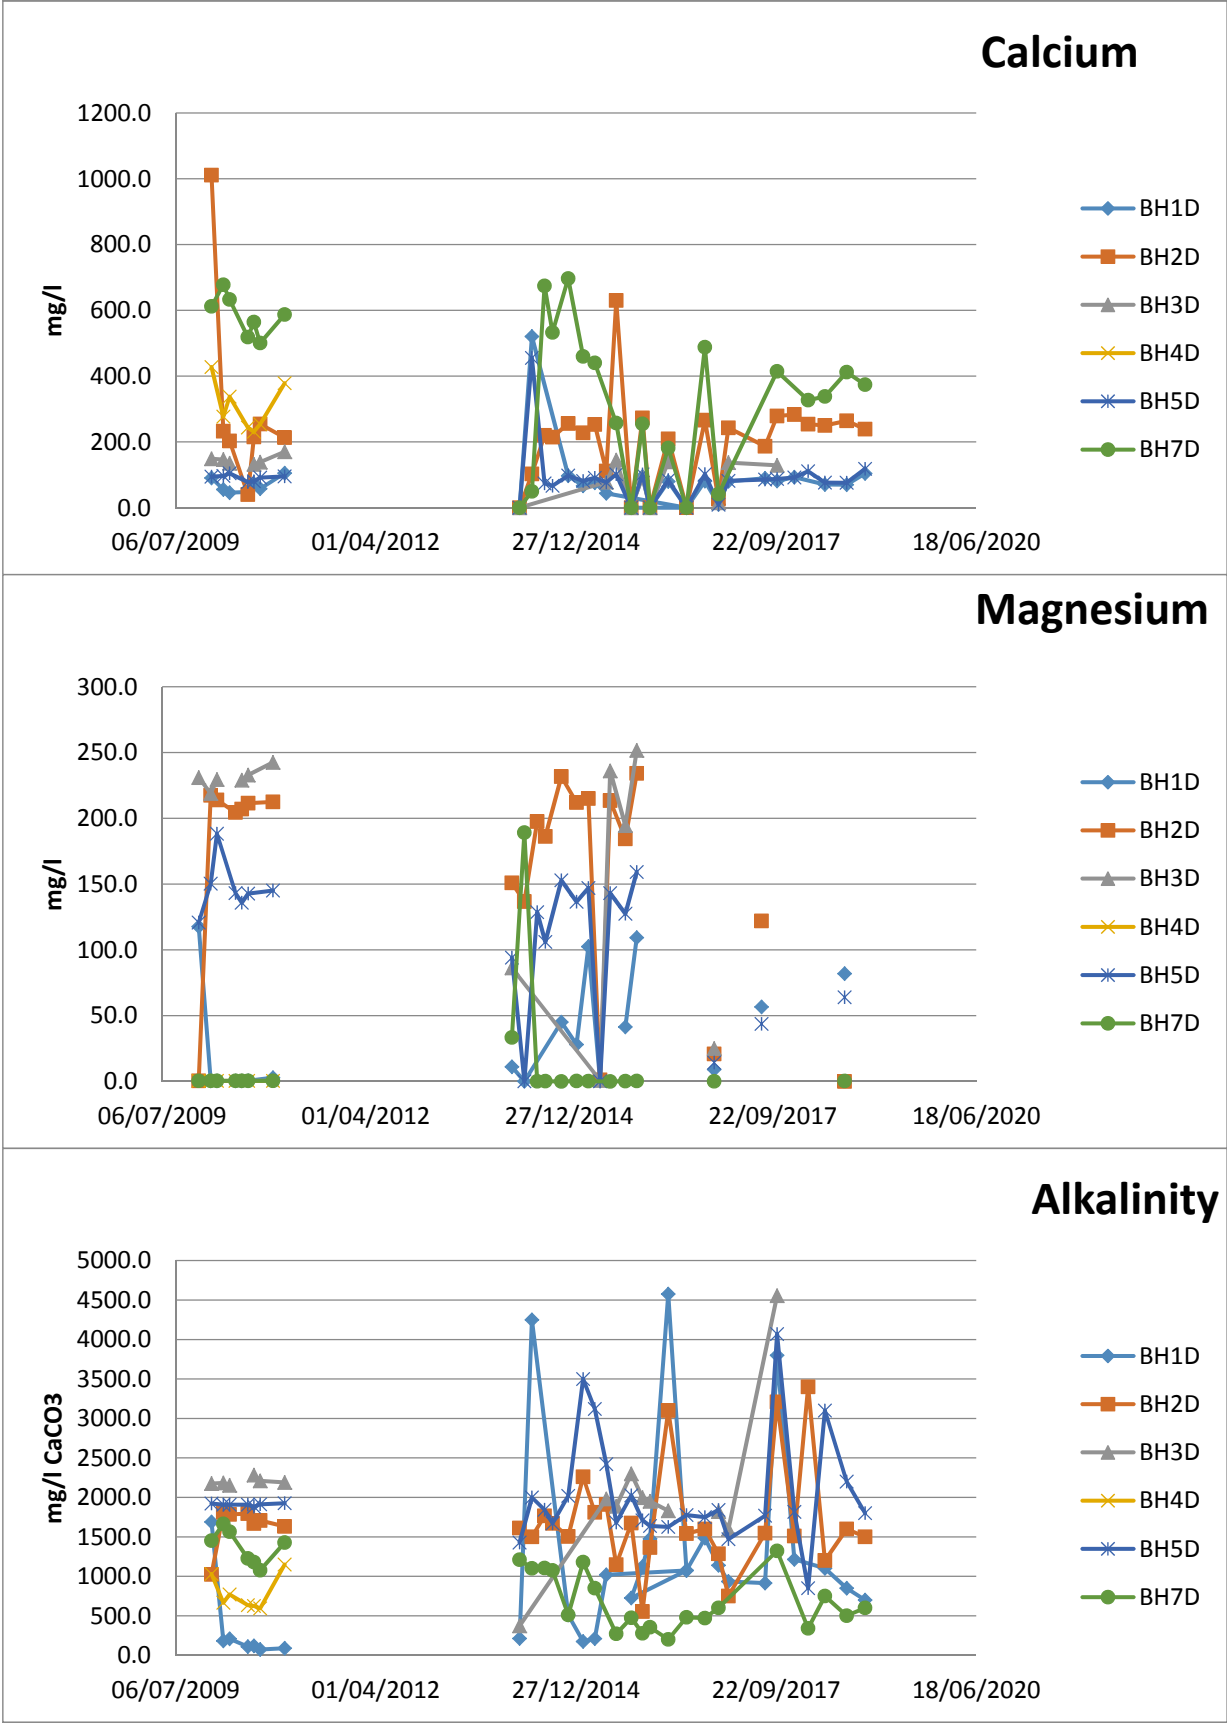


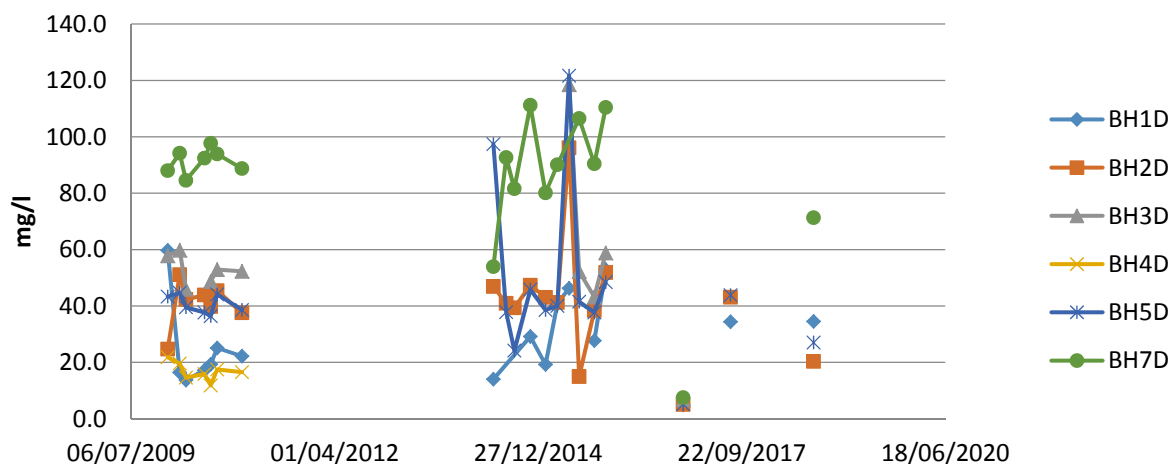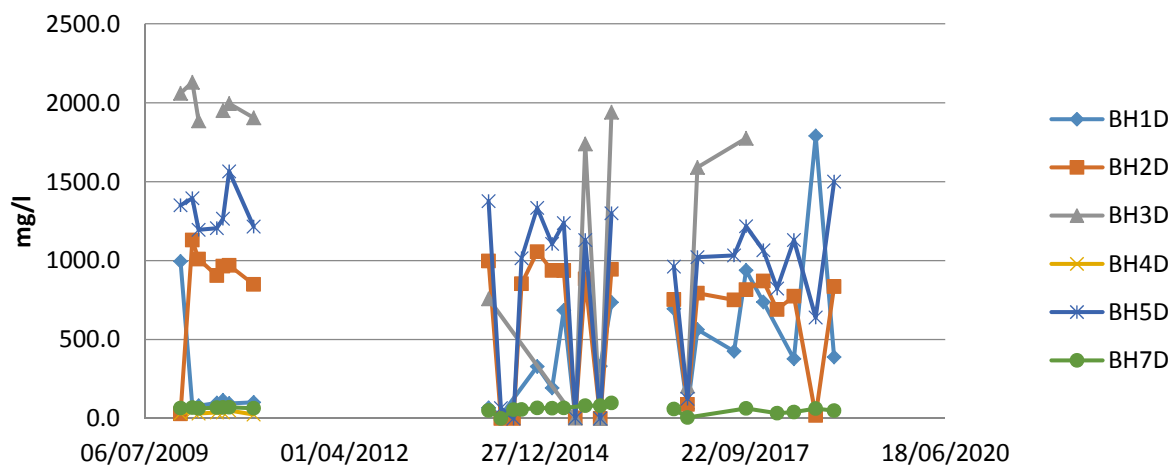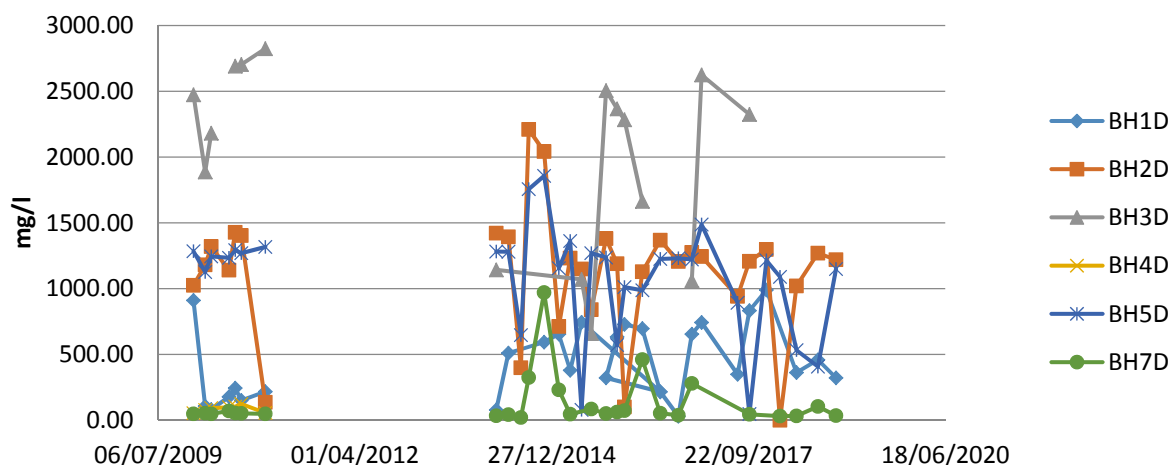
Potassium**Sodium****Chloride**



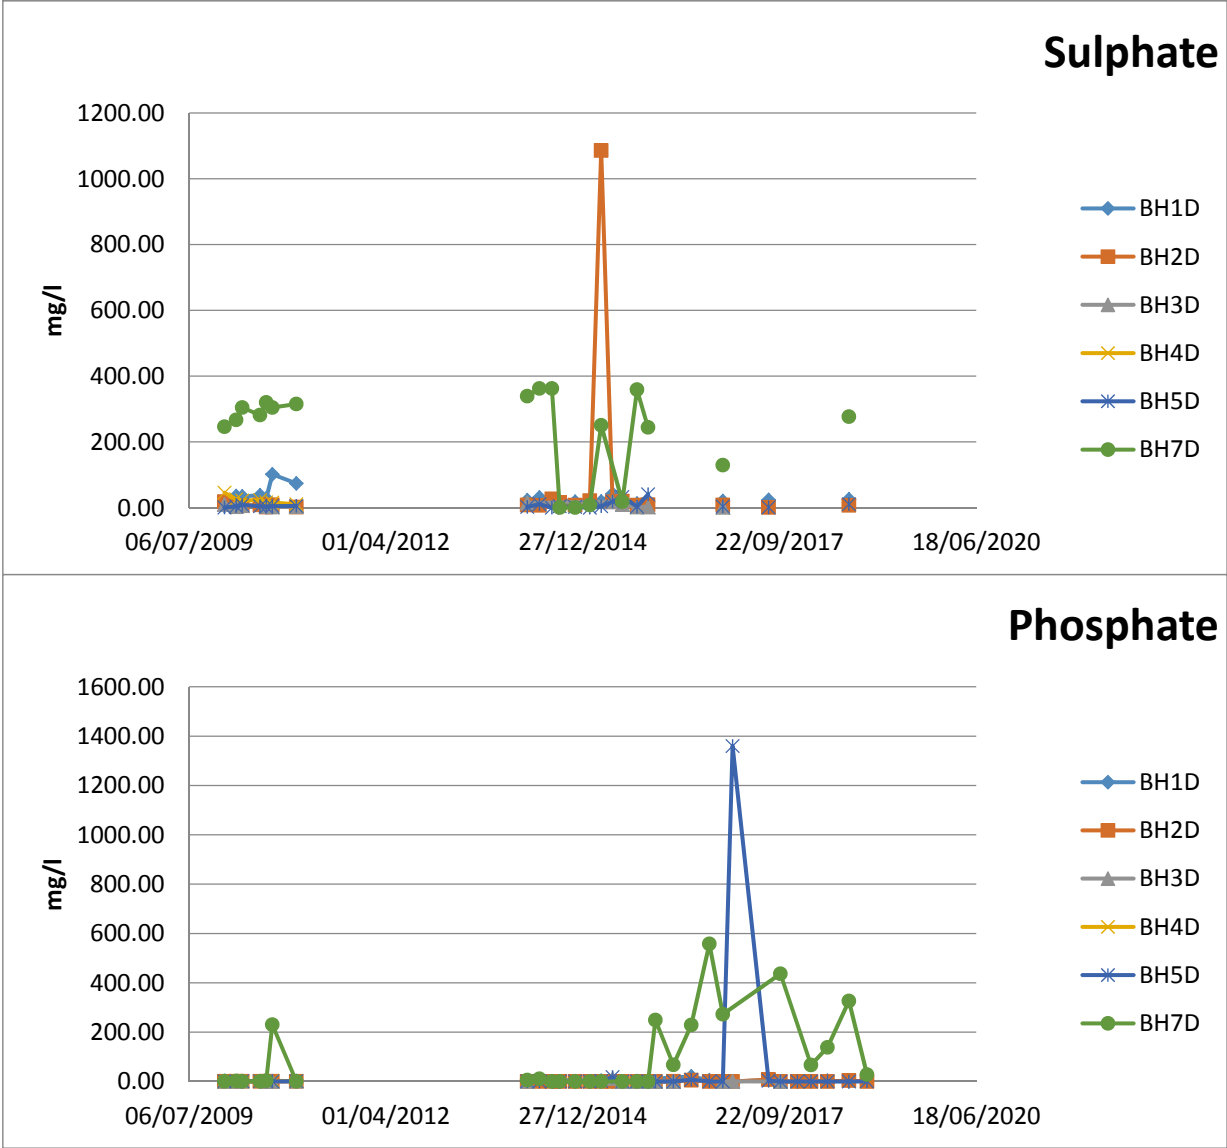


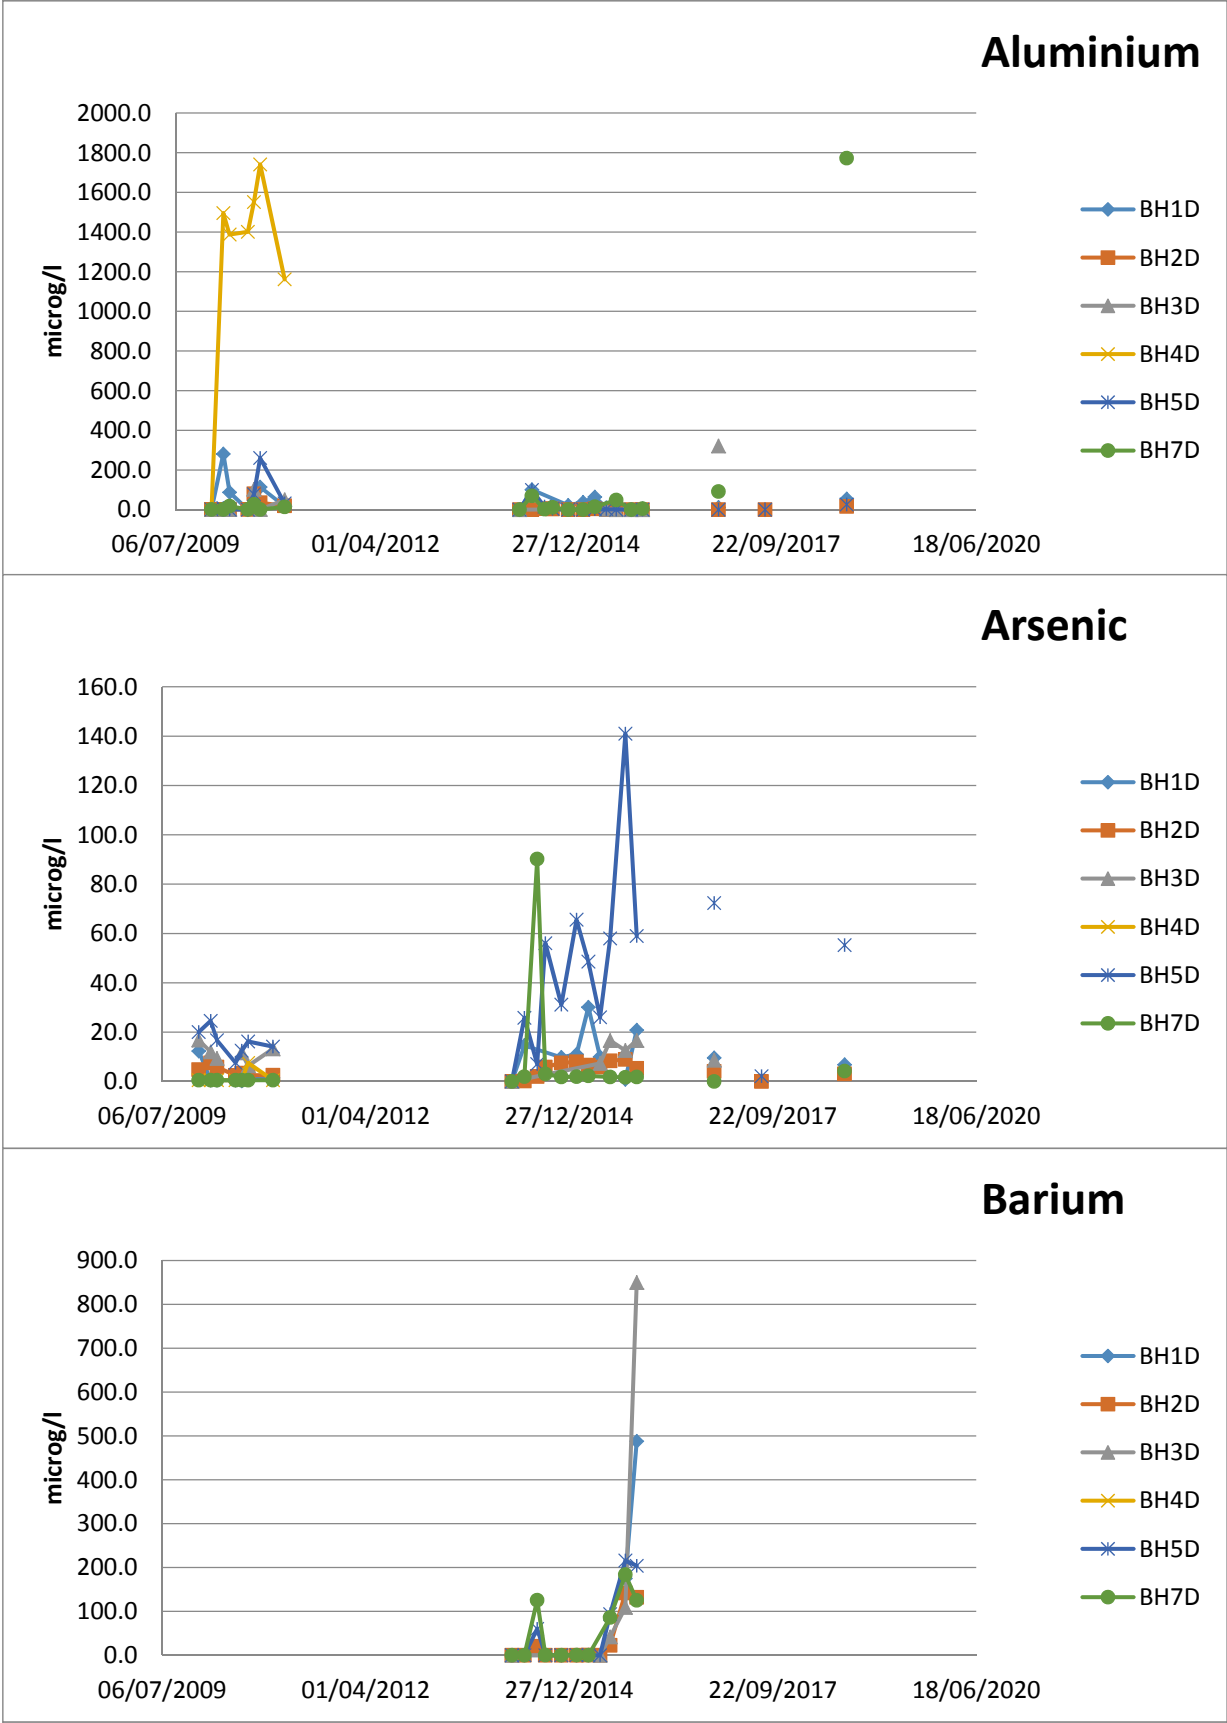

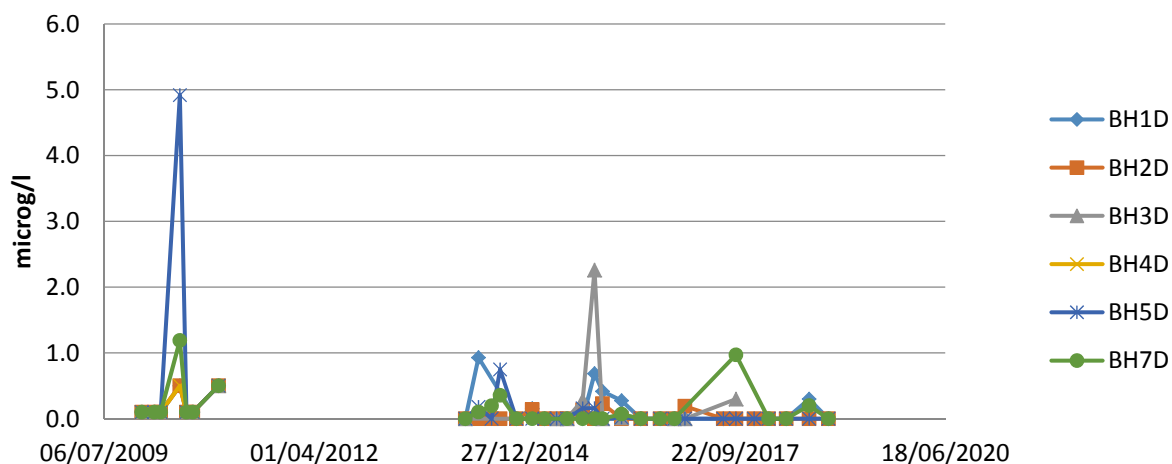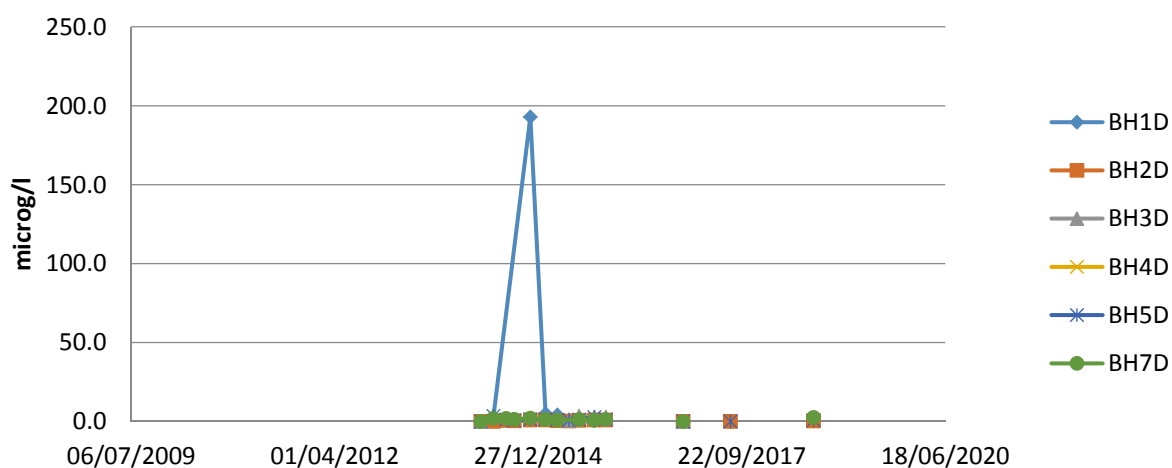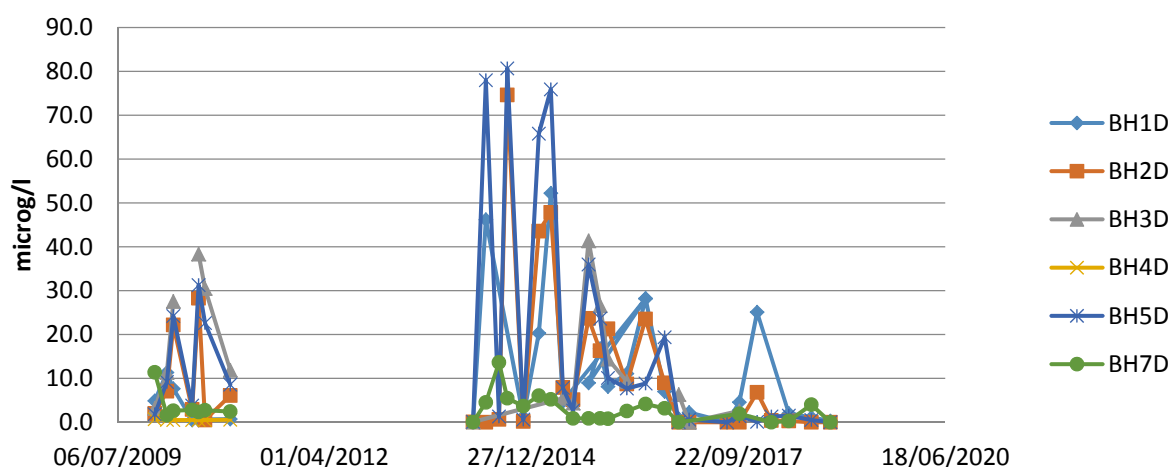Cadmium**Cobalt****Chromium**

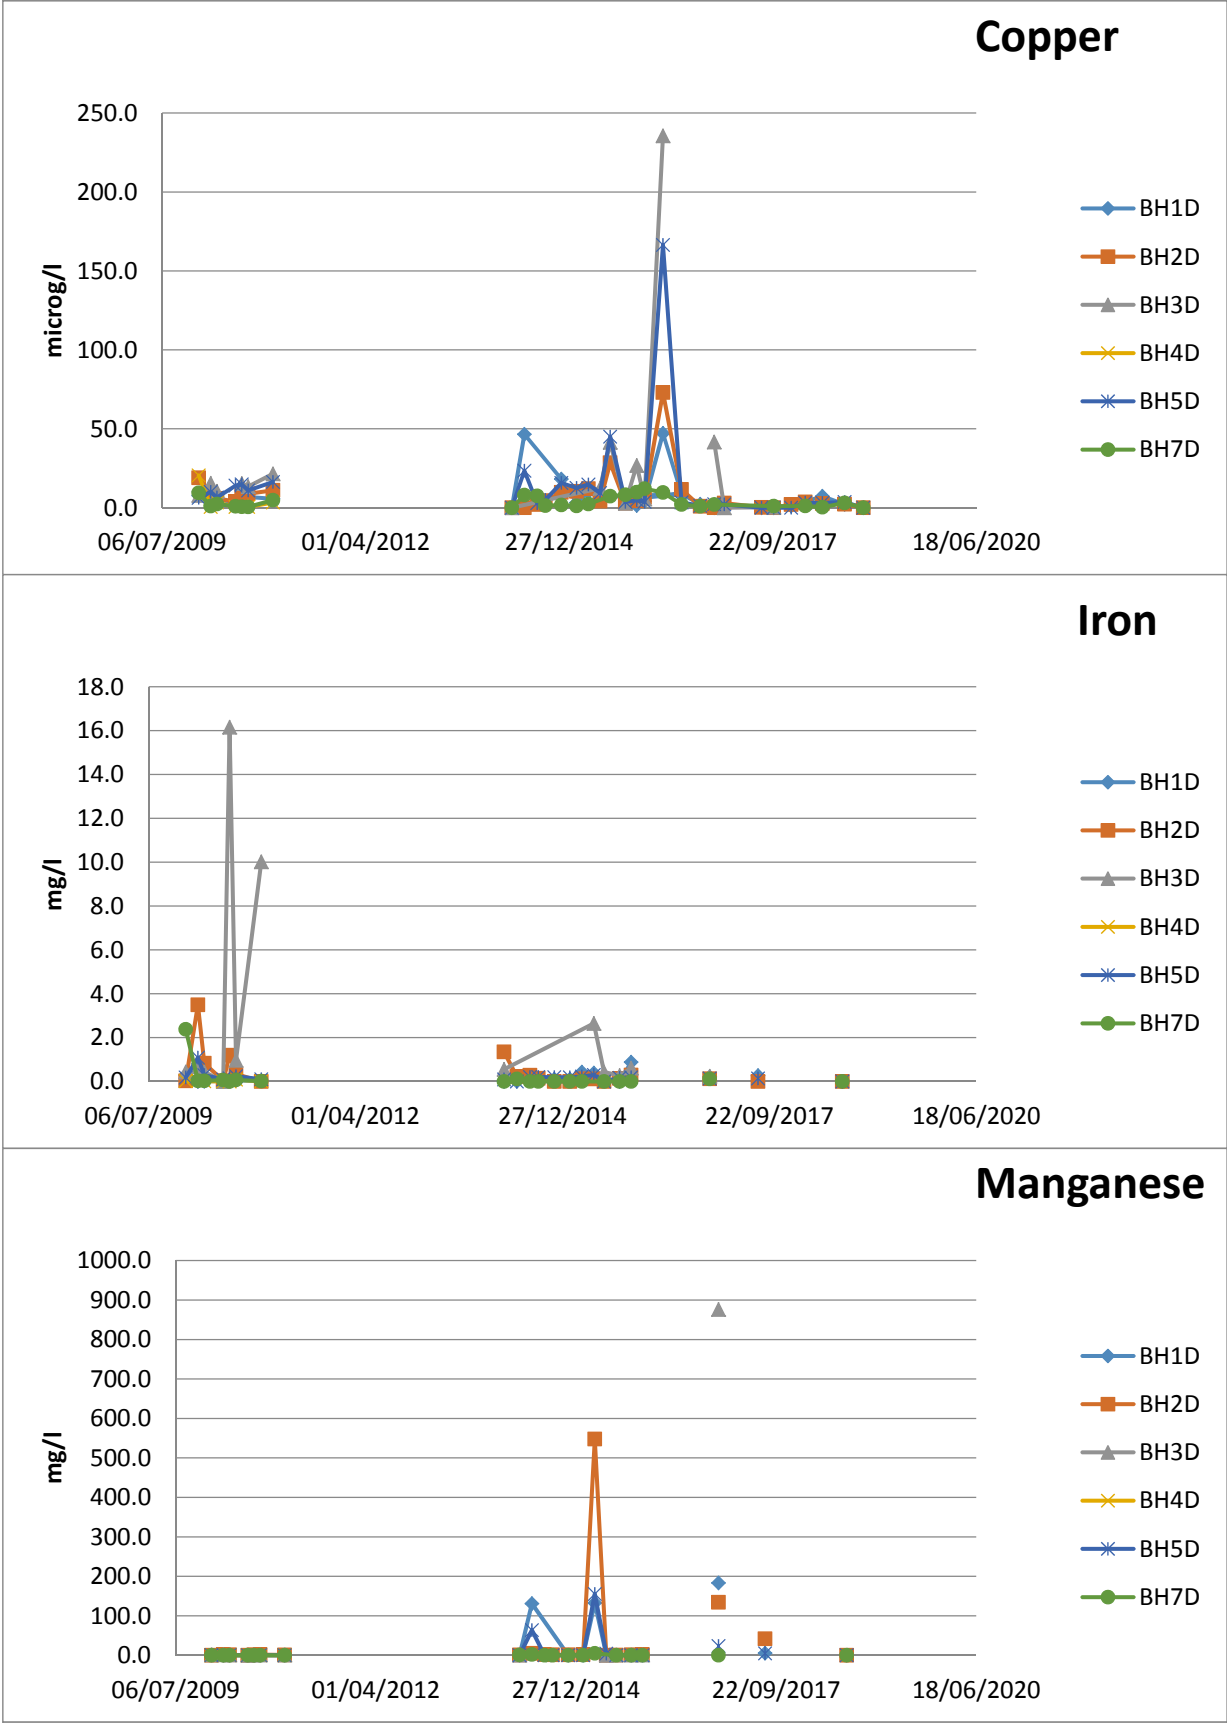

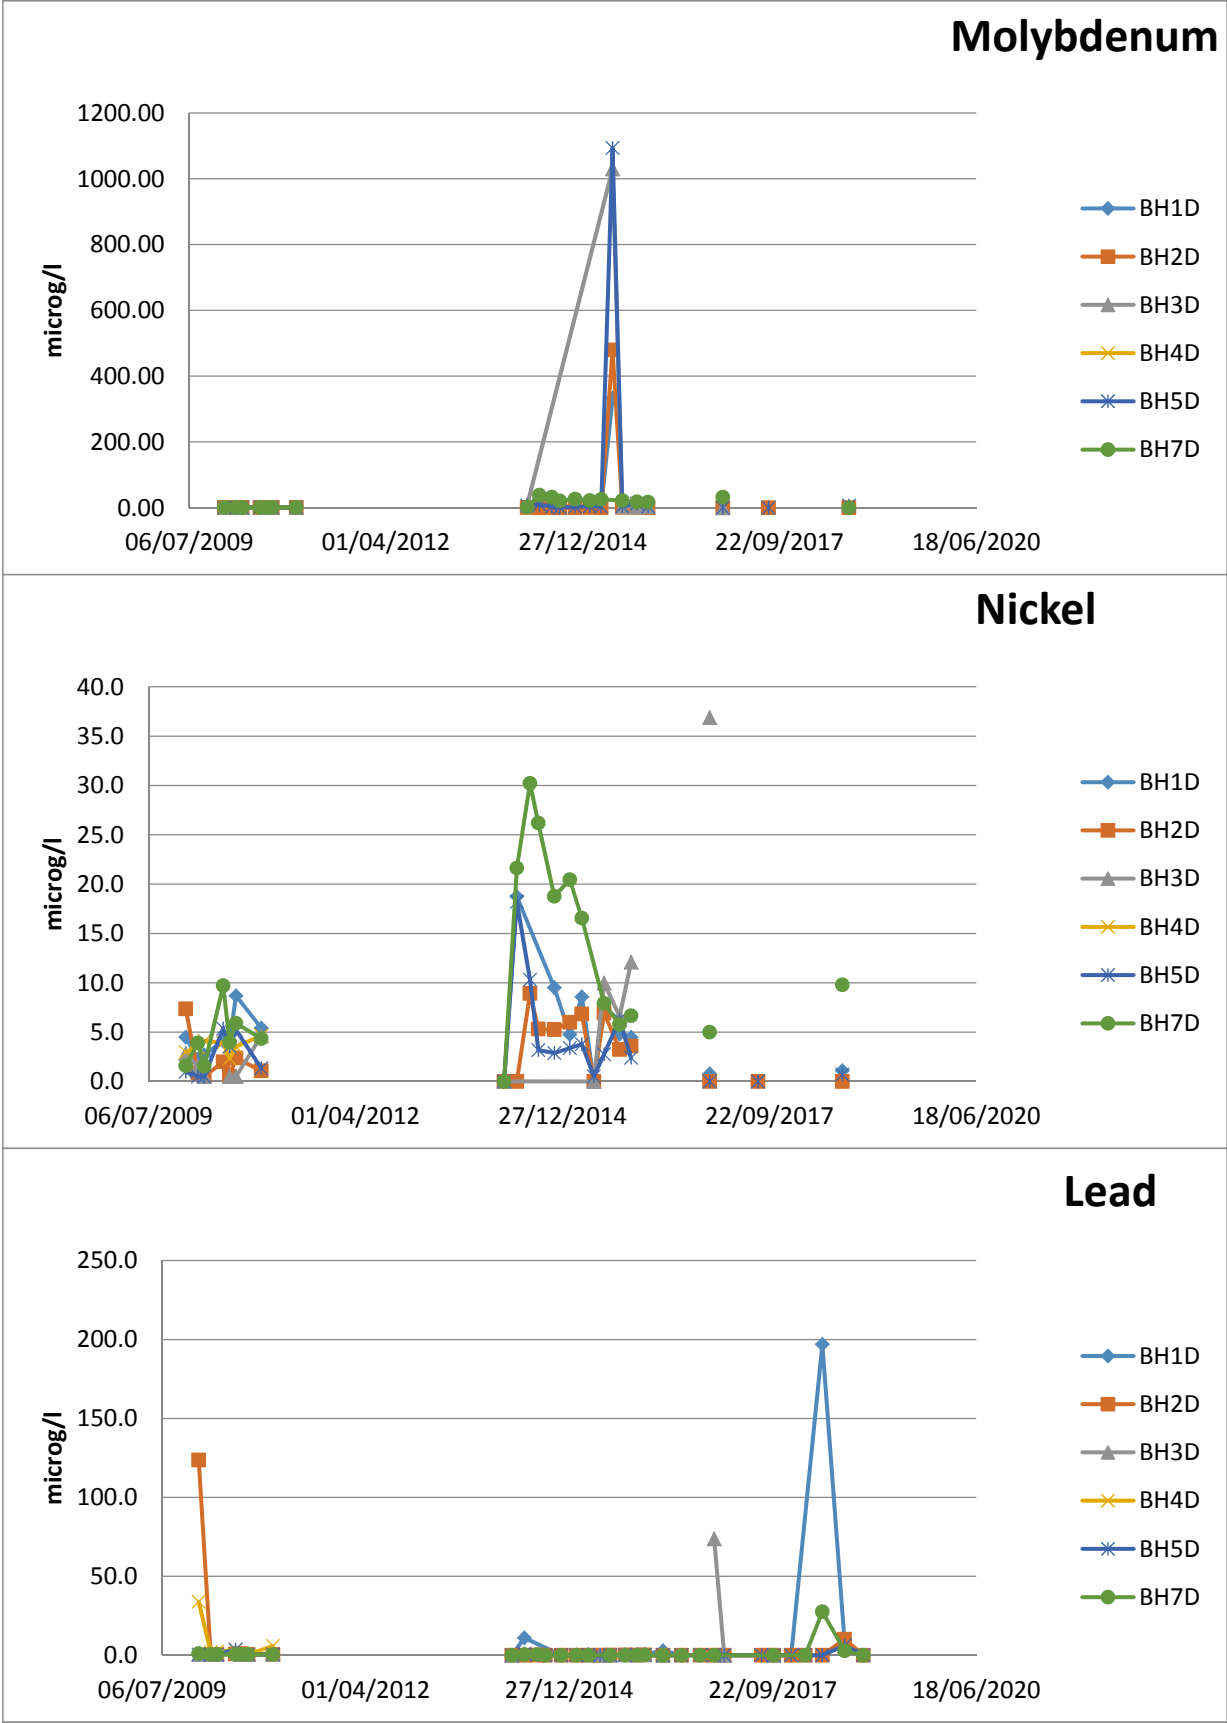

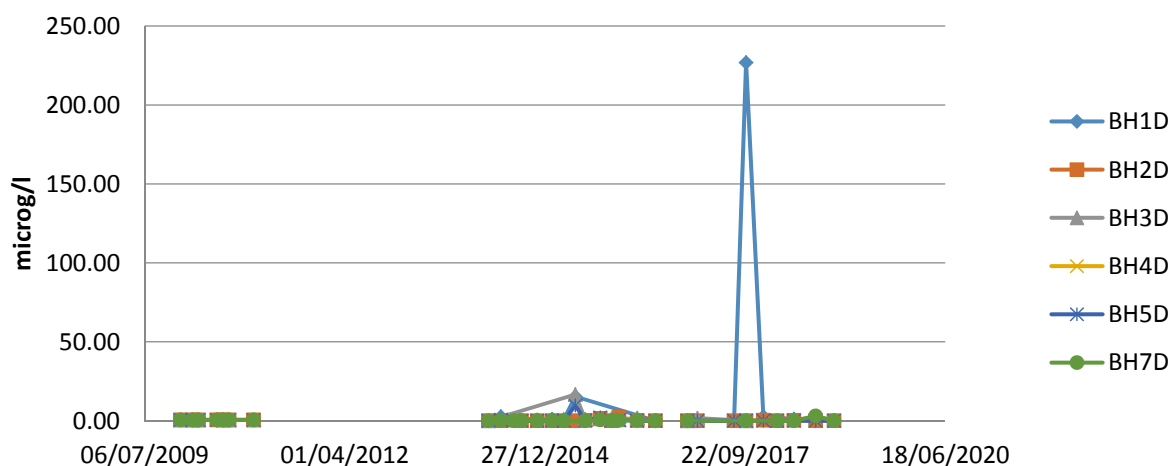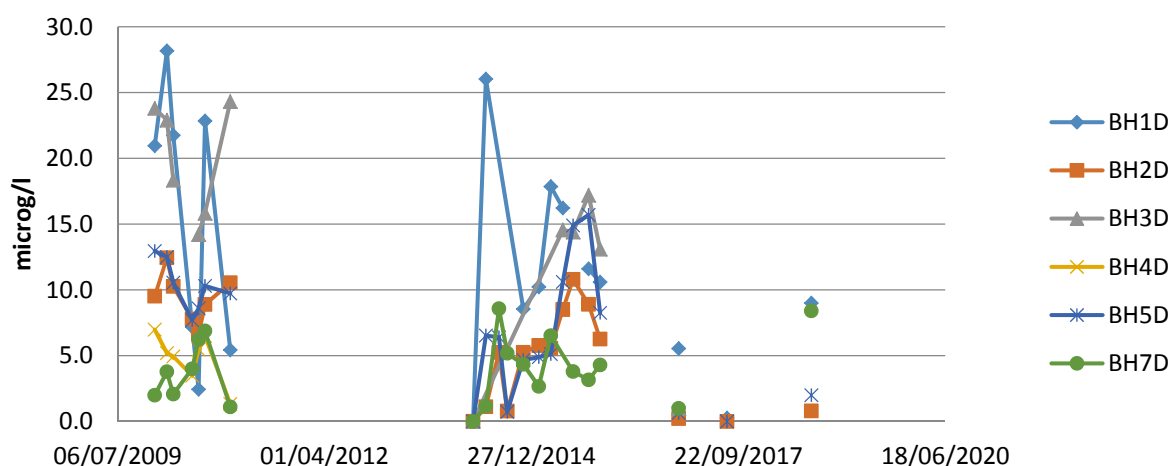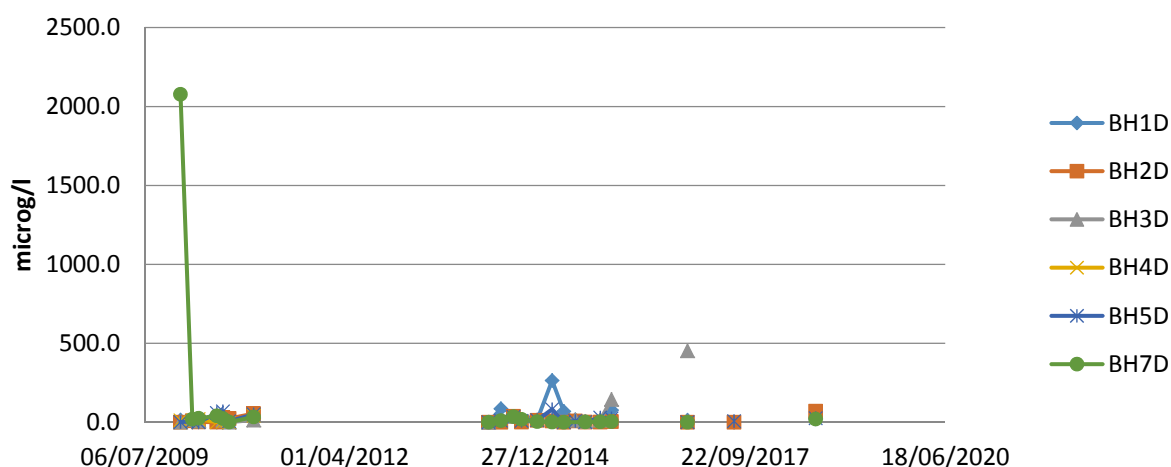Antimony**Vanadium****Zinc**


**EAST WASTE
MANAGEMENT SITE,
LLANWERN STEELWORKS**


PERMIT EAWML/30003


**2018 Annual Review of
Environmental
Monitoring**


**Appendix 2
Surface Water
Chemistry**


Report Number 1785r1v1d0219

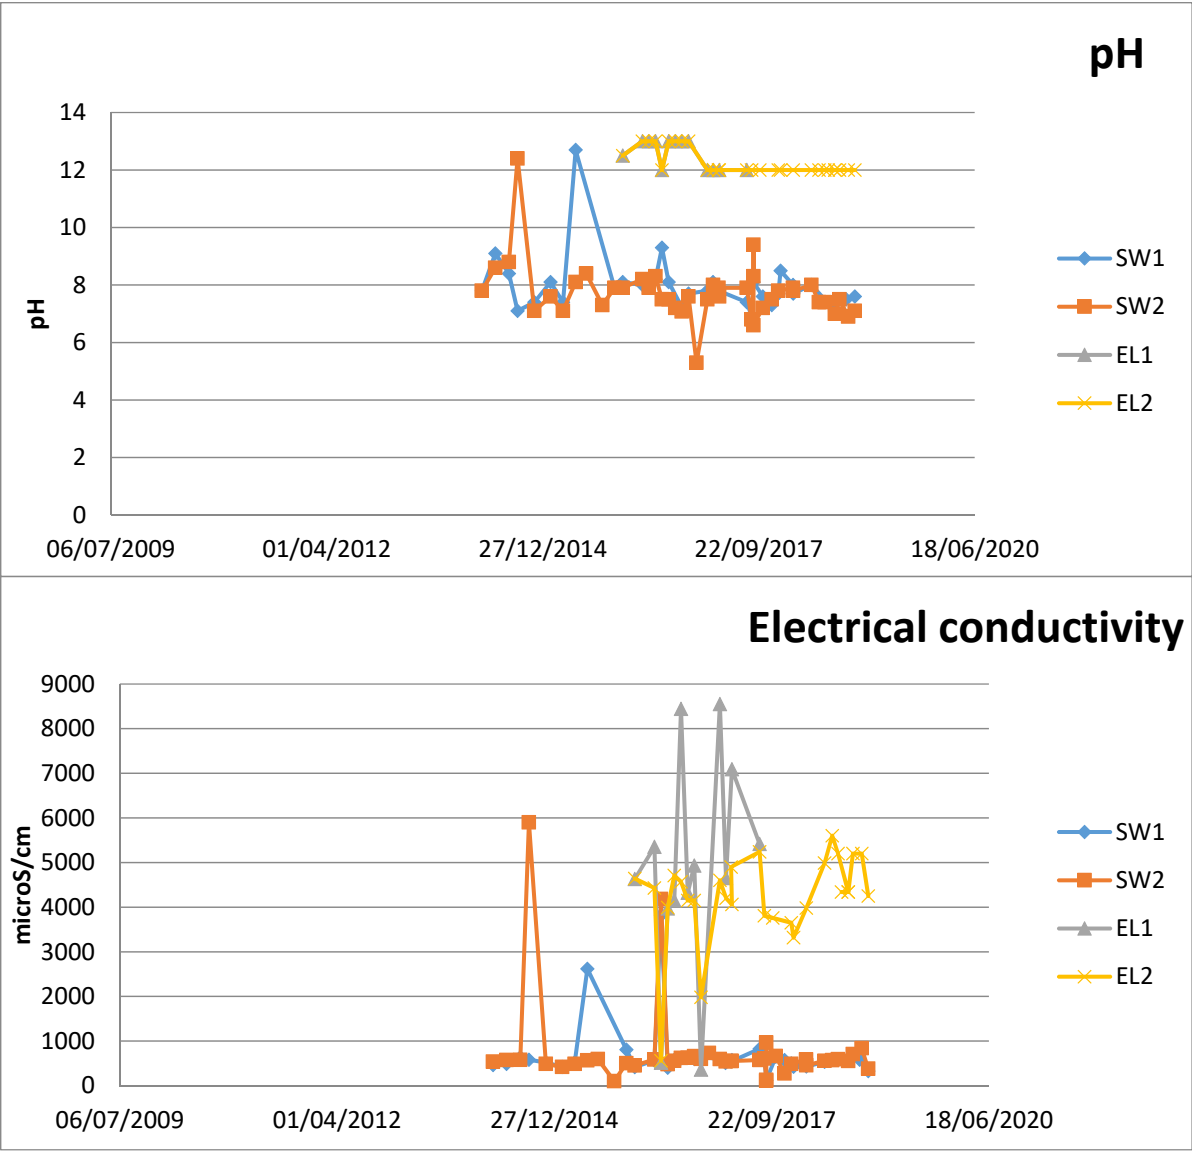


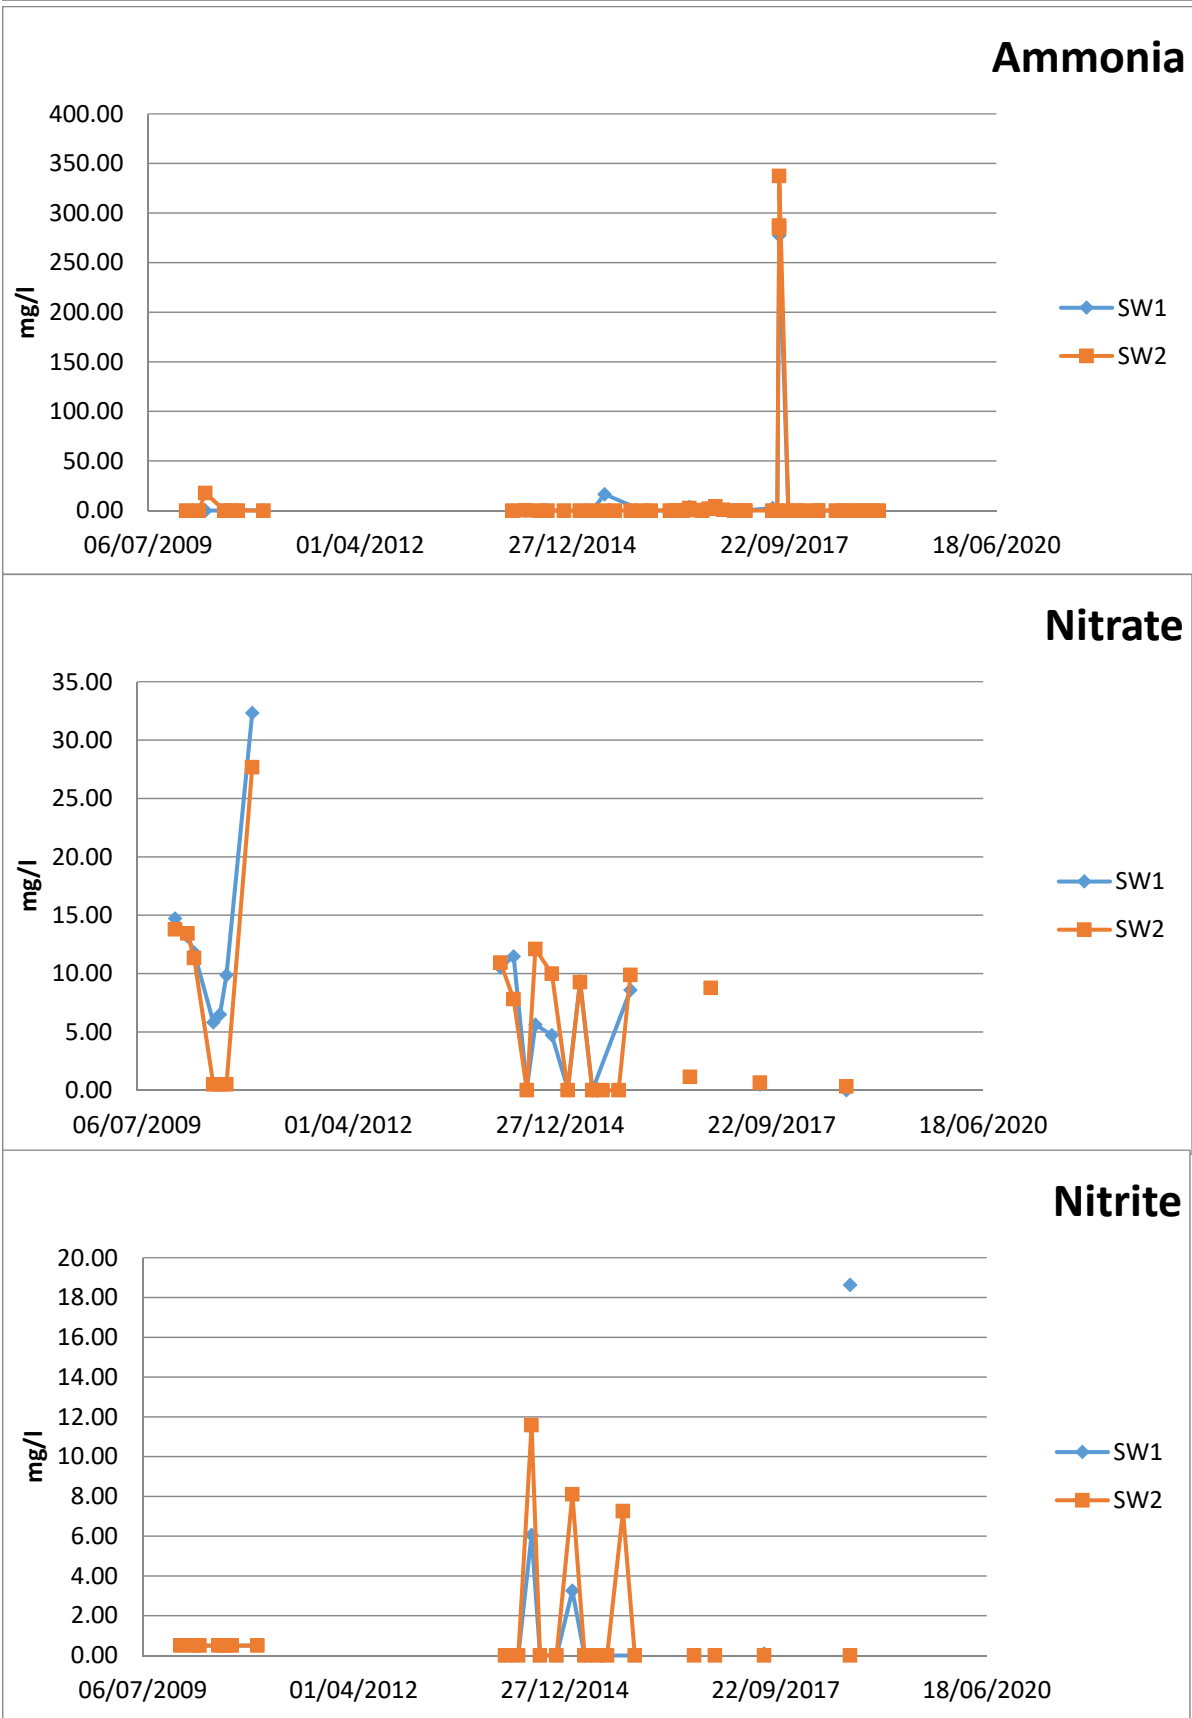


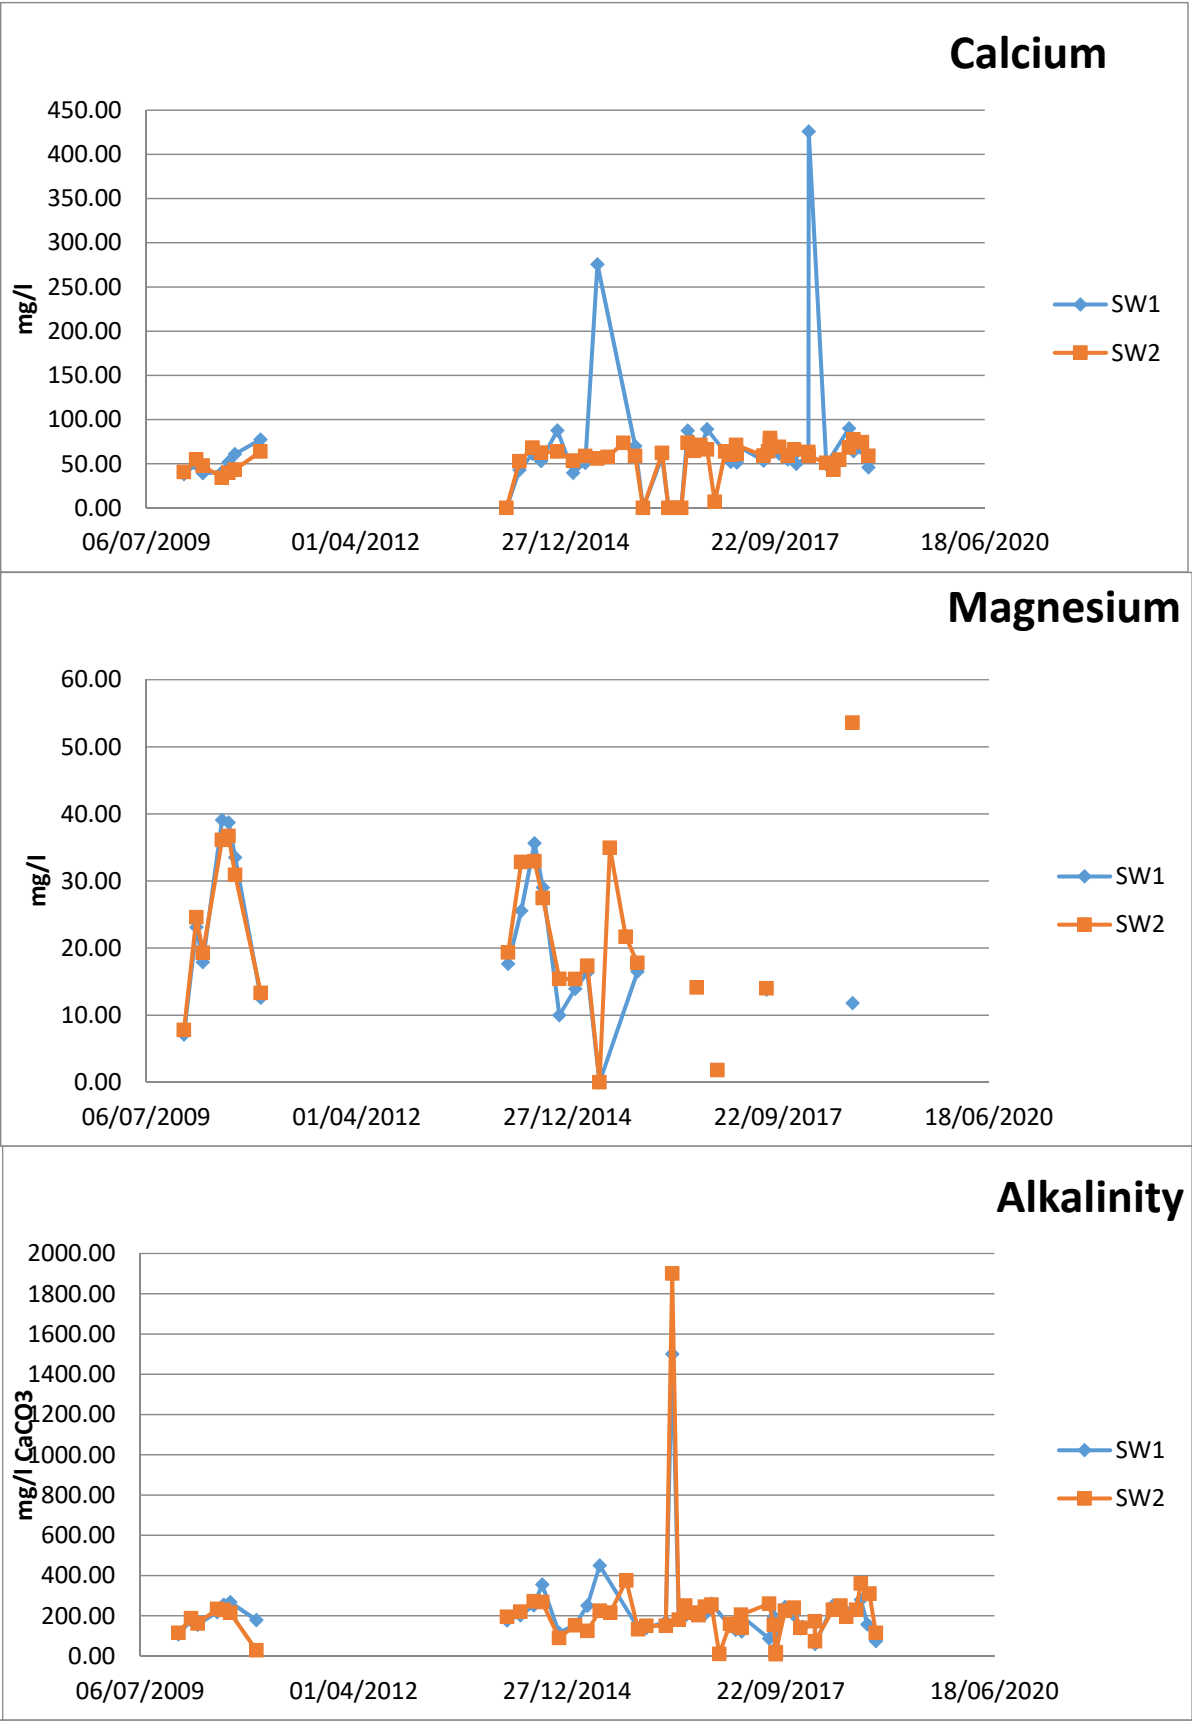


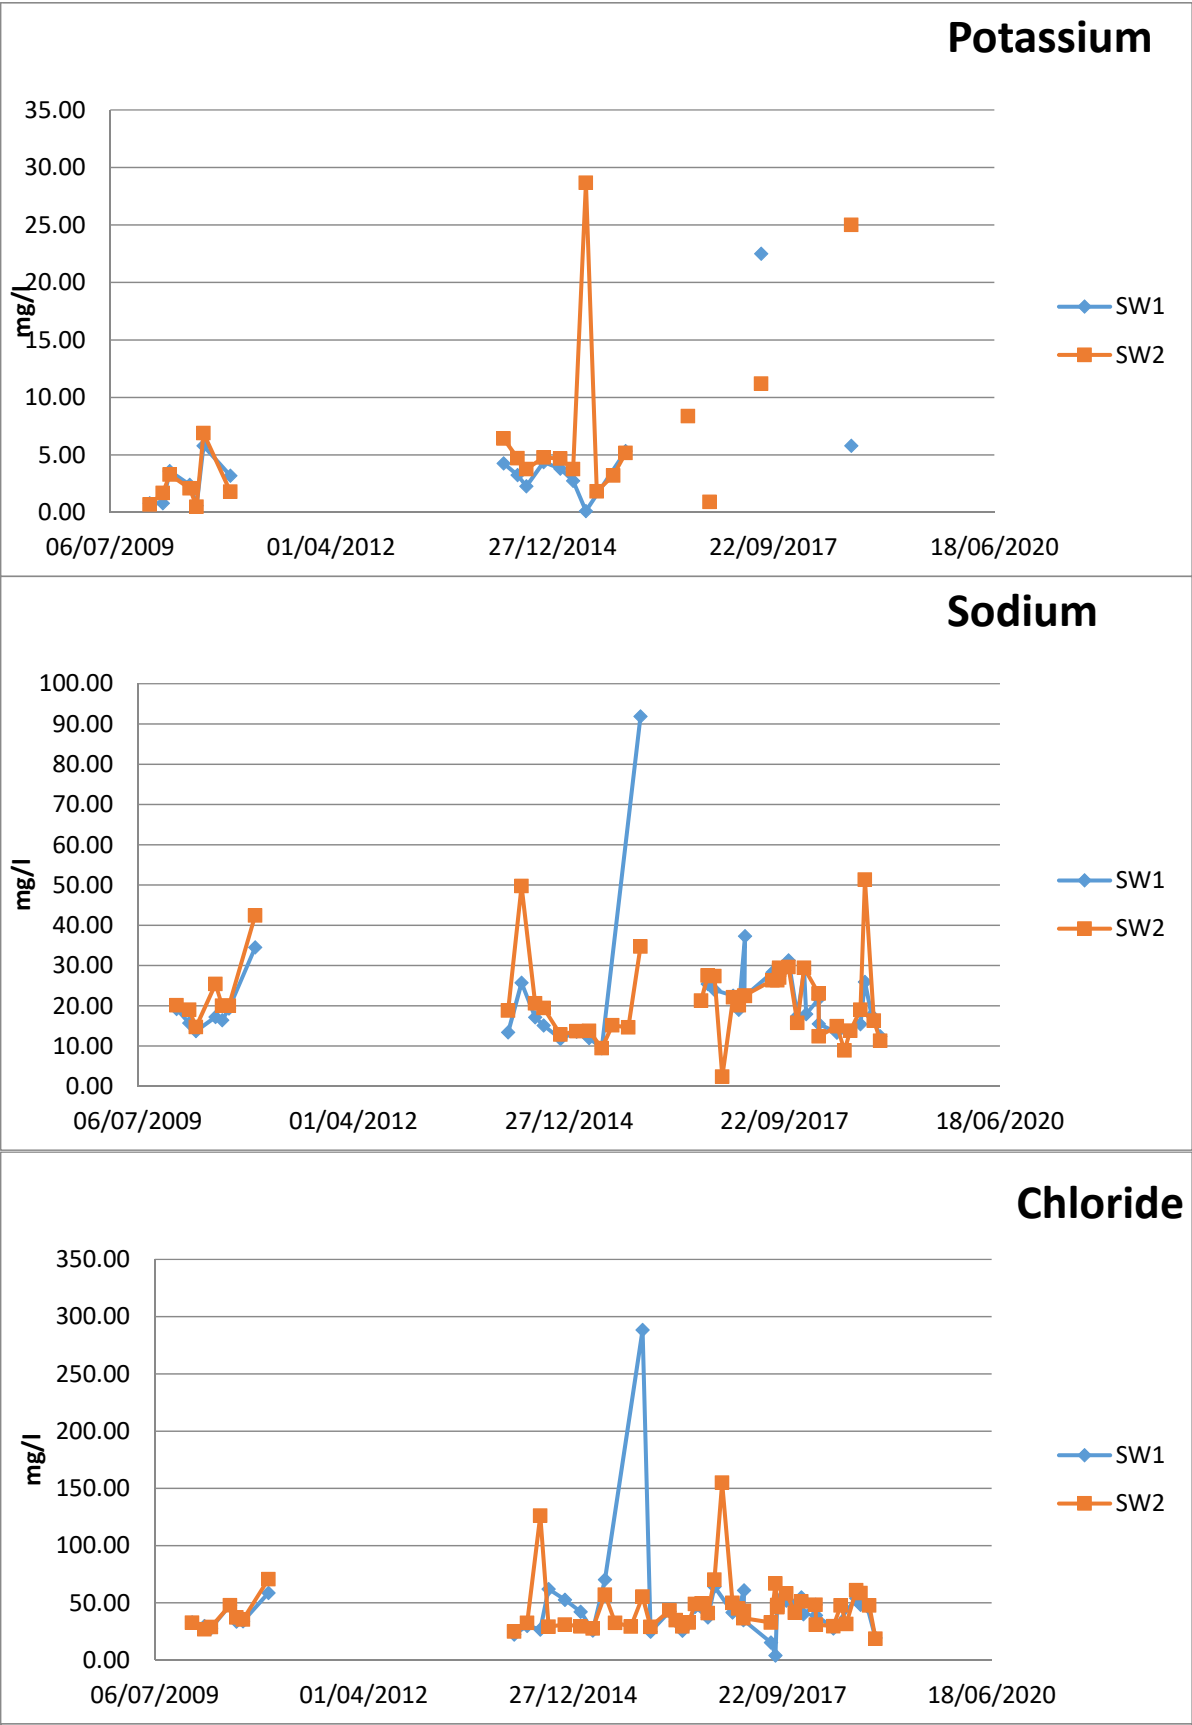




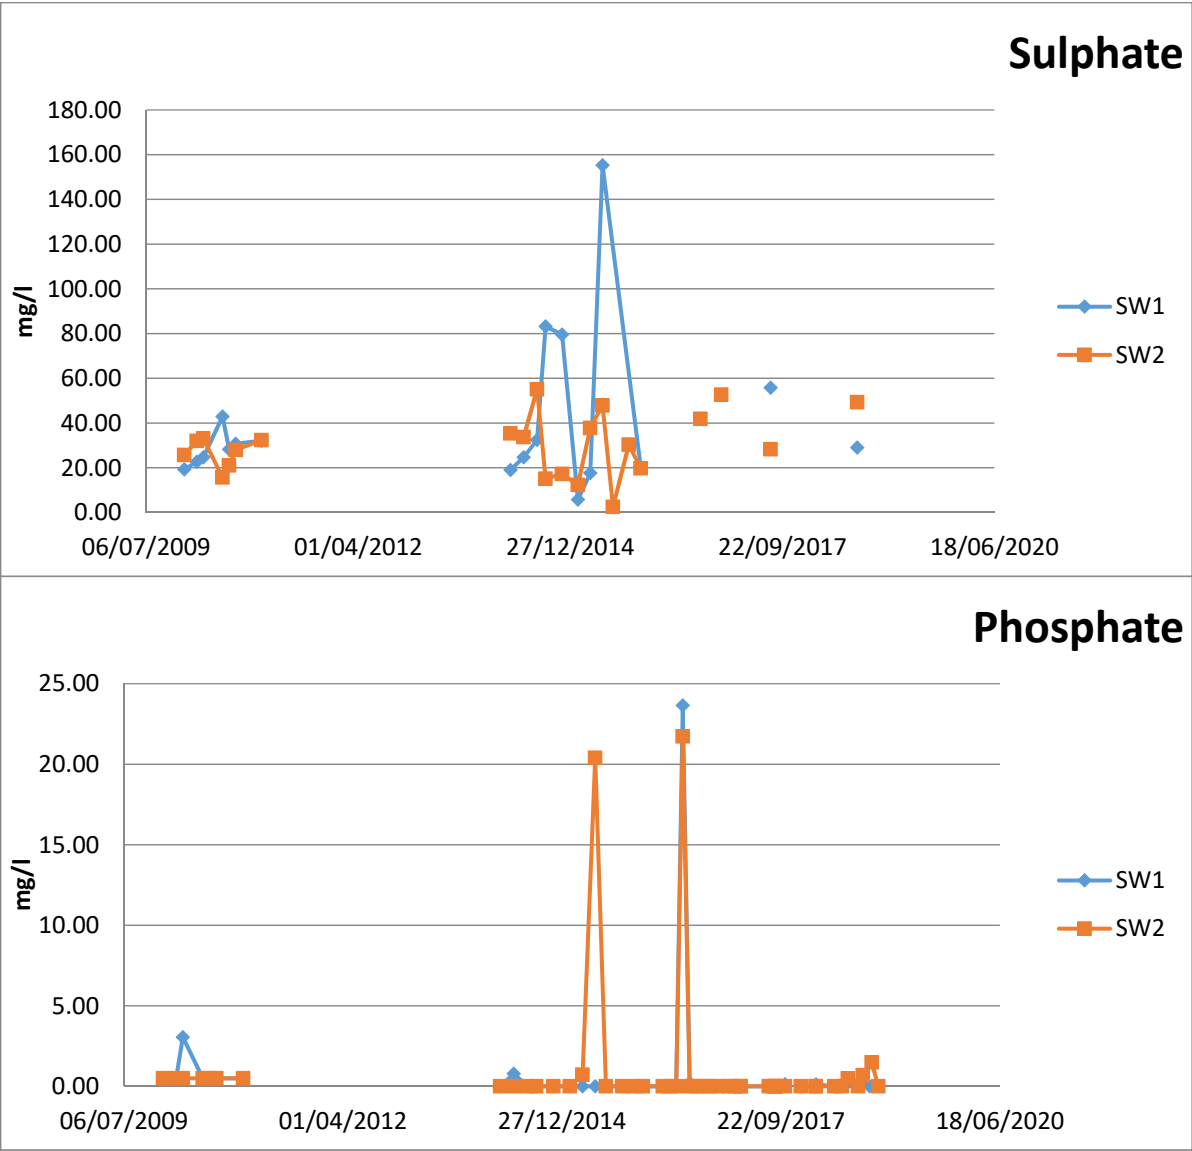


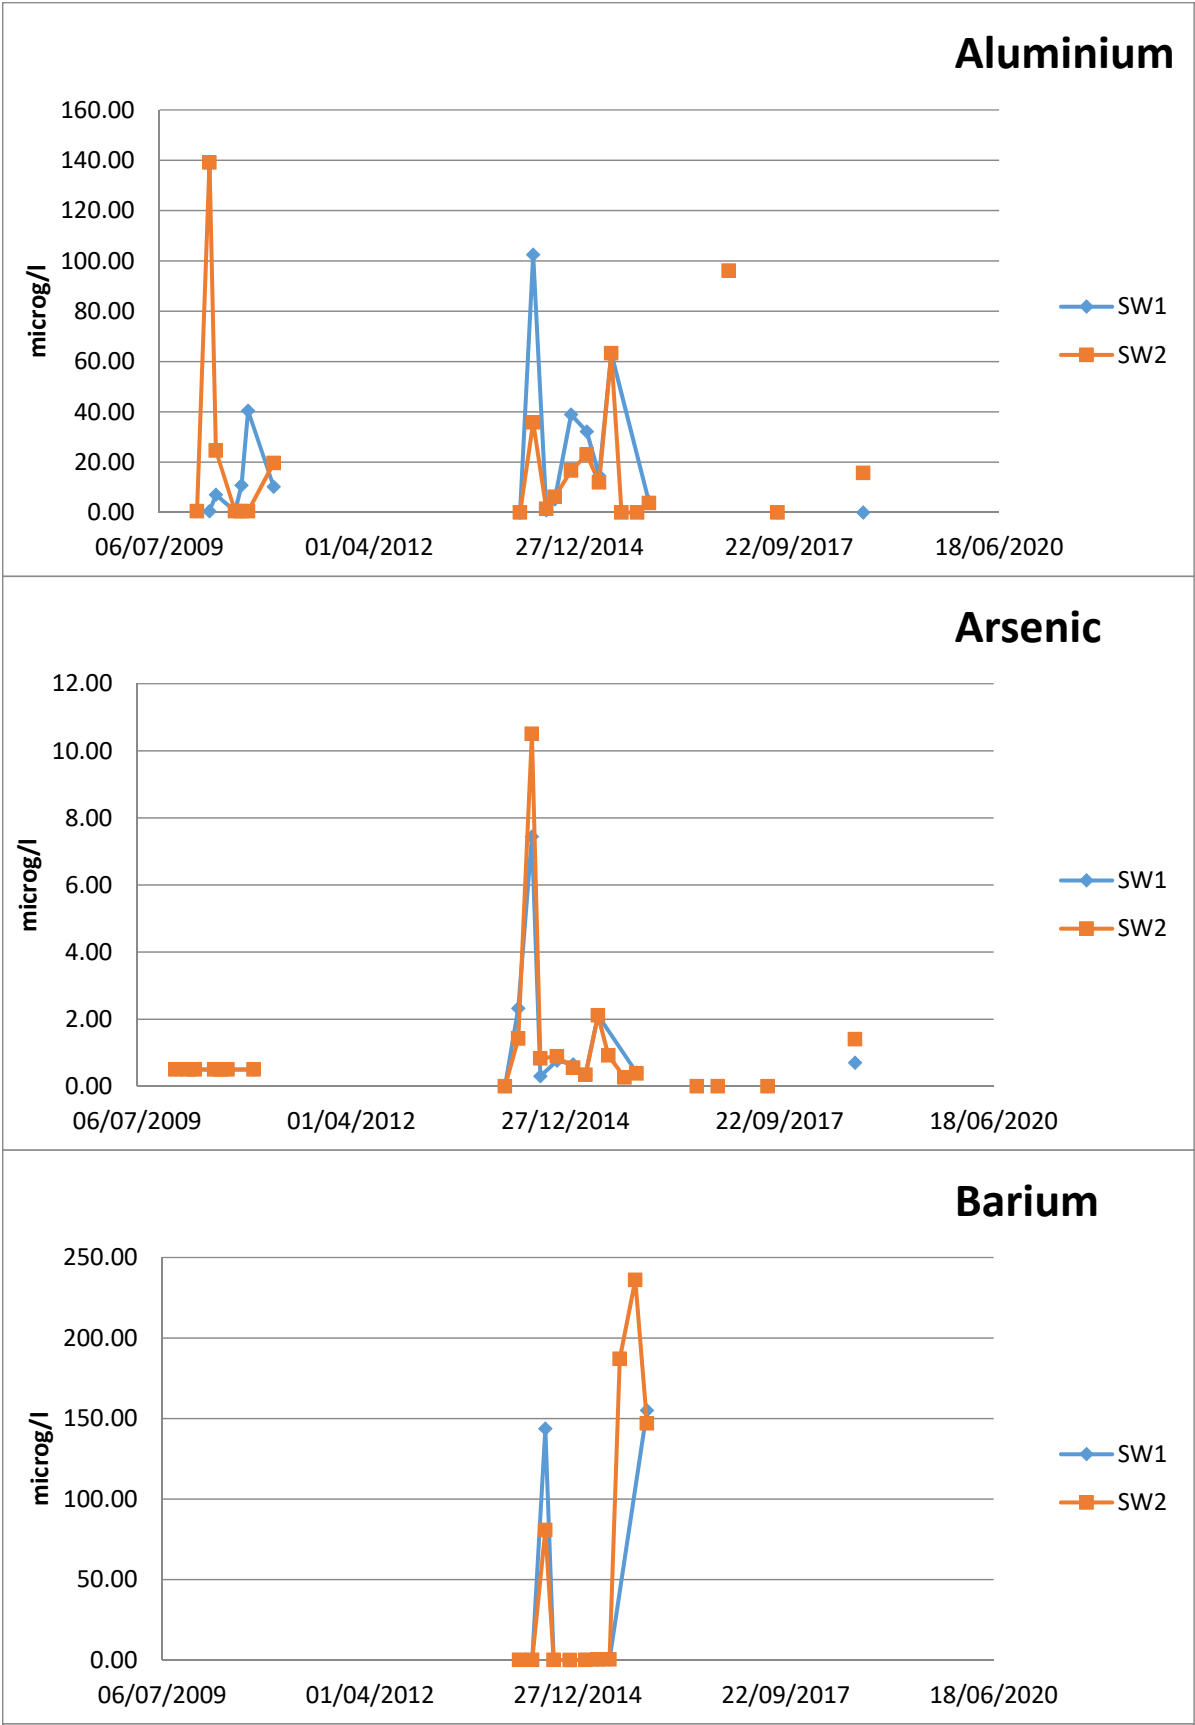

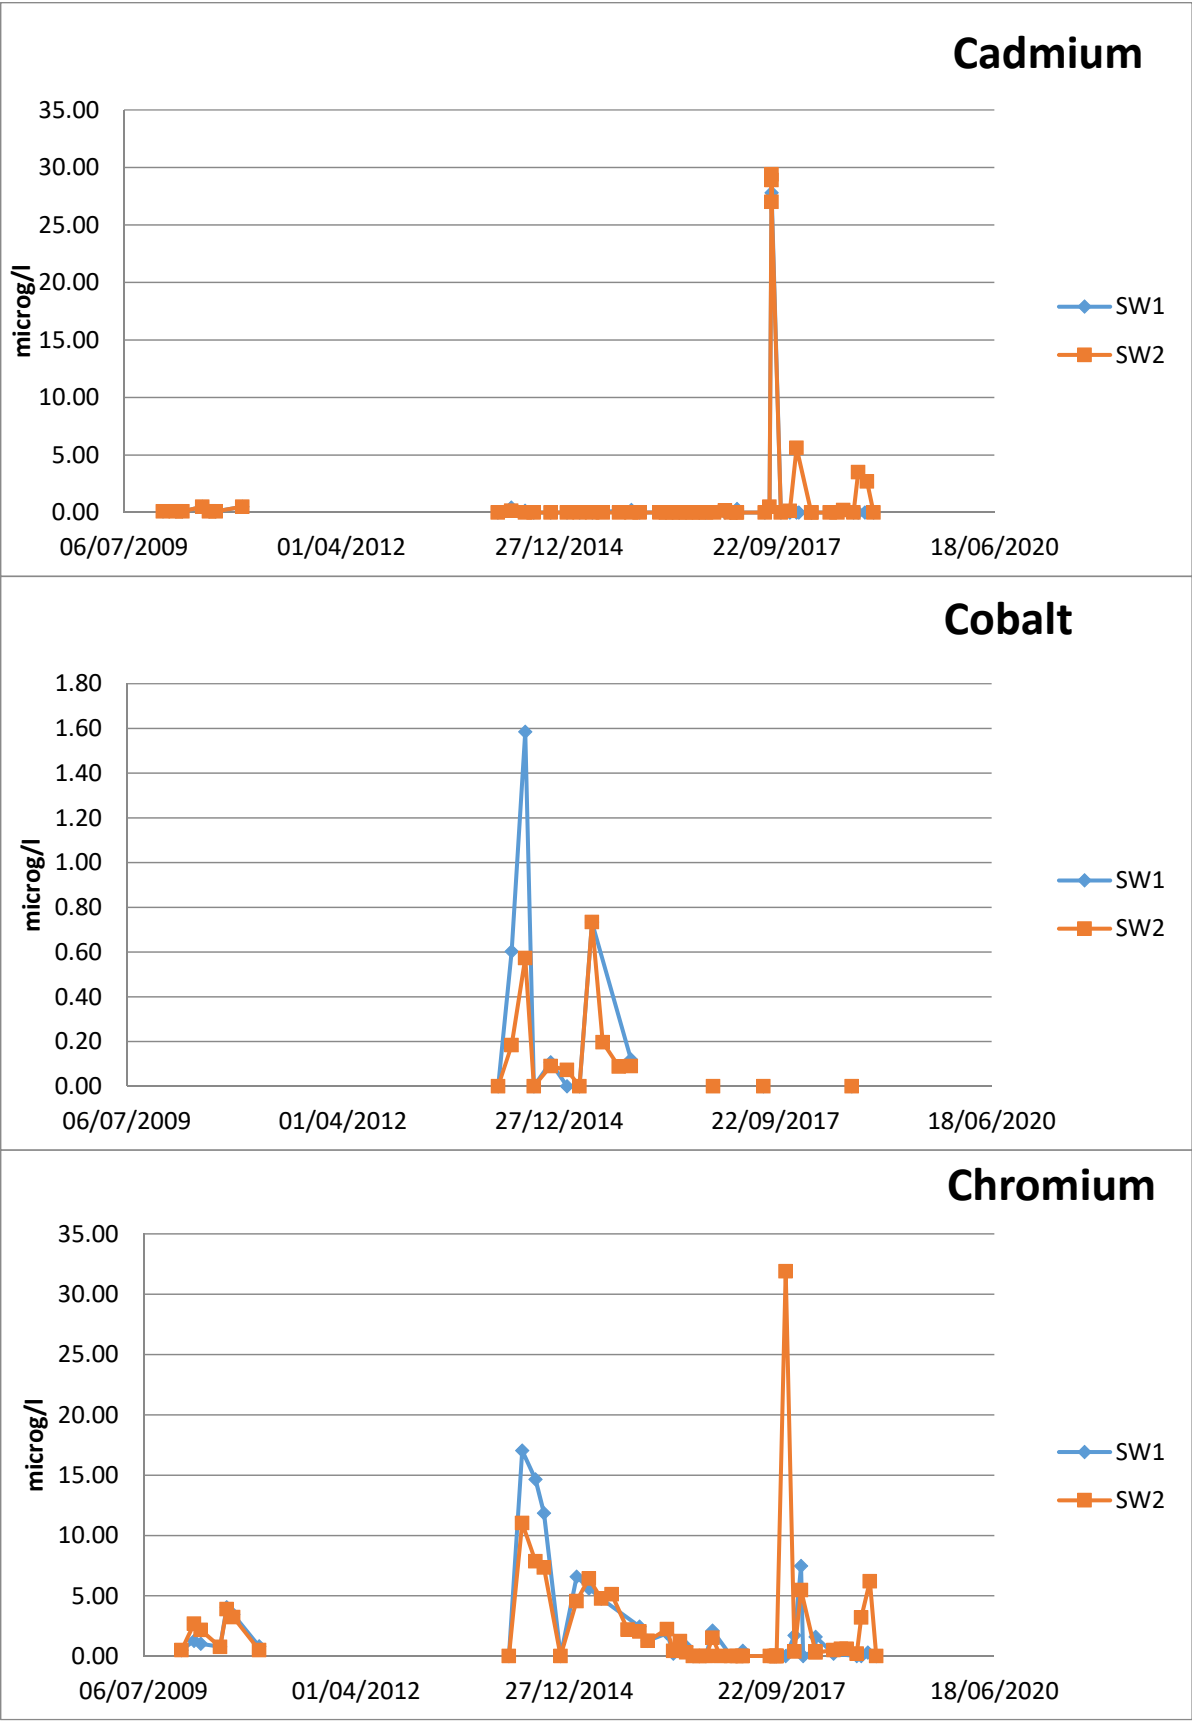

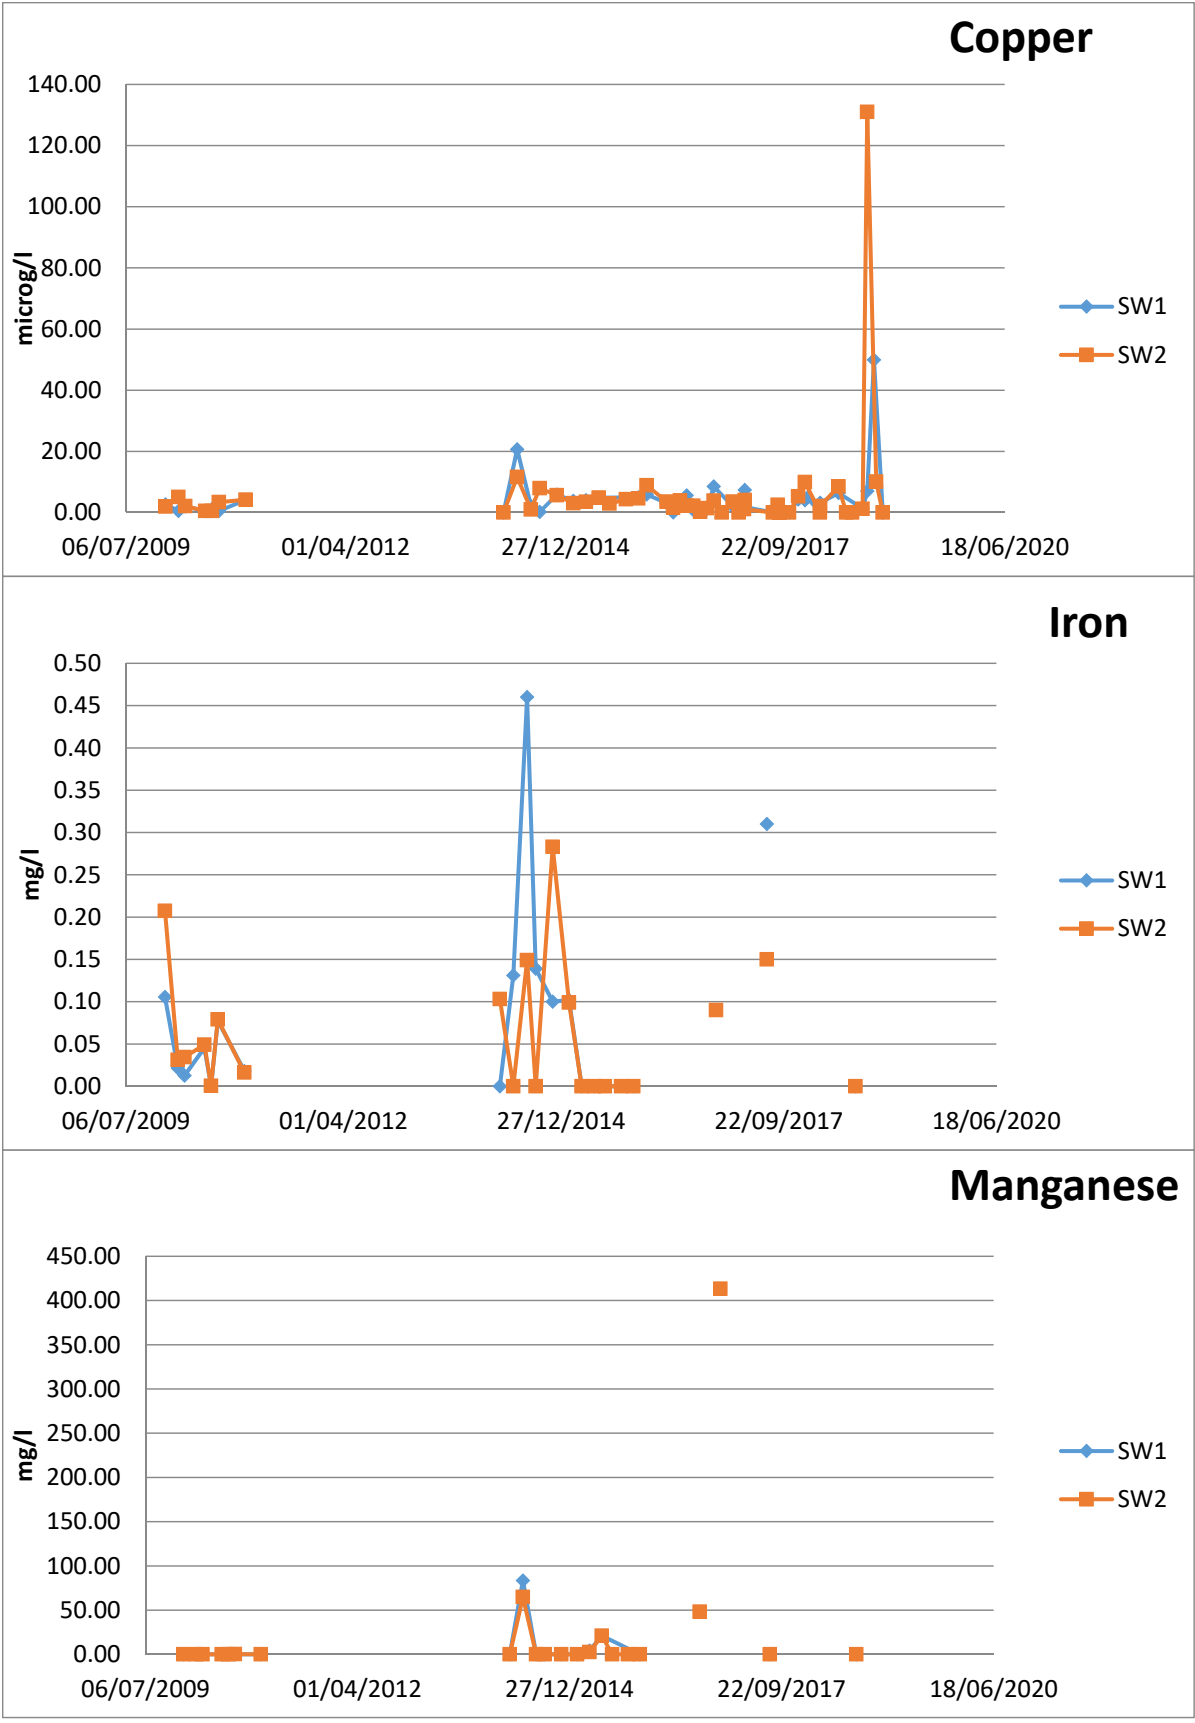

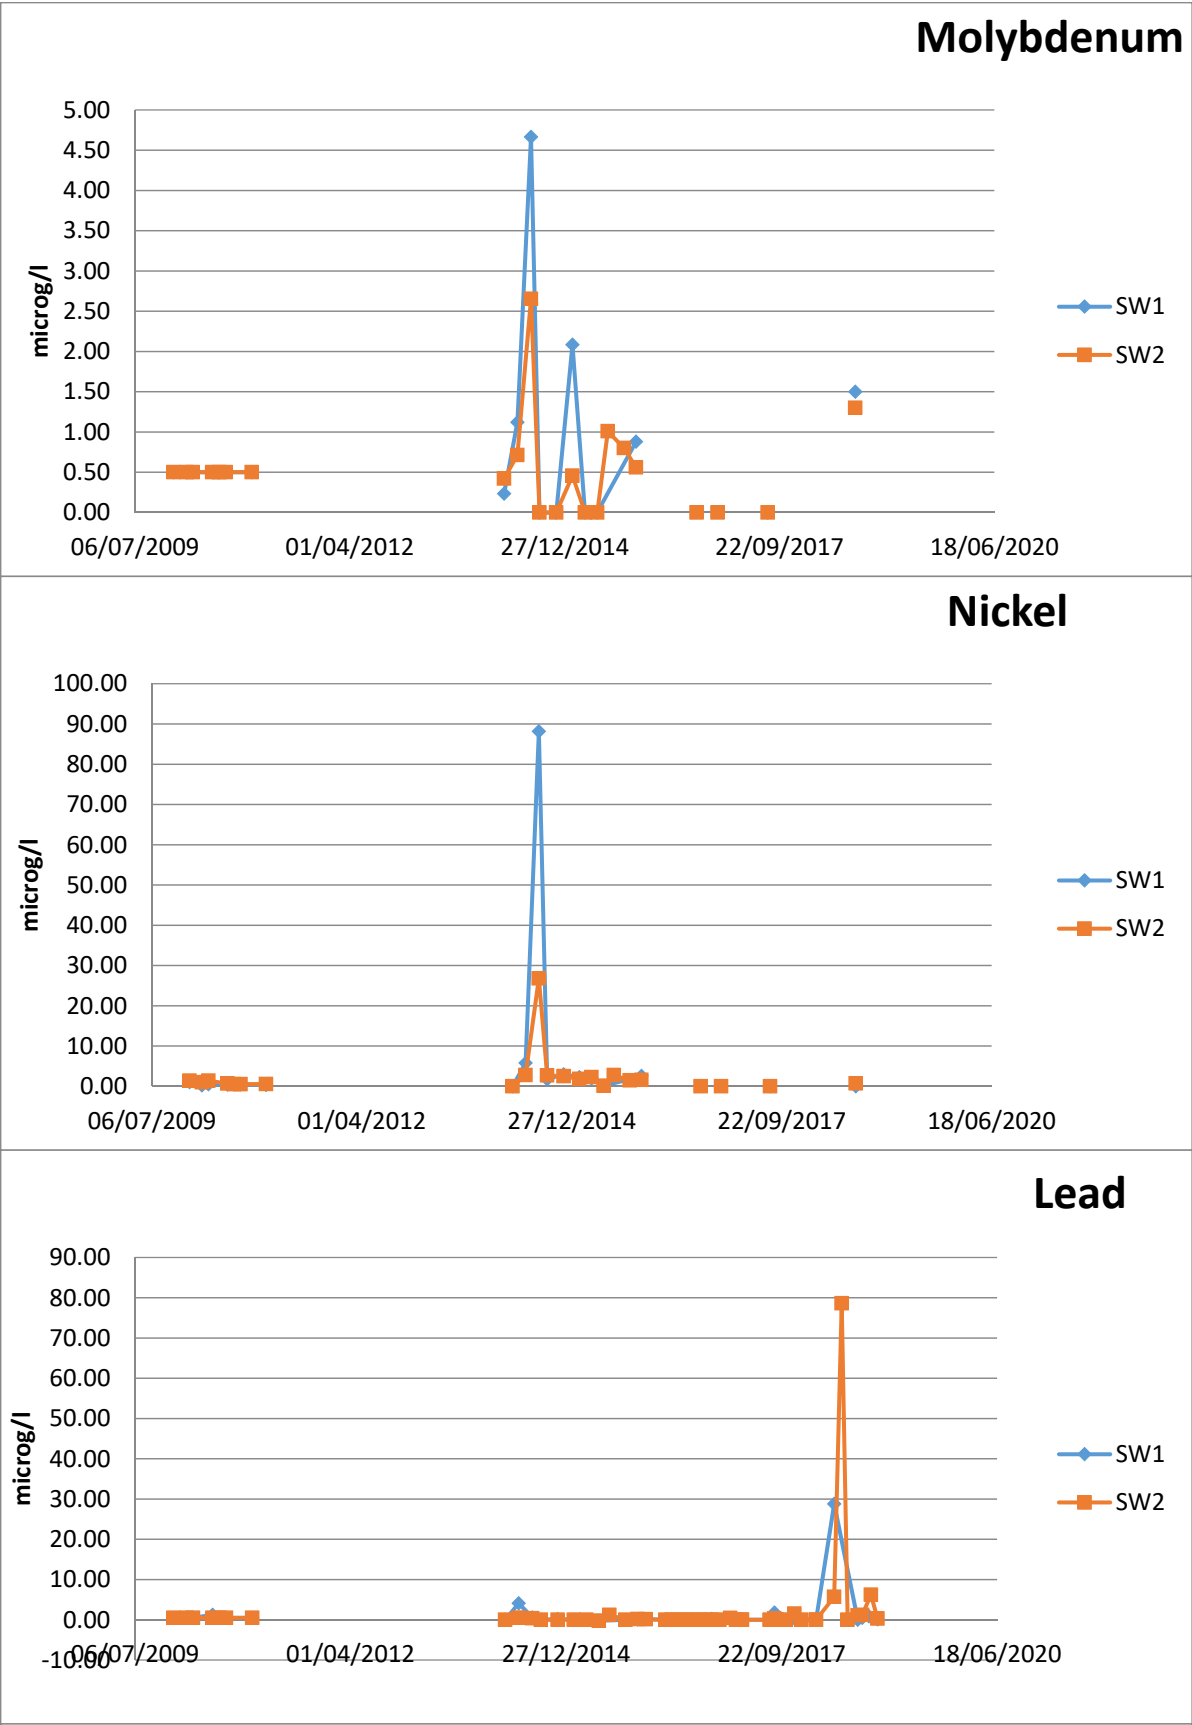

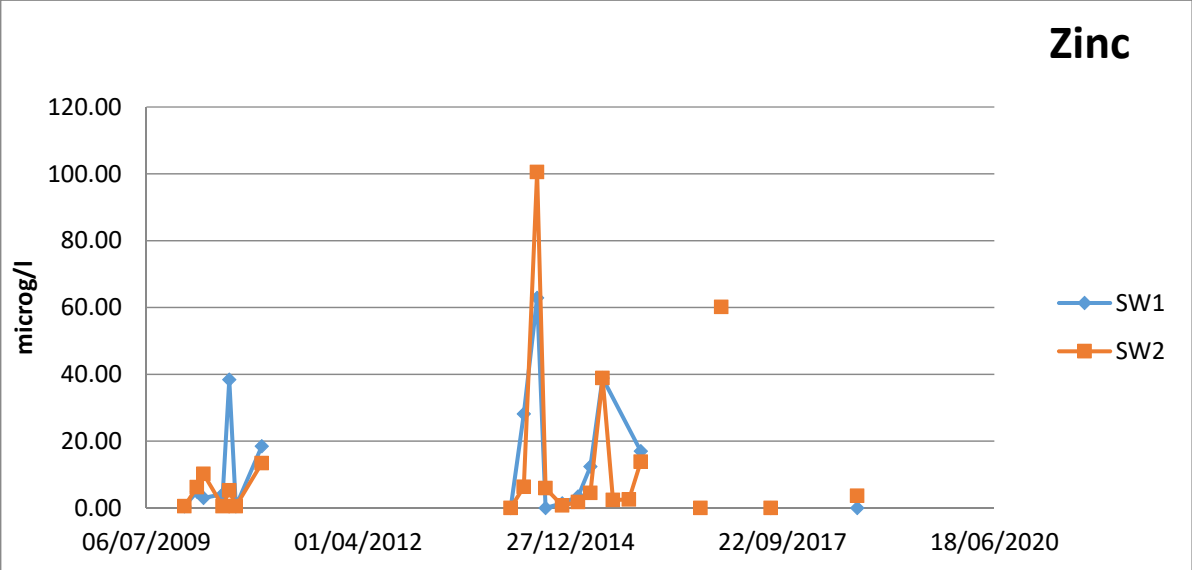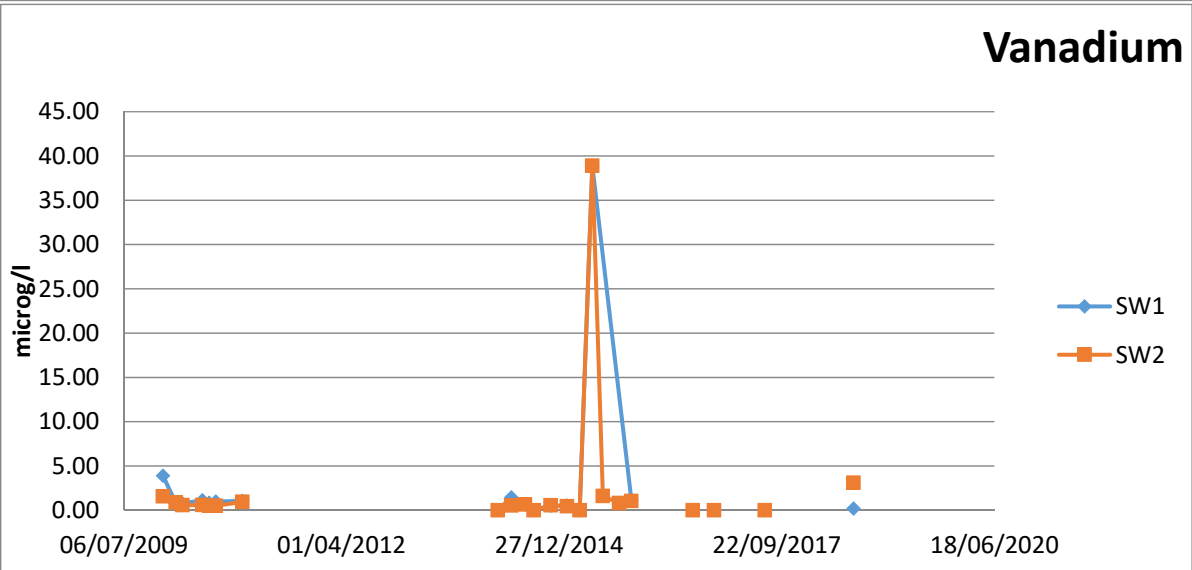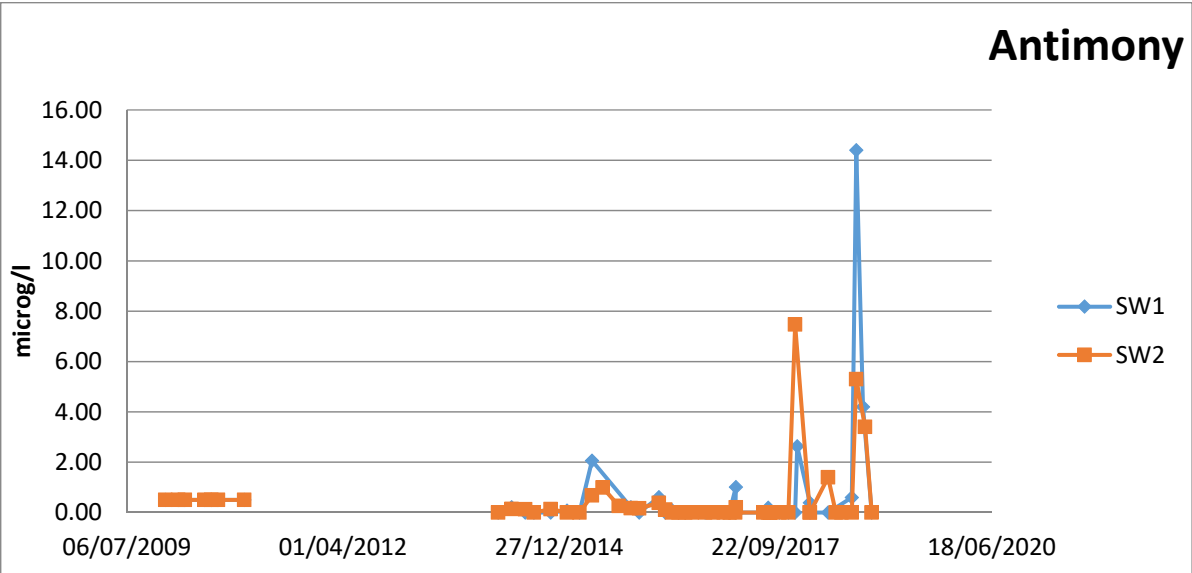



Geotechnical &
Environmental Services

Ty Coed
Cefn-yr-Allt
Aberdulais
Neath SA10 8HE

T 01639 775293
F 01639 779173

enquiries@geotechnology.net
www.geotechnology.net