

CONSENT NO.

CG0140001



ASiantaeth YR
AMGYLCHEDD CYMRU
ENVIRONMENT
AGENCY WALES

WATER RESOURCES ACT 1991

SECTION 88 - SCHEDULE 10

(AS AMENDED BY THE ENVIRONMENT ACT 1995)

VARIATION OF CONSENT TO DISCHARGE

TO: Environment Quality Scientist
Dŵr Cymru Cyfyngedig
Pentwyn Road,
Nelson,
Treharris
Mid Glamorgan CF46 6LY

In pursuance of an application by the consent holder for variation of consent, the **ENVIRONMENT AGENCY** ("The Agency") in pursuance of its powers under the Water Resources Act 1991 **HEREBY VARIES ITS CONSENT** to the making of a discharge **OF SEWAGE EFFLUENT**, as follows:

Secondary Treated Sewage Effluent

with respect to modification of Consent No. CG0140001 issued on the 23rd day of November 1992

FROM: Aberffraw Wastewater Treatment Works

AT: Off Church Street, Aberffraw, Anglesey

TO: Coastal Waters - Aberffraw Bay


SUBJECT TO the conditions set out in the following schedule(s):

Secondary Treated Sewage Effluent

Schedule no CG0140001 01

Subject to the provisions of Paragraphs 7 and 8 of Schedule 10 of the Water Resources Act 1991, no notice shall be served by the Agency altering this consent without the agreement in writing of the Consent Holder, during a period of 4 years from the date this variation is issued.

This consent is issued and takes effect on the 28th day of March 2003

Signed 
Emyr Jones
Team Leader Environment Management

Asiantaeth yr Amgylchedd Cymru
Parc Menai, Ffordd Penlan, Bangor, Gwynedd, LL57 2EF
Ffon: 01248 670770 Ffacs: 01248 670561

Environment Agency Wales
Parc Menai, Penlan Road, Bangor, Gwynedd, LL57 2EF
Tel: 01248 670770 Fax: 01248 670561





ASiantaeth Yr
Amgylchedd Cymru
Environment
Agency Wales

CONSENT NO.	CG0140001
SCHEDULE NO.	CG0140001 01
DATE ISSUED	28 th March 2003

CONDITIONS OF CONSENT TO DISCHARGE

Secondary treated sewage effluent ("the Discharge")

FROM: Aberffraw Wastewater Treatment Works

NATURE

1. The Discharge shall consist solely of secondary treated sewage effluent.

LOCATION

2. The Discharge shall be made in the manner and at the place specified as:
 - (a) discharging via a 150 millimetre diameter pipe;
 - (b) discharging to the Carreg Foel - Aberffraw Bay;
 - (c) at National Grid Reference SH 34710 67510;
 - (d) shown marked 'Discharge Point' on Plan CG0140001 attached as Annex 3.

SAMPLE POINT

3. An appropriately labelled sample point shall be provided and maintained at National Grid Reference SH 35013 68494, as shown marked 'Discharge Sample Point' on the attached Plan CG0140001, or some other point as agreed in writing with the Agency, so that a representative spot sample of the Discharge may be obtained. The Consent Holder shall ensure that all constituents of the Discharge pass through the said sampling point at all times and in any legal proceedings it shall, for the purposes of Section 10 of the Rivers (Prevention of Pollution) Act 1961, be presumed, until the contrary is shown, that any sample of the Discharge taken at the said sampling point is a sample of what was being discharged into controlled waters.





CONSENT NO.	CG0140001
SCHEDULE NO.	CG0140001 01

VOLUME

4. The volume of the Discharge shall not exceed 259 cubic metres per day.
5. The Dry Weather Flow of the Discharge shall not exceed 98 cubic metres per day.

For the purpose of this condition Dry Weather Flow shall mean the average daily flow to the treatment works during seven consecutive days without rain (excluding a period which includes public holidays) following seven days during which the rainfall did not exceed 0.25 millimetres on any one day.

6. The rate of discharge shall not exceed 3 litres per second.

FLOW MEASUREMENT

7. A continuous flow monitoring and recording system, to a specification provided by the Agency, with on-site visual display from which readings can be readily obtained by the Agency, shall be provided and operated to record the daily volume and instantaneous flow of sewage through the treatment works.
8. As soon as practicable after completion of the flow system installation the Consent Holder shall employ an independent expert to certify that the installation complies with the Agency's specification. The Consent Holder shall satisfy himself as to the professional competence of the expert. A copy of the certifier's report shall be provided to the Agency when it is available.
9. Records of the flow readings shall be maintained by the Consent Holder and shall be provided to the Agency when requested, in a format specified by the Agency.
10. The Consent Holder shall produce and maintain a quality control manual, approved by the independent expert and to the satisfaction of the Agency, specifying procedures for the calibration, operation and maintenance of the flow monitoring system. The flow system shall be calibrated, operated and maintained by the Consent Holder in accordance with the provisions of the manual. The Consent Holder shall keep a record of these procedures available for inspection by the Agency and provide a copy to the Agency on request.
11. The Consent Holder shall record all failures of the continuous flow system and any other breaks in the flow record. The reasons for these failures and breaks shall be recorded and all steps taken to prevent a re-occurrence. The Consent Holder shall ensure that as far as possible the recorder remains fully operational at all times. Any failures shall be remedied as soon as possible.





CONSENT NO.	CG0140001
SCHEDULE NO.	CG0140001 01

12. Flows of the discharge shall be measured at NGR SH 35012 68496, or such other point as is agreed by the Agency.

COMPOSITION

13. (a) Subject to paragraph (b) below, the Discharge shall not contain more than;
- (i) 40 milligrammes per litre of biochemical oxygen demand (measured after 5 days at 20⁰ C with nitrification suppressed by the addition of allyl-thiourea)
 - (iii) 60 milligrammes per litre of suspended solids (measured after drying at 105⁰C);
- (b) The limit for any of the relevant parameters set out in paragraph (a) above may be exceeded where, in any series of samples of the Discharge taken at regular but randomised intervals in any period of twelve consecutive months as listed in Column 1 of the table at Annex 1 to this consent, no more than the relevant number of samples, as listed in Column 2 of the said table, exceed the applicable limit for that relevant parameter.
14. The Discharge shall not contain more than 80 milligrammes per litre of biochemical oxygen demand (measured after 5 days at 20⁰ C with nitrification suppressed by the addition of allyl-thiourea).
15. The Discharge shall not contain more than 250 milligrammes per litre of suspended solids (measured after drying at 105⁰C);

WORKS OPERATION

16. The works shall be operated and the effluent shall be treated in a manner which, so far as reasonably practicable, minimises the polluting effects of the discharge made from the works on controlled waters.

This condition does not require -

(a) any higher standard to be achieved in relation to any characteristic of the discharge which is specifically regulated by conditions 13, 14 and 15 than is required by those conditions;

(b) any alteration of the works or a change in the type of treatment used.





CONSENT NO.	CG0140001
SCHEDULE NO.	CG0140001 01

MAINTENANCE

17. The works shall be operated and maintained in accordance with good operational practice such that:
- (a) It remains fully operational except at times of unavoidable mechanical or electrical breakdown which shall be attended to, and the Agency informed of the failure, as soon as practicable after the failure;
 - (b) Following a failure all equipment shall be returned to normal operation as soon as practicable;
 - (c) Tanks shall be desludged at sufficient frequency and in such a manner to prevent excessive carryover of suspended solids.

UNUSUAL WEATHER CONDITIONS

18. (a) No sample of the discharge, taken at a time when unusual weather conditions are adversely affecting the operation of the sewage treatment works, shall be taken into account in deciding whether or not conditions 13, 14, 15 and 16 of this consent schedule have been complied with.
- (b) For the purpose of this condition "unusual weather conditions" shall include:
- (i) low ambient temperatures as evidenced by effluent temperatures of 5°C or less, or by the freezing of mechanical equipment in the works;
 - (ii) significant snow deposits;
 - (iii) tidal or fluvial flooding;
 - (iv) weather conditions causing unforeseen loss of power supply to the sewage treatment which could not be ameliorated by the reasonable provision and operation of standby generation facilities.
- (c) On any occasion where unusual weather conditions adversely affect the operation of the sewage treatment works, the Consent Holder shall use its best endeavours to mitigate that adverse affect.





CONSENT NO.	CG0140001
SCHEDULE NO.	CG0140001 01

- (d) For a sample of the discharge to be considered for the purposes of (a) above, the Consent Holder shall notify the Agency by telefax or telephone as soon as unusual weather conditions are known to have adversely affected operations and shall confirm the circumstances in writing as soon as possible thereafter (and in any event within 14 days of the occurrence of such conditions). That notification shall include a full description of the unusual weather conditions and their impact on the operation of the works.

RECORDING AND REPORTING

19. (a) The Consent Holder shall establish and operate a documented maintenance programme and record all non-routine actions undertaken that may have adversely affected effluent quality. Copies of the programme shall be made available for inspection by the Agency's officers at all reasonable times.
- (b) On request the Consent Holder shall supply the Agency with a written report on the maintenance and all non-routine actions that may have adversely affected effluent quality.
20. The Consent Holder shall notify the Agency in writing if any known or planned introduction or material change in respect of discharges from trade premises to the sewerage system occurs, that may increase or introduce into the effluent any "dangerous substance" (set out in Annex 2 to this notice as updated from time to time and notified to the Consent Holder in writing), and any other substance considered by the Consent Holder as having or likely to have a significant effect on the receiving waters.

SUBSTANTIAL CHANGE

21. (a) A discharge shall not be made from the works if it would cause a significant increase in the polluting effects of the discharge on controlled waters as a result of a new or altered discharge of trade effluent into the works.
- (b) A discharge of trade effluent into the works is new if -
- (i) it is made by the sewerage undertaker and is of a kind not made into the works by the undertaker immediately before the date of effect of this consent; or



CONSENT NO.	CG0140001
SCHEDULE NO.	CG0140001 01



**ASiantaeth Yr
Amgylchedd Cymru
Environment
Agency Wales**

- (ii) it is made by a third party and the discharge is authorised on or after that date.
- (c) A discharge of trade effluent into the works is altered if -
 - (i) it is made by the sewerage undertaker and its composition or quantity changes significantly on or after the date of variation of this consent ; or
 - (ii) - it is made by a third party and the alteration of the discharge is authorised on or after that date.
- (d) An increase in the polluting effects of the discharge on controlled waters is not significant for the purposes of this condition if it relates to any characteristics of the discharge which are specifically regulated by conditions 13, 14, and 15 of this consent schedule but it may be significant if it is caused by a change in some other characteristic of the discharge.
- (e) For the purposes of this condition "trade effluent" means -
 - (i) any discharge by the sewerage undertaker other than
 - (1) domestic sewage from premises connected directly or indirectly to the works; or
 - (2) surface water run-off;
 - (ii) any discharge by a third party which is authorised under Chapter III of Part IV of the Water Industry Act 1991 or which is only accepted as a result of a contract with the sewerage undertaker.

UNAUTHORISED DISCHARGES CONDITION

- 22.
- (a) A discharge made from the works shall not contain any poisonous, noxious or polluting matter or solid waste matter which is attributable to any unauthorised discharge into the works.
 - (b) A discharge into the works is unauthorised if it is made by a third party and either there is no obligation to receive it or conditions subject to which there is an obligation to receive it are not observed.
 - (c) Nothing in this, or any other, condition of this consent prevents anyone from relying on any defence available to them under Section 87 of the Water Resources Act 1991.



CONSENT NO.	CG0140001
SCHEDULE NO.	CG0140001 01



ASiantaeth YR
AMGYLCHEDD CYMRU
ENVIRONMENT
AGENCY WALES

ANNEX 1

TABLE

<u>Column 1</u>	<u>Column 2</u>
Number of samples taken in any period of 12 months	Maximum number of samples permitted to exceed limit for given determinand
4-7	1
8-16	2
17-28	3
29-40	4
41-53	5
54-67	6
68-81	7
82-95	8
96-110	9
111-125	10
126-140	11
141-155	12
156-171	13
172-187	14
188-203	15
204-219	16
220-235	17
236-251	18
252-268	19
269-284	20
285-300	21
301-317	22
318-334	23
335-350	24
351-365	25



CONSENT NO.	CG0140001
SCHEDULE NO.	CG0140001 01



ASiantaeth Yr
AMGYLCHEDD CYMRU
ENVIRONMENT
AGENCY WALES

ANNEX 2

- | | |
|--|------------------------------|
| 1. Mercury and its compounds | 2. Cadmium and its compounds |
| 3. Hexachlorocyclohexane
(lindane and related compounds) | 4. Carbon tetrachloride |
| 5. DDT (the isomers of 1,1,1-trichloro-2,2 bis{p-chlorophenyl} ethane) | |
| 6. Pentachlorophenol (PCP) | 7. Aldrin |
| 8. Dieldrin | 9. Endrin |
| 10. Isodrin | 11. Hexachlorobenzene (HCB) |
| 12. Hexachlorobutadiene (HCBd) | 13. Chloroform |
| 14. Polychlorinated biphenyls | 15. Dichlorvos |
| 16. 1,2-Dichloroethane | 17. Trichlorobenzene |
| 18. Atrazine | 19. Simazine |
| 20. Tributyltin compounds | 21. Triphenyltin compounds |
| 22. Trifluralin | 23. Fenitrothion |
| 24. Azinphos-methyl | 25. Malathion |
| 26. Endosulfan | 27. Lead |
| 28. Chromium | 29. Zinc |
| 30. Copper | 31. Nickel |
| 32. Arsenic | 33. *Iron |
| 34. *pH outside range 5.5 to 9.0 | 35. *Boron |
| 36. Vanadium | 37. PCSD'S |
| 38. Cyfluthrin | 39. Sulcofuron |
| 40. Flucifuron | 41. Permethrin |
| 42. 4-Chloro-3-methyl-phenol | 43. 2-Chlorophenol |
| 44. 2,4-Dichlorophenol | 45. 2,4-D (ester) |
| 46. 2,4-D (non ester) | 47. 1,1,1-Trichloroethane |
| 48. 1,1,2-Trichloroethane | 49. Bentazone |
| 50. Benzene | 51. Biphenyl |
| 52. Chloronitrotoluenes | 53. Demeton |
| 54. Dimethoate | 55. Linuron |
| 56. MCPA | 57. Mecoprop |
| 58. Mevinphos | 59. Napthalene |
| 60. Omethoate | 61. Toluene |
| 62. Triazophos | 63. Xylene |
| 64. Cyanide | 65. Azinphos-ethyl |
| 66. Fenthion | 67. Parathion |
| 68. Parathion-methyl | 69. Trichloroethylene |
| 70. Tetrachloroethylene | 71. Dioxins |
| 72. PAHs | 73. Nonyl phenol |
| 74. Nonyl phenyl ethoxylate | 75. Di-ethylhexyl phthalate |
| 76. Bisphenol-A | 77. Diazinon |
| 78. Chlorfenvinphos | 79. Chlorotoluron |
| 80. Isoproturon | 81. Diuron |
| 82. Propetamphos | 83. Flumethrin |
| 84. Amitraz | 85. High-Cis Cypermethrin |
| 86. Cyromazine | 87. Deltamethrin |
| 88. Cypermethrin | |

This list is applicable as at 1 December 1998 and will be updated as and when changes to the relevant legislative requirements occur.

*Notification to the Agency by the Consent holder is only required in respect of changes to trade effluents likely to cause significant changes to the pH value, and/or iron or boron concentrations, of the crude sewage.




CONSENT NO.	CG0140001
SCHEDULE NO.	CG0140001 01



ASiantaeth YR
AMGYLCHEDD CYMRU
ENVIRONMENT
AGENCY WALES

ANNEX 3

Plan CG0140001

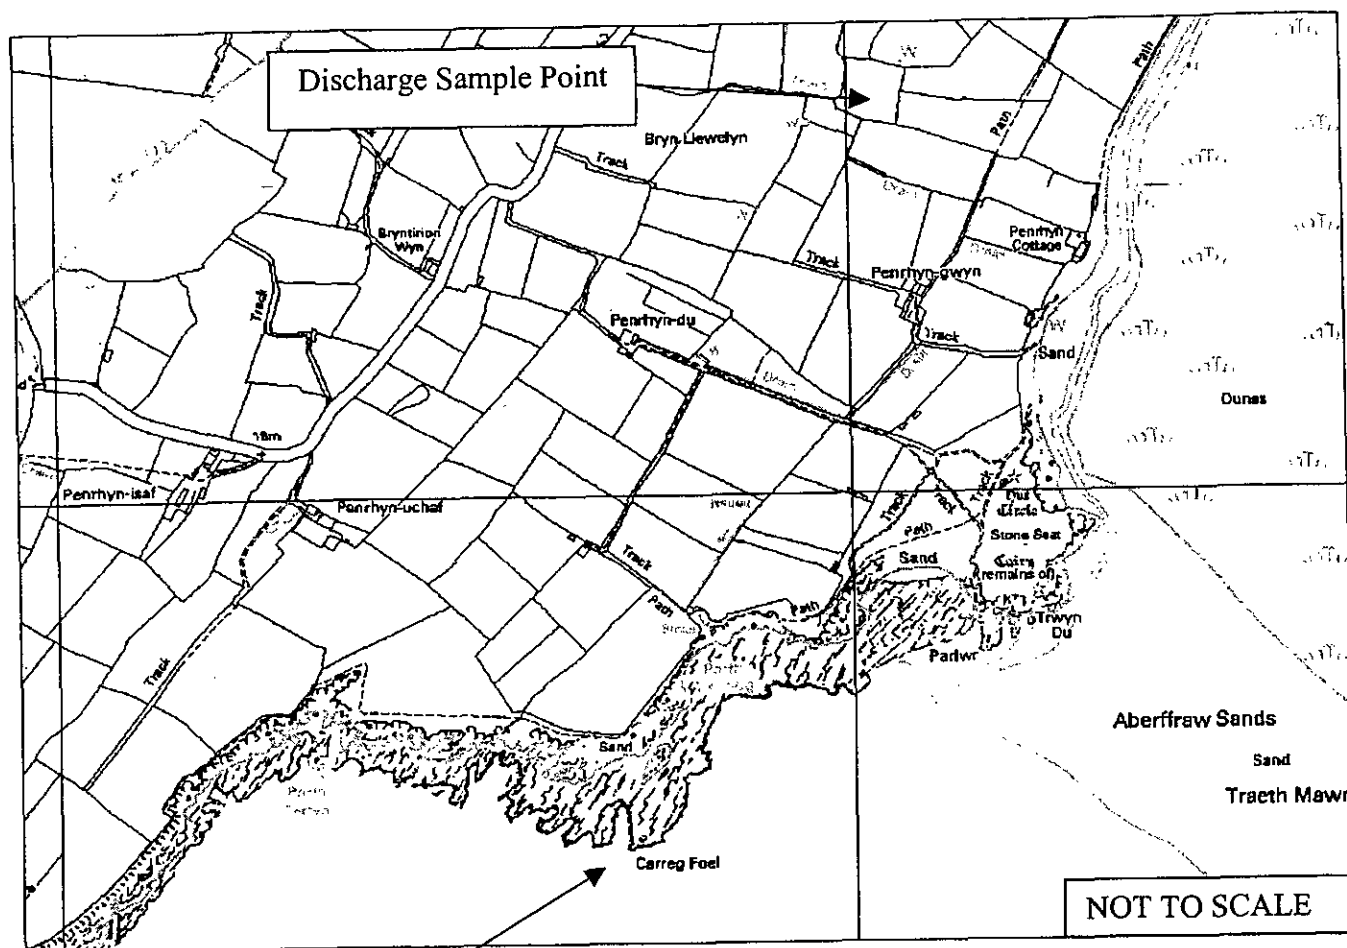

Discharge Point

Reproduced from the Ordnance Survey mapping with the permission of the Controller of Her Majesty's Stationary Office © Crown copyright. Unauthorised reproduction infringes Crown copyright and may lead to prosecution or civil proceedings. Licence No: GD03177G

