


INSTALLATION SEQUENCE - DIG & PUSH LOWERING FRAMES METHOD

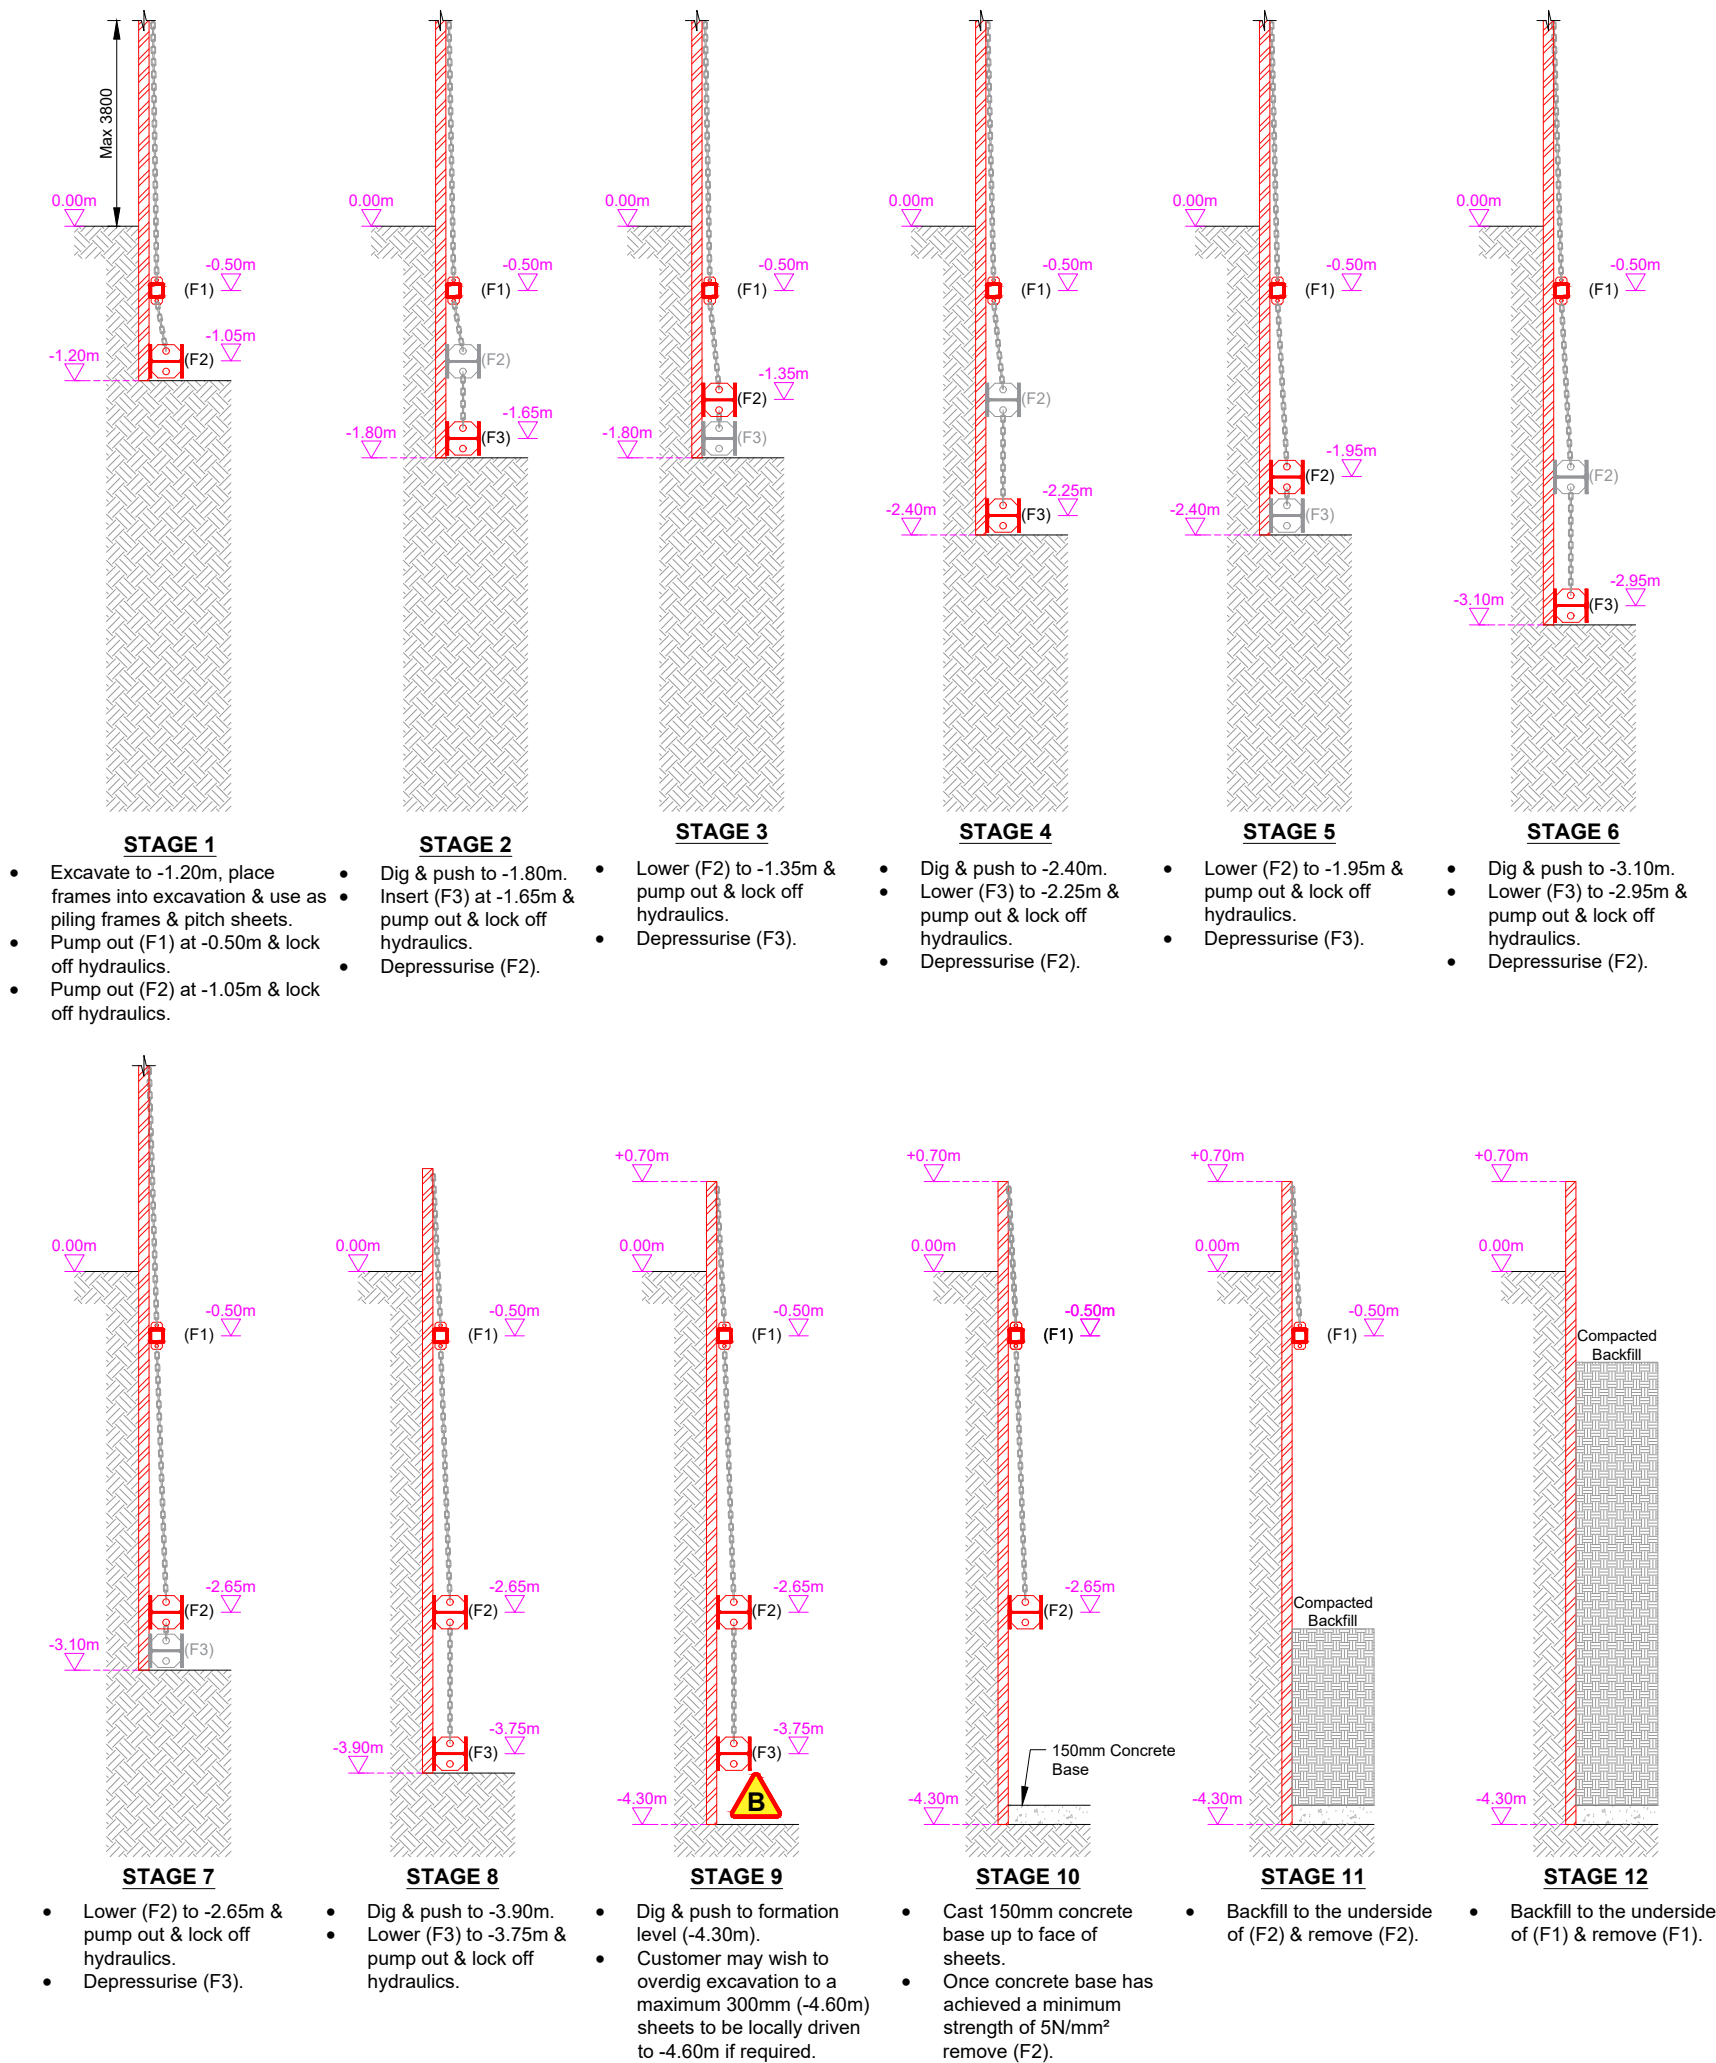

CAUTION!

Customer to provide safe method of working for the excavation and installation of (F1) an (F2) and sheets down to 1.2m depth.

CAUTION!

Customer may wish to overdig excavation to a maximum 300mm (-4.60m) sheets to be locally driven to overdig level if required.

DO NOT SCALE FROM THIS DRAWING

© The Copyright and/or Design Right of this drawing is vested in MGF Design Services Ltd and any reproduction or copying without permission will be construed as an infringement of our Rights and remedial action will be taken.

DESIGN REFERENCE: 45240 Rev A3

DRAWING NUMBERING	SECTION & DETAIL NOTATION
100 Series - Layouts / ID/D Drawings	201A Denotes Section A on drawing 201
200 Series - Sections	301B Denotes Detail B on drawing 301
300 Series - Details	
500 Series - Fabrication Drawings	


GENERAL NOTES

- All dimensions are in (mm), Levels in (m), Weights in (kg).
- This drawing should **NOT** be scaled from. This drawing should be read in conjunction with a relevant site specific, Safe System of Work (SSoW).
- For further information on MGF products (including risk assessments, technical information and guidance for SSoW), visit www.mgf.ltd.uk.
- MGF recommend that the temporary works are inspected before each working shift by a competent person. (Normally the temporary works coordinator or supervisor).

LEGEND



TRENCH SHEET DETAILS



WEIGHTS SCHEDULES

'D' Leg		MGF 254UC Brace	
Component	Weight	Component	Weight
200 Series 4900-6000 'D' leg	500kg	300kN Hydraulic Ram	508kg
Assembly	2000kg	0.60m Extension	123kg
		2.00m Extension	290kg



RESIDUAL RISKS



- A. Ground Conditions**
If ground conditions or groundwater level vary from those shown on this drawing then seek advice from MGF DSL before proceeding.
- B. Unplanned Excavation (Over-dig)**
This design has considered for a 300mm overdig allowance as shown for soft spots.
- C. Surcharging of Material**
Customer to avoid surcharging excavation with spoil or other plant/materials (Max 10kN/m²).
- D. Services**
Care should be taken to prevent damage to existing services. Exposed services should be suitably supported.
- E. Assembly & Dismantling of Manhole Brace Frames**
It is the responsibility of the customer to produce a method statement for the safe assembly and dismantling of the manhole brace frames.

IF IN DOUBT ...ASK!

A3	Installation Sequence Amended	19.06.18	Patrick Marshall	Sam Cox	Richard Lawrenson
A2	Installation Sequence Amended	07.02.17	Duncan Knights	Chris Atherton	Richard Lawrenson
A1	For Approval	18.01.17	Duncan Knights	Sam Cox	Richard Lawrenson
Issue	Issue Description	Date	Designed	Drawn	Checked
Issue Status					

FOR APPROVAL

MGF EXCAVATION SAFETY SOLUTIONS
Design Services Ltd
Commitment • Innovation • Sustainability
design@mgf.ltd.uk | www.mgf.ltd.uk | 01942 402 704

Customer
Forkers Ltd
Civil & Ground Engineering Contractors

Site
Albany Street, Newport

Scheme
Manhole SW1

Drawing Title
Installation Sequence

Drawing No
45240-101

Rev
A3